Product Environmental Profile

Wiser Door Gateway TwinBus







General information

Representative product

Wiser Door Gateway TwinBus -RGE1798500


Description of the product

This is an Twinbus based gateway controller for video door entry system

Functional unit

Connect/Disconnect during 10 years between earthnet and WiFi router to let mobile phone to remote communicate with outdoor unit of video door entry system which is based on existing Twinbus system protocol. U=230V,In=0.02A

Constituent materials

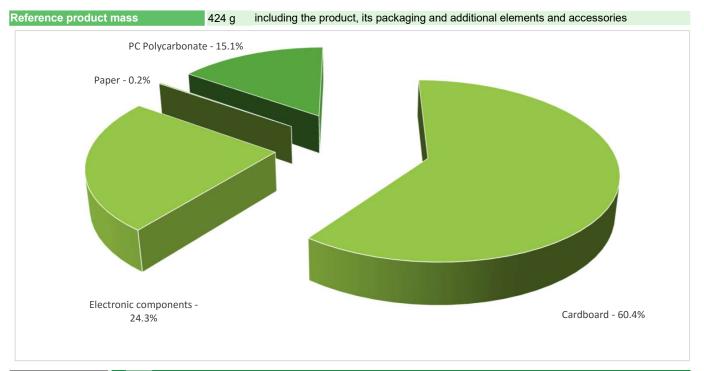

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

	The Wiser Door Gateway TwinBus presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
Distribution	Packaging weight is 255.7 g, consisting of Cardboard(99%),paper(1%)						
	Product distribution optimised by setting up local distribution centres						
Installation	Ref RGE1798500 does not require any installation operations.						
Use	The product does not require special maintenance operations.						
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
	This product contains Electronic card:35.2g that should be separated from the stream of waste so as to optimize end-of life treatment.						
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website						
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page						
	Recyclability potential: Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						

Environmental impacts

Reference life time	10 years						
Product category	Active products						
Installation elements	No special components needed						
Use scenario	The product is in active mode 1% of the time with a power use of 5W and in stand-by mode 99% of the time with a power use of 3.2W for 10 years.						
Geographical representativeness	Europe						
Technological representativeness	This is an Twinbus based gateway controller for video door entry system						
	Manufacturing	Installation	Use	End of life			
Energy model used	Energy model used: China	Electricity grid mix; AC; consumption mix, at consumer; 230V; FR	Electricity grid mix; AC; consumption mix, at consumer; 230V; FR	Electricity grid mix; AC; consumption mix, at consumer; 230V; FR			

Compulsory indicators Wiser Door Gateway TwinBus - RGE1798500							
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	5.08E-03	5.07E-03	0*	0*	1.50E-05	0*
Contribution to the soil and water acidification	$kg SO_2 eq$	1.45E-01	3.02E-02	2.50E-04	7.32E-05	1.14E-01	6.47E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.93E-02	8.84E-03	5.75E-05	1.72E-05	1.04E-02	2.50E-05
Contribution to global warming	kg CO ₂ eq	5.76E+01	2.68E+01	5.47E-02	2.37E-02	3.07E+01	6.72E-02
Contribution to ozone layer depletion	kg CFC11 eq	4.72E-05	3.34E-06	0*	0*	4.38E-05	0*
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	9.96E-03	3.33E-03	1.78E-05	7.94E-06	6.60E-03	5.99E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	7.26E+02	1.44E-01	0*	0*	7.26E+02	0*
Total Primary Energy	MJ	3.09E+03	2.91E+02	7.74E-01	3.70E-01	2.80E+03	0*

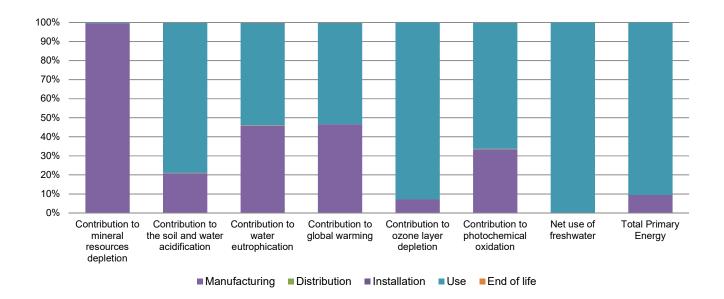

Optional indicators		Wiser Door	Gateway TwinBus	s - RGE179850	0		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	6.41E+02	2.87E+02	7.69E-01	3.37E-01	3.53E+02	2.74E-01
Contribution to air pollution	m³	3.18E+03	2.15E+03	2.33E+00	2.61E+00	1.02E+03	2.12E+00
Contribution to water pollution	m³	4.04E+03	2.48E+03	9.00E+00	2.79E+00	1.55E+03	3.55E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3.21E-05	3.21E-05	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.19E+02	1.63E+01	0*	0*	2.03E+02	0*
Total use of non-renewable primary energy resources	MJ	2.87E+03	2.75E+02	7.72E-01	3.69E-01	2.59E+03	2.95E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.14E+02	1.10E+01	0*	0*	2.03E+02	0*
Use of renewable primary energy resources used as raw material	MJ	5.27E+00	5.27E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.87E+03	2.71E+02	7.72E-01	3.69E-01	2.59E+03	2.95E-01
Use of non renewable primary energy resources used as raw material	MJ	3.12E+00	3.12E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.22E+01	1.16E+01	0*	2.58E-01	5.78E-02	3.03E-01
Non hazardous waste disposed	kg	6.85E+01	5.77E+00	0*	0*	6.27E+01	0*
Radioactive waste disposed	kg	9.28E-01	2.55E-03	0*	0*	9.26E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3.66E-01	4.57E-02	0*	2.54E-01	0*	6.56E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.60E-02	9.30E-05	0*	0*	0*	1.59E-02
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

 Registration N°
 ENVPEP1706009_V1
 Drafting rules
 PCR-ed3-EN-2015 04 02

 Date of issue
 06/2017
 Supplemented by Information and reference documents
 PSR-0005-ed2-EN-2016 03 29

 Validity period
 5 years
 www.pep-ecopassport.org

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental

declarations »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1706009_V1 © 2016 - Schneider Electric – All rights reserved

06/2017