Product Environmental Profile

VAYU DM3110 EASY LOGIC









General information

5\Constituent materials

Representative product	VAYU DM3110 EASY LOGIC - METSEDM3110
Description of the product	The main function of the EASYLOGIC DM3110 Digital panel meters is to mesure the 3 phase Current (Ampere) with class 0.5 accuracy. It has large 7 segment numeric LED display, intuitive navigation for CT ratio setting & 3 phase navigation with self-guided 1 button. Bright red colour LEDs of 14.2 mm (0.55 in) height with 4 LEDs for indicating the phase unit.
Functional unit	To measure and display the 3 phase load currents for 10 years.

Reference product mass 380 g including the product, its packaging and additional elements and accessories PE Polyethylene - 0.9% PVC Polychlorure de vinyle - . UP Polyester - 0.4% 6.5% Steel - 4.7% Brass - 2.5% PC Polycarbonate - 23.3% Cardboard - 30.1% Various - 1.4% Paper - 6.1% Electronic components -24.2% Diactics 31 1%

FIDSLICS	51.170
Metals	7.2%
Others	61.8%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

لا الله Additional environmental information

SCHN-00352-V01.01-EN - PEP ECOPASSPORT® - VAYU DM3110 EASY LOGIC

The VAYU DM3110 EASY LOGIC presents the following relevent environmental aspects							
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 142.4 g, consisting of Paper (16%),Cardboard (81%), PE Polyethylene (3%) Product distribution optimised by setting up local distribution centres						
Use	The product does not require special maintenance operations.						
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Electronic Card (43.41 g), Current Transfomers (40.5 g), Display (8 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.						
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website						
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page						
	Recyclability potential:13%Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						


Q Environmental impacts

Reference life time	10 years					
Product category	Other equipments - Active product					
Installation elements	Ref METSEDM3110 does not require any special components for installation operations. TO CHECK IN THE USER MANUAL => TO CREATE A SQUARE HOLE					
Use scenario	Full load is 2W at worst case scenario. According to PSR 005, @100% loading rate, 2*1=2 W					
Geographical representativeness	Europe					
Technological representativeness The main function of the EASYLOGIC DM3110 Digital panel meters is to mesure the 3 phase Current (Ampere) with class 0.5 accuracy. It has large 7 segment numeric LED display, intuitive navigation for CT ratio setting & 3 phase navigation with self-guided 1 button. Bright red colour LEDs of 14.2 mm (0.55 in) height with 4 LEDs for indicating the phase unit.						
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: India	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27		

Compulsory indicators	VAYU DM3110 EASY LOGIC - METSEDM3110						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3.21E-04	3.13E-04	0*	0*	7.46E-06	0*
Contribution to the soil and water acidification	$kg SO_2 eq$	3.87E-01	2.86E-02	2.24E-04	0*	3.58E-01	1.05E-04
Contribution to water eutrophication	kg PO4 ³⁻ eq	3.73E-02	1.53E-02	5.16E-05	3.27E-04	2.16E-02	4.67E-05
Contribution to global warming	kg CO ₂ eq	1.07E+02	2.08E+01	4.90E-02	1.80E-01	8.58E+01	1.37E-01
Contribution to ozone layer depletion	kg CFC11 eq	7.49E-06	1.89E-06	0*	0*	5.59E-06	4.97E-09
Contribution to photochemical oxidation	$kg C_2H_4 eq$	2.30E-02	3.30E-03	1.60E-05	4.28E-05	1.97E-02	9.22E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.11E+02	2.14E-01	0*	0*	3.11E+02	0*
Total Primary Energy	MJ	2.02E+03	3.03E+02	6.93E-01	0*	1.71E+03	4.63E-01

100%

SCHN-00352-V01.01-EN - PEP ECOPASSPORT® - VAYU DM3110 EASY LOGIC

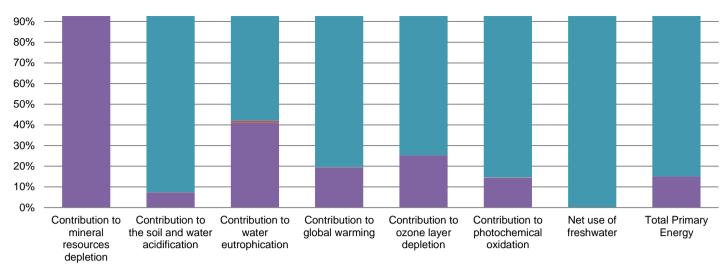

Manufacturing Distribution In

Installation Use

End of life

Optional indicators		VAYU DM3110 EASY LOGIC - METSEDM3110					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.29E+03	3.16E+02	6.89E-01	0*	9.74E+02	4.30E-01
Contribution to air pollution	m³	5.65E+03	1.95E+03	2.09E+00	1.14E+00	3.69E+03	3.36E+00
Contribution to water pollution	m³	4.99E+03	1.43E+03	8.06E+00	8.74E+00	3.54E+03	6.41E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.09E-01	1.09E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.33E+02	1.50E+01	0*	0*	2.18E+02	0*
Total use of non-renewable primary energy resources	MJ	1.79E+03	2.88E+02	6.92E-01	0*	1.50E+03	4.62E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.30E+02	1.22E+01	0*	0*	2.18E+02	0*
Use of renewable primary energy resources used as raw material	MJ	2.79E+00	2.79E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.78E+03	2.87E+02	6.92E-01	0*	1.50E+03	4.62E-01
Use of non renewable primary energy resources used as raw material	MJ	1.54E+00	1.54E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.68E+00	3.11E+00	0*	0*	4.48E-02	5.25E-01
Non hazardous waste disposed	kg	3.27E+02	6.98E+00	0*	1.46E-01	3.20E+02	0*
Radioactive waste disposed	kg	2.15E-01	1.45E-03	0*	0*	2.14E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5.38E-02	2.29E-02	0*	0*	0*	3.09E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.61E-02	6.53E-04	0*	0*	0*	3.54E-02
Exported Energy	MJ	1.33E-02	0*	0*	1.33E-02	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.7.0.3, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

SCHN-00352-V01.01-EN - PEP ECOPASSPORT® - VAYU DM3110 EASY LOGIC

Registration number :	SCHN-00352-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02				
Verifier accreditation N°	VH33	Supplemented by	PSR-0005-ed2-EN-2016 03 29				
Date of issue	06/2018	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of	Independent verification of the declaration and data, in compliance with ISO 14025 : 2010						
Internal	External X						
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)							
PEP are compliant with XP C08-100-1 :2014							
The elements of the present PEP cannot be compared with elements from another program.							
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »							
Schneider Electric Industries S	SAS						
Country Customer Care Cente	Country Customer Care Center						

http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00352-V01.01-EN

Published by Schneider Electric

© 2017 - Schneider Electric – All rights reserved

06/2018