# **Product Environmental Profile**

#### **USB A/C 5.4A CHARGR TR DUPLX 15A RECP WH**









### General information

Representative product

USB A/C 5.4A CHARGR TR DUPLX 15A RECP WH - SQR55153WH

Description of the product

The USB charger will charge most compatible electronic devices directly without an adapter and can replace a standard duplex receptacle.

Functional unit


The USB charger provides overheating, overcurrent and overvoltage protection during the 20 years. the tamperresistant shutter complies with the 2011 NEC 406.11 standard and it can replace standard duplex receptacle. It can be used in cafeterias, offices, residential, restaurants etc. The function unit is accordance with the following technical data:

- Input voltage: 125Vac, 0.7A.

- Output voltage: 125Vdc, 0.7A.

### **Constituent materials**

Reference product mass 211.56 g including the product, its packaging and additional elements and accessories

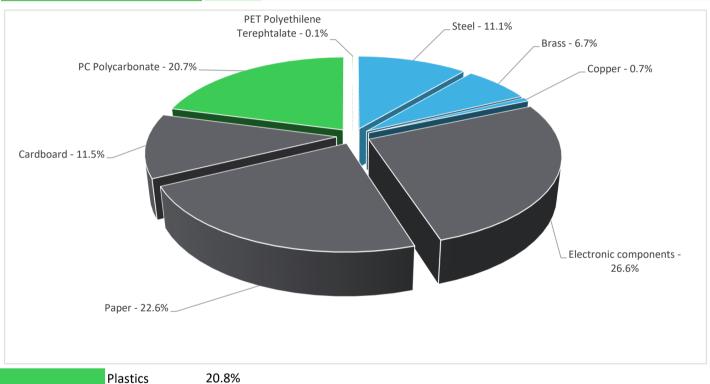

 Plastics
 20.8%

 Metals
 18.5%

 Others
 60.7%



#### **Substance assessment**

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE, Bis(2-ethylhexyl) phthalate -DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

 $\underline{\text{http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page}$ 


## Additional environmental information

Manufacturing	Manufactured at a production site complying with the regulations					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
	Packaging weight is 73 g, consisting of cardboard (33.8%), paper (66.2%)					
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
	This product contains Electronic card (58.1g) that should be separated from the stream of waste so as to optimize end- of-life treatment.					
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page					
	Based on "ECO'DEEE recyclability and recoverability calculation method"  Recyclability potential: 29% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

## **Environmental impacts**

Reference life time	20 ( Product lifetime is 10 years, consider two products based on PSR0005.)					
Product category	USB socket					
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.					
Use scenario	Load rate: 100 % of the rated current according to the USB standards Use rate: 30% de the RLT					
Geographical representativeness	US					
Technological representativeness	All the technologies pertaining to product manufacturing are represented in manufacturing phase properly					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US		

Compulsory indicators	USB A/C 5.4A CHARGR TR DUPLX 15A RECP WH - SQR55153WH						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	6.73E-04	6.62E-04	0*	0*	1.15E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.14E+00	1.39E-02	2.49E-04	0*	1.12E+00	1.36E-04
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	2.98E-01	2.45E-03	5.74E-05	0*	2.95E-01	6.57E-05
Contribution to global warming	kg CO <sub>2</sub> eq	1.18E+03	5.47E+00	0*	0*	1.17E+03	2.03E-01
Contribution to ozone layer depletion	kg CFC11 eq	2.18E-05	5.97E-07	0*	0*	2.12E-05	7.11E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.81E-01	1.35E-03	0*	0*	1.80E-01	0*
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2.10E+00	3.53E-02	0*	0*	2.07E+00	0*
Total Primary Energy	MJ	1.58E+04	7.16E+01	0*	0*	1.58E+04	0*

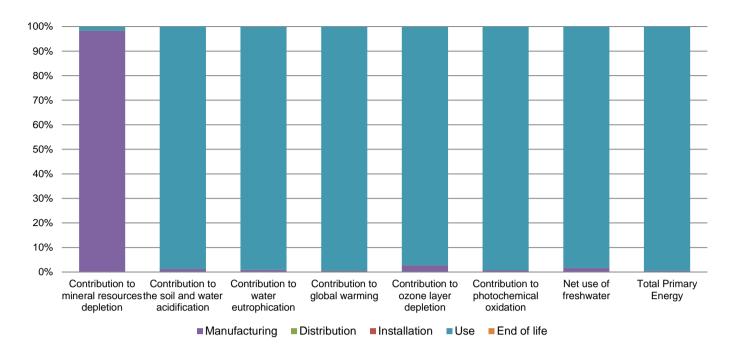

Optional indicators		USB A/C 5.4A CHARGR TR DUPLX 15A RECP WH - SQR55153WH					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.43E+04	4.78E+01	0*	0*	1.43E+04	0*
Contribution to air pollution	m³	1.00E+05	8.03E+02	0*	0*	9.94E+04	0*
Contribution to water pollution	m³	5.88E+04	1.06E+03	8.98E+00	0*	5.77E+04	8.89E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7.99E-03	7.99E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	9.50E+02	3.28E+00	0*	0*	9.46E+02	0*
Total use of non-renewable primary energy resources	MJ	1.49E+04	6.83E+01	0*	0*	1.48E+04	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	9.47E+02	6.62E-01	0*	0*	9.46E+02	0*
Use of renewable primary energy resources used as raw material	MJ	2.62E+00	2.62E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.49E+04	6.44E+01	0*	0*	1.48E+04	0*
Use of non renewable primary energy resources used as raw material	MJ	3.95E+00	3.95E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.06E+01	8.68E+00	0*	0*	3.13E+01	6.00E-01
Non hazardous waste disposed	kg	1.82E+02	2.55E+00	0*	0*	1.79E+02	0*
Radioactive waste disposed	kg	1.92E-02	7.97E-04	0*	0*	1.84E-02	3.81E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.58E-01	3.14E-02	0*	1.45E-01	0*	8.10E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5.45E-02	0*	0*	0*	0*	5.45E-02
Exported Energy	MJ	4.61E-04	4.34E-05	0*	4.18E-04	0*	0*

 $<sup>^{\</sup>star}$  represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2011022_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	03/2021	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center

http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP2011022\_V1

Published by Schneider Electric

© 2019 - Schneider Electric - All rights reserved

03/2021