Product Environmental Profile

ABL8 TEQ24600 Linear power supply











General information

Representative product ABL8 TEQ24600

Description of the product

The main purpose of the ABL8 TEQ24600 is to convert electricity from 380/400/420 Voltage


Alternative Current input to 24 Voltage Continuous Current output

Functional unit To convert electricity from 380/400/420V AC to 24V DC for 10 years

Constituent materials

Reference product mass

38000 g including the product and its packaging

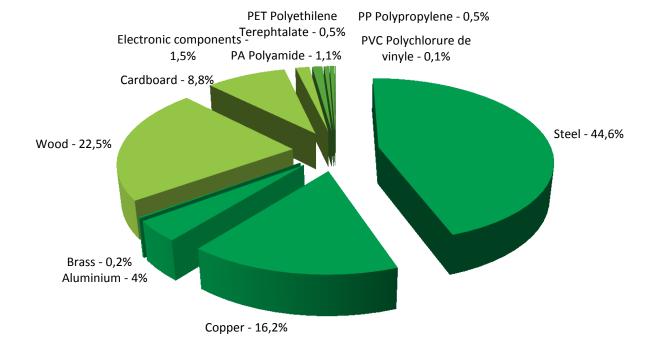

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


(1) Additional environmental information

	The ABL8 TEQ24600 present	s the following relevent environmental aspects				
Manufacturing	Manufactured at a production site complying with the regulations					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 12000 g, consisting of wood (71%), cardboard (27%) and PP (2%) Product distribution optimised by setting up local distribution centers					
Installation	The installation phase varies depending on the installation configuration (use of screws or not for example). As they lead to non significant impact, the installation operations have been excluded from the study scope. In addition, the installation phase includes the packaging end of life treatment.					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the a	mount of waste and allow recovery of the product components and materials				
	This product contains electronic card (567g) that should be separated from the stream of waste so as to optimize end-of-life treatment.					
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website					
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page					
	Recyclability potential: 88%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				

Environmental impacts

Reference life time	10 years					
Product category	Active products					
Installation elements	The installation phase varies depending on the installation configuration (use of screws or not for example). In this PEP, they have been excluded from the scope.					
Use scenario	Consumed power is 484 W 60 % of the time in Active mode, 18 W 25 % of the time in Standby mode, 0 W 0 % of the time in Sleep mode and 0 W 15 % of the time in Off mode.					
Geographical representativeness	Europe					
Technological representativeness	The main purpose of the ABL8 TEQ24600 is to convert electricity from 380/400/420 Voltage Alternative Current input to 24 Voltage Continuous Current output					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Czech Republic	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27		

Compulsory indicators		ABL8 TEQ24	600 - ABL8 TEQ24600				
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1,04E-02	9,33E-03	0*	0*	1,10E-03	0*
Contribution to the soil and water acidification	kg SO ₂ eq	5,36E+01	7,44E-01	2,95E-02	0*	5,28E+01	7,66E-03
Contribution to water eutrophication	kg PO ₄ 3- eq	3,29E+00	9,17E-02	6,80E-03	8,31E-04	3,19E+00	1,97E-03
Contribution to global warming	kg CO ₂ eq	1,28E+04	1,55E+02	6,40E+00	0*	1,27E+04	3,29E+00
Contribution to ozone layer depletion	kg CFC11 eq	8,37E-04	1,23E-05	0*	0*	8,25E-04	1,81E-07
Contribution to photochemical oxidation	kg C₂H₄ eq	2,96E+00	5,83E-02	2,11E-03	3,76E-04	2,90E+00	8,13E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life

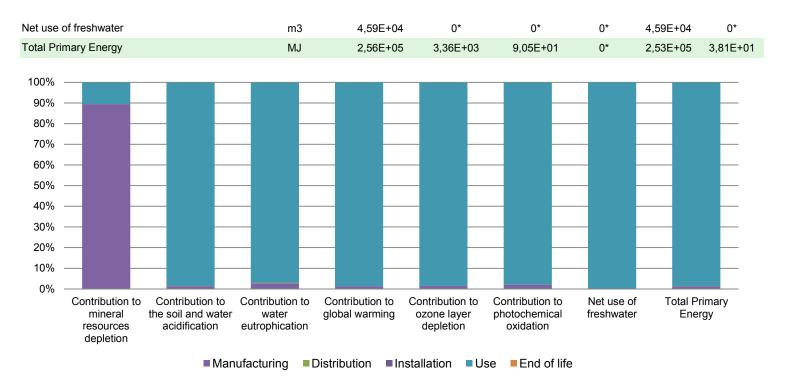

Optional indicators	ABL8 TEQ24600 - ABL8 TEQ24600						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,46E+05	1,78E+03	8,99E+01	1,60E+01	1,44E+05	3,48E+01
Contribution to air pollution	m³	5,91E+05	4,59E+04	2,78E+02	1,25E+02	5,45E+05	2,70E+02
Contribution to water pollution	m³	5,36E+05	1,27E+04	1,05E+03	1,33E+02	5,22E+05	3,10E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,10E+01	1,10E+01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,24E+04	2,55E+02	0*	0*	3,21E+04	0*
Total use of non-renewable primary energy resources	MJ	2,24E+05	3,11E+03	9,04E+01	0*	2,21E+05	3,81E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,22E+04	6,02E+01	0*	0*	3,21E+04	0*
Use of renewable primary energy resources used as raw material	MJ	1,95E+02	1,95E+02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,24E+05	3,07E+03	9,04E+01	0*	2,21E+05	3,81E+01
Use of non renewable primary energy resources used as raw material	MJ	3,49E+01	3,49E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	8,08E+02	7,54E+02	0*	1,83E+01	6,60E+00	2,96E+01
Non hazardous waste disposed	kg	4,73E+04	1,08E+02	0*	0*	4,72E+04	0*
Radioactive waste disposed	kg	3,16E+01	4,80E-02	0*	0*	3,15E+01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3,33E+01	4,98E+00	0*	5,77E+00	0*	2,25E+01
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,81E-01	4,66E-03	0*	0*	0*	2,76E-01
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

SCHN-00182-V01.01-EN - PEP ECOPASSPORT® - ABL8 TEQ24600

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N° SCHN-00182-V01.01-EN Drafting rules PCR-ed3-EN-2015 04 02

Verifier accreditation N° VH15 Supplemented by PSR-0005-ed2-EN-2016 03 29

Date of issue 12/2016 Information and reference documents

Validity period 5 years

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00182-V01.01-EN © 2016 - Schneider Electric – All rights reserved