# **Product Environmental Profile**

#### Wiser AvatarOn 2K Freelocate,WG






### General information

Representative product	Wiser AvatarOn 2K Freelocate,WG - E8332RWMZB_WG				
Description of the product	To control VISA SmartHome for Asia Zigbee products like switches, dimmers, curtain switches and so on at a distance flexibility and ease of use.				
Functional unit	To control a group of Wiser Zigbee devices after successful commissioning. The device can be configured either through the Wiser by SE app or through E-mode commissioning. It charge power from 2 batteries of 3VDC,CR2032. The function unit is accordance with the following technical data:  - Maximum transmitted power ≤ 10 dBm - IP20 - Frequency range from 2400 MHz to 2483.5 MHz				

#### Constituent materials

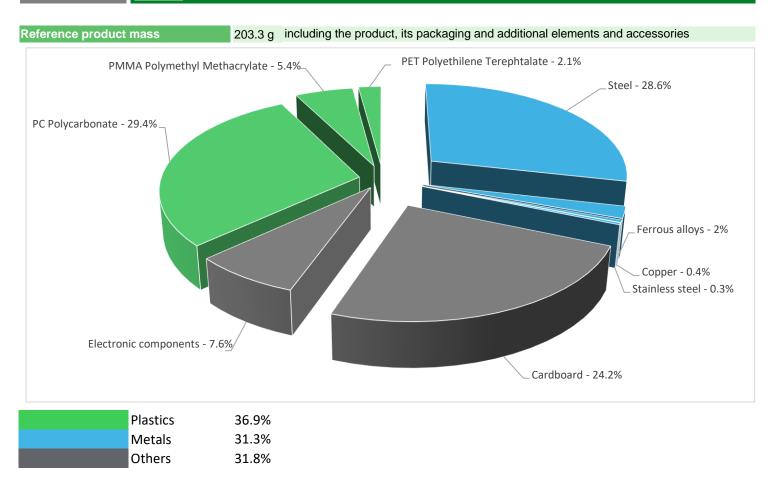

#### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>


## Additional environmental information

	The Wiser AvatarOn 2K Freelocate,WG presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
Distribution	Packaging weight is 53.6 g, consisting of cardboard (92%), APET(8%)						
Installation	Reference E8332RWMZB_WG does not require any installation operations. Packaging waste is considered in installation.						
Use	2 batteries of 2.8g/each have to be changed every 2 years.						
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
	This product contains electronic card (11.3g), 2 batteries(5.6g) that should be separated from the stream of waste so as to optimize end-of-life treatment.						
End of life  The location of these components and other recommendations are given in the End of Life Instruction doc is available on the Schneider-Electric Green Premium website							
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page						
	Based on "ECO'DEEE recyclability and recoverability calculation method"  Recyclability potential: 42% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						

## Environmental impacts

Reference life time	10 years					
Product category	Other equipments - Active product					
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.					
Use scenario	The two batteries that will have to be replaced during the life of the products.					
Geographical representativeness	Vietnam					
Technological representativeness	To control VISA SmartHome for Asia Zigbee products like switches, dimmers, curtain switches and so on at a distance flexibility and ease of use.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 127-220V; VN	Electricity mix; AC; consumption mix, at consumer; 127-220V; VN	Electricity mix; AC; consumption mix, at consumer; 127-220V; VN		

Wiser AvatarOn 2K Freelocate,WG - E8332RWMZB_WG						
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
kg Sb eq	4.38E-04	4.38E-04	0*	0*	0*	0*
$kg SO_2 eq$	5.03E-03	4.85E-03	1.20E-04	1.28E-05	0*	5.39E-05
kg PO <sub>4</sub> <sup>3-</sup> eq	1.07E-03	1.02E-03	2.76E-05	4.36E-06	0*	1.79E-05
kg CO <sub>2</sub> eq	2.50E+00	2.42E+00	2.62E-02	3.10E-03	0*	4.22E-02
kg CFC11 eq	2.30E-07	2.28E-07	5.31E-11	0*	0*	1.85E-09
kg C <sub>2</sub> H <sub>4</sub> eq	5.22E-04	5.07E-04	8.55E-06	9.60E-07	0*	5.42E-06
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
m3	1.51E-02	1.51E-02	2.35E-06	0*	0*	3.19E-05
MJ	3.40E+01	3.34E+01	3.71E-01	3.97E-02	0*	2.62E-01
	Unit  kg Sb eq  kg SO $_2$ eq  kg PO $_4$ eq  kg CO $_2$ eq  kg CFC11  eq  kg C $_2$ H $_4$ eq  Unit  m3	Unit     Total       kg Sb eq $4.38E-04$ kg SO <sub>2</sub> eq $5.03E-03$ kg PO <sub>4</sub> eq $1.07E-03$ kg CO <sub>2</sub> eq $2.50E+00$ kg CFC11 eq $2.30E-07$ kg C <sub>2</sub> H <sub>4</sub> eq $5.22E-04$ Unit     Total       m3 $1.51E-02$	Unit         Total         Manufacturing           kg Sb eq         4.38E-04         4.38E-04           kg SO <sub>2</sub> eq         5.03E-03         4.85E-03           kg PO <sub>4</sub> eq         1.07E-03         1.02E-03           kg CO <sub>2</sub> eq         2.50E+00         2.42E+00           kg CFC11 eq         2.30E-07         2.28E-07           kg C <sub>2</sub> H <sub>4</sub> eq         5.22E-04         5.07E-04           Unit         Total         Manufacturing           m3         1.51E-02         1.51E-02	UnitTotalManufacturingDistributionkg Sb eq $4.38E-04$ $4.38E-04$ $0^*$ kg SO2 eq $5.03E-03$ $4.85E-03$ $1.20E-04$ kg PO43* eq $1.07E-03$ $1.02E-03$ $2.76E-05$ kg CO2 eq $2.50E+00$ $2.42E+00$ $2.62E-02$ kg CFC11 eq $2.30E-07$ $2.28E-07$ $5.31E-11$ kg C2H4 eq $5.22E-04$ $5.07E-04$ $8.55E-06$ UnitTotalManufacturingDistributionm3 $1.51E-02$ $1.51E-02$ $2.35E-06$	Unit         Total         Manufacturing         Distribution         Installation           kg Sb eq $4.38E-04$ $4.38E-04$ $0^*$ $0^*$ kg SO <sub>2</sub> eq $5.03E-03$ $4.85E-03$ $1.20E-04$ $1.28E-05$ kg PO <sub>4</sub> eq $1.07E-03$ $1.02E-03$ $2.76E-05$ $4.36E-06$ kg CO <sub>2</sub> eq $2.50E+00$ $2.42E+00$ $2.62E-02$ $3.10E-03$ kg CFC11 eq $2.30E-07$ $2.28E-07$ $5.31E-11$ $0^*$ kg C <sub>2</sub> H <sub>4</sub> eq $5.22E-04$ $5.07E-04$ $8.55E-06$ $9.60E-07$ Unit         Total         Manufacturing         Distribution         Installation           m3 $1.51E-02$ $1.51E-02$ $2.35E-06$ $0^*$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$

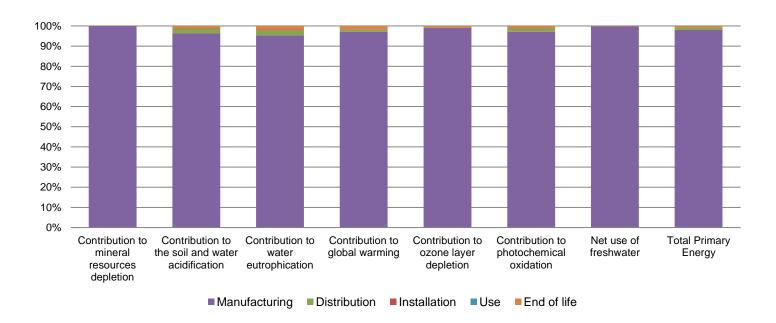

Optional indicators		Wiser Avata	rOn 2K Freelocat	e,WG - E8332R	RWMZB_WG		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.20E+01	2.14E+01	3.69E-01	3.90E-02	0*	2.07E-01
Contribution to air pollution	m³	2.81E+02	2.78E+02	1.12E+00	1.53E-01	0*	2.01E+00
Contribution to water pollution	m³	5.55E+02	5.48E+02	4.31E+00	4.56E-01	0*	2.57E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	8.39E-04	8.39E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.57E+00	1.57E+00	4.94E-04	0*	0*	2.70E-04
Total use of non-renewable primary energy resources	MJ	3.25E+01	3.18E+01	3.70E-01	3.96E-02	0*	2.62E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.91E-01	5.90E-01	4.94E-04	1.56E-04	0*	2.70E-04
Use of renewable primary energy resources used as raw material	MJ	9.79E-01	9.79E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.99E+01	2.92E+01	3.70E-01	3.96E-02	0*	2.62E-01
Use of non renewable primary energy resources used as raw material	MJ	2.58E+00	2.58E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	7.18E+00	6.92E+00	0*	0*	0*	2.55E-01
Non hazardous waste disposed	kg	1.10E+00	1.09E+00	9.32E-04	3.79E-03	0*	1.61E-03
Radioactive waste disposed	kg	5.83E-04	5.81E-04	6.64E-07	1.90E-07	0*	1.43E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.31E-01	1.83E-02	0*	5.03E-02	0*	6.26E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	8.39E-03	0*	0*	0*	0*	8.39E-03
Exported Energy	MJ	1.56E-04	1.47E-05	0*	1.41E-04	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.0, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1811012_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	12/2018	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

ENVPEP1811012\_V1 © 2017 - Schneider Electric – All rights reserved 12/2018