
Product Environmental Profile

Wiser IP camera indoor






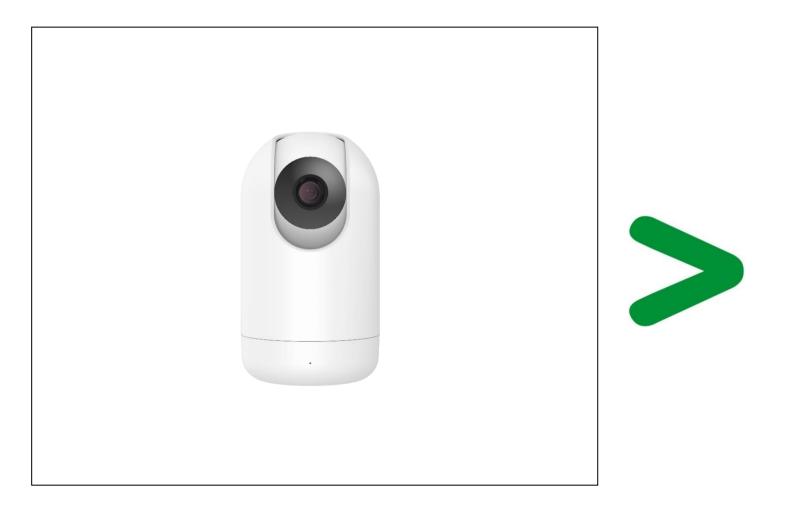

Representative product	Wiser IP camera indoor - CCT723319
Description of the product	Wiser IP camera indoor could control and access from everywhere, interaction with all integrated wiser products possible, monitoring with mobile alarm keep your home & loved ones in safe condition.
Functional unit	The main function of this product is that it can be used to monitor anywhere and have voice conversations with other intelligent products. Power adapter: 5V, 2A Standard: IEC 62443-2 & ISO27001 IP20.

Constituent materials

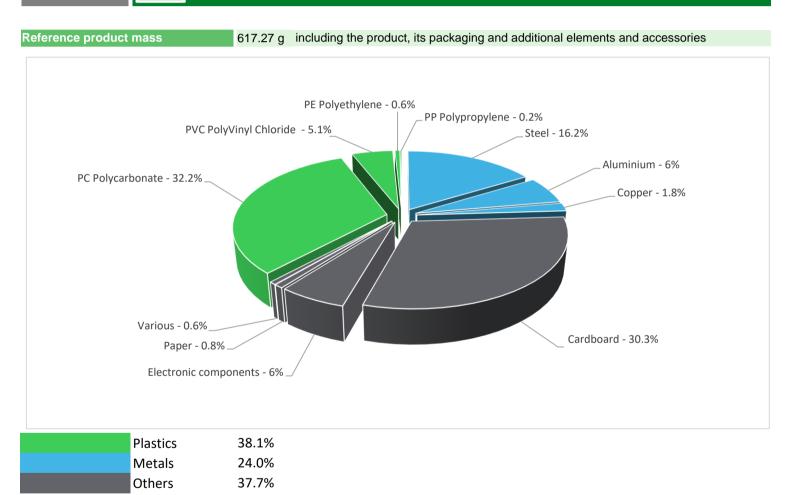

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium, flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), or phthalates (Bis(2-ethylhexyl) phthalate DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

Additional environmental information


The Wiser IP camera indoor presents the following relevent environmental aspects							
Design	Indicate all the eco-design improvements brought to the product at the design phase compared to previous offer range, refer to ecoDesign Way results						
Manufacturing	Manufactured at a production site complying with the regulations						
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
Distribution	Packaging weight is 195.4 g, consisting of cardboard (96.5%), paper (2.4%), PE film (1.1%).						
Installation	Ref CCT723319 does not require any installation operations						
Use	The product does not require special maintenance operations.						
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
	This product contains electronic card (37.62g) that should be separated from the stream of waste so as to optimize end of-life treatment.						
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website						
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page						
	Recyclability potential:44%Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						

D Environmental impacts

Reference life time	10 years						
Product category	Other equipments - Active product						
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.						
Use scenario	The product is in active mode 1% of the time with a power use of 2.75W and in stand-by mode 90% of the time with a power use of 1.5W, in off mode 9% of the time with a power use of 1W, for 10 years.						
Geographical representativeness	Europe						
Technological representativeness	All the technologies pertaining to product manufacturing are represented in manufacturing phase properly.						
	Manufacturing	Installation	Use	End of life			
Energy model used	Energy model used: Hangzhou	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27			

Wiser IP camera indoor - CCT723319						
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
kg Sb eq	4.54E-03	4.53E-03	0*	0*	5.47E-06	0*
$kg SO_2 eq$	2.98E-01	3.50E-02	3.64E-04	4.44E-05	2.63E-01	1.46E-04
kg PO4 ³⁻ eq	2.14E-02	5.41E-03	8.38E-05	1.14E-05	1.59E-02	5.08E-05
$kg CO_2 eq$	7.72E+01	1.40E+01	7.96E-02	1.07E-02	6.30E+01	1.24E-01
kg CFC11 eq	5.81E-06	1.70E-06	0*	0*	4.10E-06	4.62E-09
$kg C_2H_4 eq$	1.72E-02	2.73E-03	2.59E-05	3.32E-06	1.44E-02	1.43E-05
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
m3	2.28E+02	8.81E-02	0*	0*	2.28E+02	0*
MJ	1.43E+03	1.68E+02	1.13E+00	0*	1.26E+03	6.84E-01
	Unit kg Sb eq kg SD2 eq kg PO43 eq kg CO2 eq kg CFC11 eq kg C2H4 eq Unit m3	Unit Total kg Sb eq 4.54E-03 kg SO ₂ eq 2.98E-01 kg PO ₄ ³⁻ eq 2.14E-02 kg CO ₂ eq 7.72E+01 kg CFC11 eq 5.81E-06 kg C ₂ H ₄ eq 1.72E-02 Unit Total m3 2.28E+02	Unit Total Manufacturing kg Sb eq 4.54E-03 4.53E-03 kg SD ₂ eq 2.98E-01 3.50E-02 kg PO ₄ ³⁻ eq 2.14E-02 5.41E-03 kg CO ₂ eq 7.72E+01 1.40E+01 kg CFC11 eq 5.81E-06 1.70E-06 kg C ₂ H ₄ eq 1.72E-02 2.73E-03 Dnit Total Manufacturing m3 2.28E+02 8.81E-02	Unit Total Manufacturing Distribution kg Sb eq 4.54E-03 4.53E-03 0* kg SD ₂ eq 2.98E-01 3.50E-02 3.64E-04 kg PO ₄ ³⁻ eq 2.14E-02 5.41E-03 8.38E-05 kg CO ₂ eq 7.72E+01 1.40E+01 7.96E-02 kg CFC11 eq 5.81E-06 1.70E-06 0* kg C ₂ H ₄ eq 1.72E-02 2.73E-03 2.59E-05 Unit Total Manufacturing Distribution m3 2.28E+02 8.81E-02 0*	UnitTotalManufacturingDistributionInstallationkg Sb eq $4.54E-03$ $4.53E-03$ 0^* 0^* kg SO_2 eq $2.98E-01$ $3.50E-02$ $3.64E-04$ $4.44E-05$ kg PO4 ^{3*} eq $2.14E-02$ $5.41E-03$ $8.38E-05$ $1.14E-05$ kg CO2 eq $7.72E+01$ $1.40E+01$ $7.96E-02$ $1.07E-02$ kg CFC11 eq $5.81E-06$ $1.70E-06$ 0^* 0^* kg C_2H_4 eq $1.72E-02$ $2.73E-03$ $2.59E-05$ $3.32E-06$ UnitTotalManufacturingDistributionInstallationm3 $2.28E+02$ $8.81E-02$ 0^* 0^*	UnitTotalManufacturingDistributionInstallationUsekg Sb eq $4.54E.03$ $4.53E.03$ 0^* 0^* $5.47E.06$ kg SO_2 eq $2.98E.01$ $3.50E.02$ $3.64E.04$ $4.44E.05$ $2.63E.01$ kg PO4 ^{3*} eq $2.14E.02$ $5.41E.03$ $8.38E.05$ $1.14E.05$ $1.59E.02$ kg CO2 eq $7.72E+01$ $1.40E+01$ $7.96E.02$ $1.07E.02$ $6.30E+01$ kg CFC11 eq $5.81E.06$ $1.70E.06$ 0^* 0^* $1.44E.02$ kg C_2H_4 eq $1.72E.02$ $2.73E.03$ $2.59E.05$ $3.32E.06$ $1.44E.02$ unitTotalManufacturingDistributionInstallationUsem3 $2.28E+02$ $8.81E.02$ 0^* 0^* $2.28E+02$

ENVPEP2009012_V1

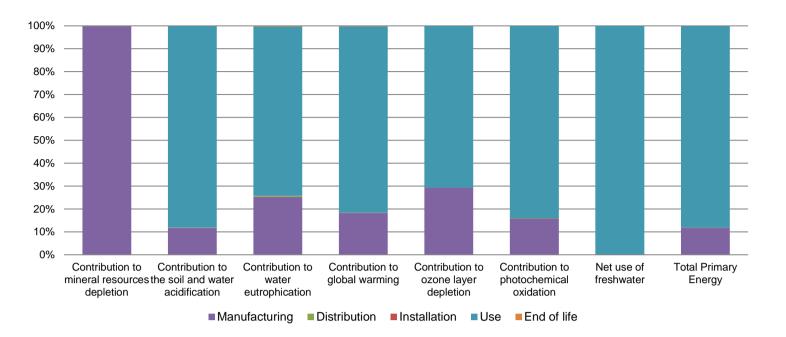

Optional indicators	Wiser IP camera indoor - CCT723319						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	8.36E+02	1.19E+02	1.12E+00	1.38E-01	7.15E+02	5.52E-01
Contribution to air pollution	m³	4.02E+03	1.30E+03	3.39E+00	4.40E-01	2.71E+03	4.97E+00
Contribution to water pollution	m³	4.90E+03	2.28E+03	1.31E+01	1.61E+00	2.60E+03	7.31E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.09E-03	2.09E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.70E+02	9.69E+00	0*	0*	1.60E+02	0*
Total use of non-renewable primary energy resources	MJ	1.26E+03	1.58E+02	1.12E+00	1.39E-01	1.10E+03	6.83E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.66E+02	5.86E+00	0*	0*	1.60E+02	0*
Use of renewable primary energy resources used as raw material	MJ	3.83E+00	3.83E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.25E+03	1.50E+02	1.12E+00	1.39E-01	1.10E+03	6.83E-01
Use of non renewable primary energy resources used as raw material	MJ	8.28E+00	8.28E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.81E+01	1.73E+01	0*	0*	3.28E-02	7.08E-01
Non hazardous waste disposed	kg	2.43E+02	7.88E+00	0*	0*	2.35E+02	0*
Radioactive waste disposed	kg	1.62E-01	5.25E-03	0*	0*	1.57E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4.38E-01	5.85E-02	0*	1.93E-01	0*	1.87E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.65E-02	0*	0*	0*	0*	2.65E-02
Exported Energy	MJ	6.11E-04	5.74E-05	0*	5.54E-04	0*	0*
	•	6.11E-04	5.74E-05	0*	5.54E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

ENVPEP2009012_V1 - Product Environmental Profile - Wiser IP camera indoor

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration numb	ber	ENVPEP2009012_	_V1	Drafting rules	PCR-ed3-EN-2015 04 02	
Date of issue		10/2020		Supplemented by	PSR-0005-ed2-EN-2016 03	3 29
Validity period		5 years		Information and reference documents	www.pep-ecopassport.org	
Independent verifi	cation of	the declaration and da	ata			
Internal	Х	External				
The elements of the	he preser	nt PEP cannot be com	pared with elements	from another program.		
Document in com environmental lab		ith ISO 14021:2016 «	Environmental labels	s and declarations - Self-declared	environmental claims (Type II	
Schneider Electric II	ndustries S	SAS				
Country Customer C http://www.schneide						
35, rue Joseph Mon	ier					
CS 30323						
F- 92506 Rueil Maln	naison Ceo	dex				
RCS Nanterre 954 5 Capital social 896 3						
www.schneider-elec	tric.com		Published by So	chneider Electric		
ENVPEP2009012_V	′1	¢	2019 - Schneider Elec	ctric – All rights reserved		10/2020