# **Product Environmental Profile**


#### **EASY9 Bico- Residual Current Circuit Breaker**





General information								
Reference product	EASY9 Bico- Residual Current Circuit Breaker - EZ9R35463							
Description of the product	The main purpose of the EASY9 RCCB product range is to ensure protection of persons against electric shocks							
Functional unit	Protect during 20 years the installation against overloads and short-circuits and people and premises at risk of fire or explosion against insulation defects in circuit with assigned voltage [U] 415V AC and rated current [In] 63A. This protection is ensured in accordance with the following parameters: - Number of poles Np - 4 - Rated breaking capacity Icn - 630A - Sensitivity : 30mA - Type of differential protection Tp- AC							

## Constituent materials

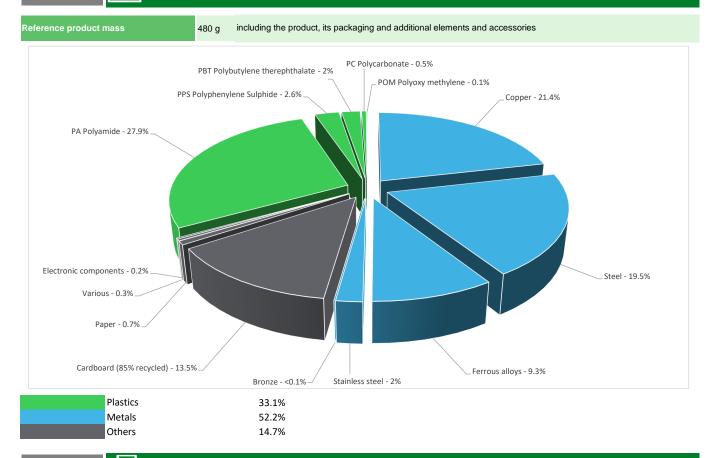

#### Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

60%

### Additional environmental information

End Of Life	Recyclability potential:
-------------	--------------------------

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

## *P* Environmental impacts

Reference service life time	20 years						
Product category	Differential circuit breaker						
Installation elements	The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).						
Use scenario	Load rate: 50% of 63A (In) Use time rate: 30% of the time over 20 years (RLT)						
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.						
Geographical representativeness	India						
	[A1 - A3]	[A5]	[B6]	[C1 - C4]			
Energy model used	Electricity Mix; Production mix; Low voltage; IN	Electricity Mix; Production mix; Low voltage; IN	Electricity Mix; Production mix; Low voltage; IN	Electricity Mix; Production mix; Low voltage; IN			

Mandatory Indicators			EASYS	) Bico- Residual	Current Circuit E	Breaker - EZ9R3	5463	
Impact indicators	Unit	Total	Manufacturing [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Benefits [D]
Contribution to climate change	kg CO2 eq	3.71E+02	3.45E+00	5.59E-01	1.24E-01	3.65E+02	1.05E+00	-2.51E+00
Contribution to climate change-fossil	kg CO2 eq	3.70E+02	3.37E+00	5.59E-01	1.19E-01	3.65E+02	1.03E+00	-2.44E+00
Contribution to climate change-biogenic	kg CO2 eq	1.45E-01	8.32E-02	0*	5.51E-03	3.56E-02	2.10E-02	-7.31E-02
Contribution to climate change-land use and land use change	ge kg CO2 eq	3.62E-07	1.25E-08	0*	0*	0*	3.49E-07	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	3.07E-06	4.51E-07	4.58E-07	8.21E-09	2.14E-06	1.42E-08	-5.03E-07
Contribution to acidification	mol H+ eq	2.84E+00	3.63E-02	2.51E-03	4.92E-04	2.79E+00	4.35E-03	-6.69E-02
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	8.69E-04	9.16E-05	0*	8.96E-07	3.25E-05	7.44E-04	-4.84E-06
Contribution to eutrophication marine	kg N eq	3.02E-01	3.24E-03	1.16E-03	1.30E-04	2.96E-01	7.37E-04	-1.90E-03
Contribution to eutrophication, terrestrial	mol N eq	3.47E+00	3.39E-02	1.26E-02	9.84E-04	3.41E+00	8.50E-03	-2.17E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.01E+00	1.17E-02	4.02E-03	2.63E-04	9.89E-01	2.34E-03	-1.05E-02
Contribution to resource use, minerals and metals	kg Sb eq	4.71E-04	4.32E-04	0*	0*	1.82E-05	2.10E-05	-9.21E-04
Contribution to resource use, fossils	MJ	5.84E+03	4.46E+01	6.85E+00	1.29E+00	5.75E+03	3.31E+01	-4.84E+01
Contribution to water use	m3 eq	1.87E+01	8.26E-01	2.65E-02	5.30E-02	1.65E+01	1.33E+00	-3.42E+00

Additional indicators for the French regulation are available as well

Inventory flows Indicators			EASY9 Bico- Residual Current Circuit Breaker - EZ9R35463					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
	Onic		[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.22E+02	1.08E+00	0*	9.27E-02	3.20E+02	5.07E-01	-1.18E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	2.50E-01	2.50E-01	0*	0*	0*	0*	-8.46E-01
Contribution to total use of renewable primary energy resources	MJ	3.22E+02	1.33E+00	0*	9.27E-02	3.20E+02	5.07E-01	-2.03E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.83E+03	4.09E+01	6.85E+00	1.29E+00	5.75E+03	3.31E+01	-4.84E+01

Contribution to use of non renewable primary energy resources used as raw material	MJ	3.70E+00	3.69E+00	0*	0*	3.30E-03	0*	2.53E-03
Contribution to total use of non-renewable primary energy resources	MJ	5.84E+03	4.46E+01	6.85E+00	1.29E+00	5.75E+03	3.31E+01	-4.84E+01
Contribution to use of secondary material	kg	6.11E-02	6.11E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	M3	4.38E-01	1.92E-02	6.16E-04	1.23E-03	3.84E-01	3.26E-02	-7.97E-02
Contribution to hazardous waste disposed	kg	3.97E+01	2.64E+01	0*	0*	1.28E+01	4.20E-01	-7.83E+01
Contribution to non hazardous waste disposed	kg	6.88E+01	4.76E+00	0*	4.04E-01	6.34E+01	1.49E-01	-2.48E+00
Contribution to radioactive waste disposed	kg	3.21E-03	7.49E-04	1.04E-04	5.42E-05	2.30E-03	7.55E-06	-6.66E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	7.50E-01	4.36E-01	0*	6.82E-02	0*	2.46E-01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version 5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2212025_V2	Drafting rules	PEP-PCR-ed4-2021 09 06					
Validity period	5 years	Supplemented by	PSR-0005-ed2-2016 03 29					
Date of issue	06/2023	Information and reference documents	www.pep-ecopassport.org					
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016								
Internal X External								
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)								
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019								
The elements of the present PEP cannot be compared with elements from another program.								
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »								

Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

ENVPEP2212025\_V2

Published by Schneider Electric

©2023 - Schneider Electric - All rights reserved