
Product Environmental Profile

Coil MX 200/250 VCA/VCC for Fixed Breaker





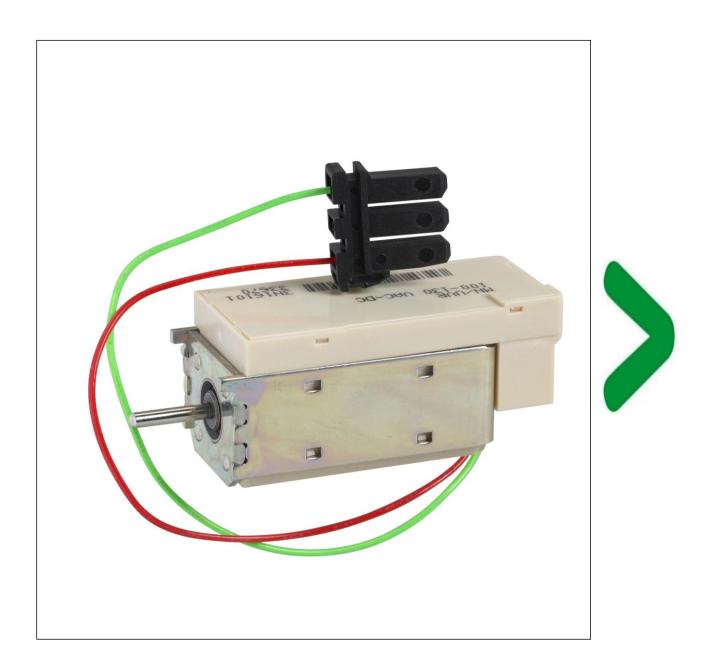


General information

Reference product	Coil MX 200/250 VCA/VCC for Fixed Breaker - 33662
Description of the product	The MX shunt trip is an auxiliary device used as Voltage release for emergency off or remote opening applications. The MX release instantaneously opens the circuit breaker when its supply voltage drops to a value between 70% and 110% of its rated voltage.
Functional unit	The MX release instantaneously opens the circuit breaker when energized, the minimum duration of the pulse operating order must be 200 ms. Service Duration: 10 years. It complies with IEC 60947-2 standard.

Constituent materials

Reference product mass 161 g including the product, its packaging and additional elements and accessories

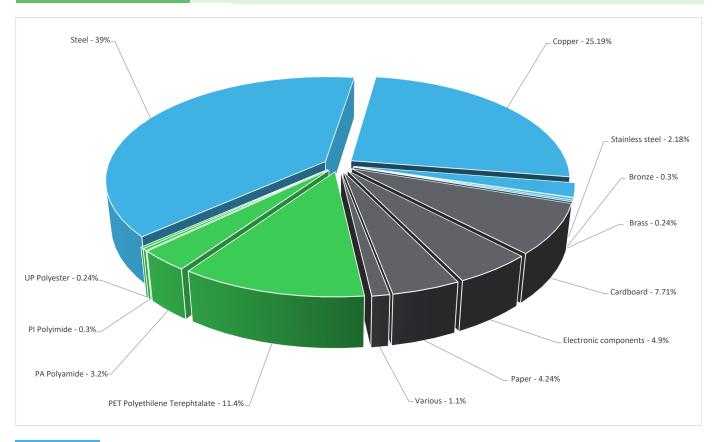

Metals 66.9%
Others 18.0%
Plastics 15.1%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

Additional environmental information

End Of Life

Recyclability potential:

74%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Polymental impacts

Reference service life time	10 years							
Product category	Other equipments - Active product							
Installation elements	No special components needed during the installation phase. The disposal of the packaging material is accounted during this phase (Including transport to disposal).							
Use scenario	As per PSR the product is in active mode 0.000022% and in off mode 99.999978% of the time with a power use of 4.5W for 10 years							
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.							
Geographical representativeness	Europe							
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]				
	Electricity Mix; Production mix; Low voltage; FR	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27				

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators			(Coil MX 200/250 V	CA/VCC for Fixe	d Breaker - 3366	62	
Impact indicators	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
		i Ottai	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	3.26E+00	2.90E+00	2.11E-02	3.59E-02	0*	2.95E-01	-3.66E-01
Contribution to climate change-fossil	kg CO2 eq	3.23E+00	2.89E+00	2.11E-02	3.43E-02	0*	2.86E-01	-3.62E-01
Contribution to climate change-biogenic	kg CO2 eq	2.68E-02	1.60E-02	0*	1.60E-03	0*	9.23E-03	-3.86E-03
Contribution to climate change-land use and land use change	kg CO2 eq	1.47E-07	6.15E-09	0*	0*	0*	1.41E-07	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	3.86E-07	3.77E-07	0*	2.38E-09	0*	6.36E-09	-6.59E-08
Contribution to acidification	mol H+ eq	2.87E-02	2.62E-02	1.35E-04	1.42E-04	0*	2.17E-03	-8.45E-03
Contribution to eutrophication, freshwater	kg (PO4)³¯ eq	3.09E-04	7.28E-06	0*	2.59E-07	0*	3.01E-04	-6.79E-07
Contribution to eutrophication marine	kg N eq	2.85E-03	2.18E-03	6.36E-05	3.77E-05	0*	5.69E-04	-2.69E-04
Contribution to eutrophication, terrestrial	mol N eq	2.80E-02	2.35E-02	6.98E-04	2.85E-04	0*	3.54E-03	-3.06E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	9.55E-03	8.28E-03	1.76E-04	7.61E-05	0*	1.02E-03	-1.40E-03
Contribution to resource use, minerals and metals	kg Sb eq	3.72E-04	3.63E-04	0*	0*	0*	8.47E-06	-1.37E-04
Contribution to resource use, fossils	MJ	5.48E+01	3.89E+01	2.93E-01	3.74E-01	0*	1.53E+01	-7.47E+00
Contribution to water use	m3 eq	6.66E+00	1.32E+00	0*	1.53E-02	0*	5.33E+00	-4.35E-01

Additional indicators for the French regulation are available as well

Inventory flows Indicators			(Coil MX 200/250 V	CA/VCC for Fixed	d Breaker - 3366	52	
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.53E+00	1.28E+00	3.91E-04	2.68E-02	1.74E-04	2.25E-01	-9.85E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	7.59E-02	7.59E-02	0*	0*	0*	0*	-8.27E-02
Contribution to total use of renewable primary energy resources	MJ	1.61E+00	1.35E+00	3.91E-04	2.68E-02	1.74E-04	2.25E-01	-1.81E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.42E+01	3.82E+01	2.93E-01	3.74E-01	0*	1.53E+01	-7.47E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	6.59E-01	6.59E-01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	5.48E+01	3.89E+01	2.93E-01	3.74E-01	0*	1.53E+01	-7.47E+00
Contribution to use of secondary material	kg	1.76E-02	1.76E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.70E-01	3.08E-02	0*	3.57E-04	0*	1.39E-01	-1.01E-02
Contribution to hazardous waste disposed	kg	1.78E+01	1.77E+01	0*	0*	0*	1.49E-01	-1.15E+01
Contribution to non hazardous waste disposed	kg	1.29E+00	1.16E+00	7.38E-04	1.17E-01	0*	6.38E-03	-4.99E-01
Contribution to radioactive waste disposed	kg	4.88E-04	4.70E-04	5.26E-07	1.57E-05	0*	1.18E-06	-1.16E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.28E-01	2.15E-04	0*	1.97E-02	0*	1.08E-01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

For all the impact indicators, the manufacturing stage is the greatest contributor throughout the product reference service lifetime except the Climate change-Land use and land use change (GWPlu), Eutrophication, freshwater(Epf) & Water use stages (PEF-WU). The End Of Life stage is the main contributor on Climate change-Land use and land use change(GWPlu), Eutrophication, freshwater stage(Epf) & Water use stages (PEF-WU) Stages.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01040-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06				
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-2016 03 29				
Date of issue	112/2023	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010							
Internal External X							
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)							
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019							
The elements of the present PEP cannot be compared with elements from another program.							
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »							

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com

SCHN-01040-V01.01-EN

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

12/2023