

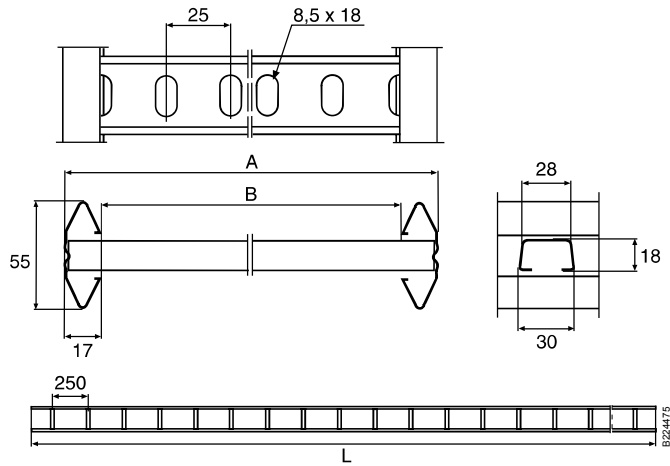


KHZSP/ KHZSPZ+

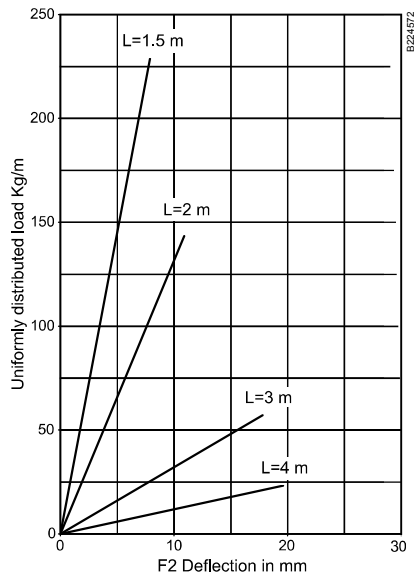

Test model II

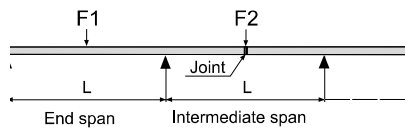

Type	L m	A mm	B mm
KHZSP 200	3, 4, 6	198	164
KHZSP 300	3, 4, 6	298	264
KHZSP 400	3, 4, 6	398	364
KHZSP 500	3, 4, 6	498	464
KHZSP 600	3, 4, 6	598	564
KHZSPZ+ 200	6	198	164
KHZSPZ+ 300	6	298	264
KHZSPZ+ 400	6	398	364
KHZSPZ+ 500	6	498	464
KHZSPZ+ 600	6	598	564

Loadings

The ladders are tested according to IEC 61537, test model II - a joint in the intermediate span (F2).

Guaranteed load

Guaranteed uniformly distributed load includes a minimum safety factor of 1.7 towards rupture. The diagram shows the deflection with Joint 21 for all ladder widths.

The cable ladders must not be used as walkways.