
Product Environmental Profile

Exxact steel frames



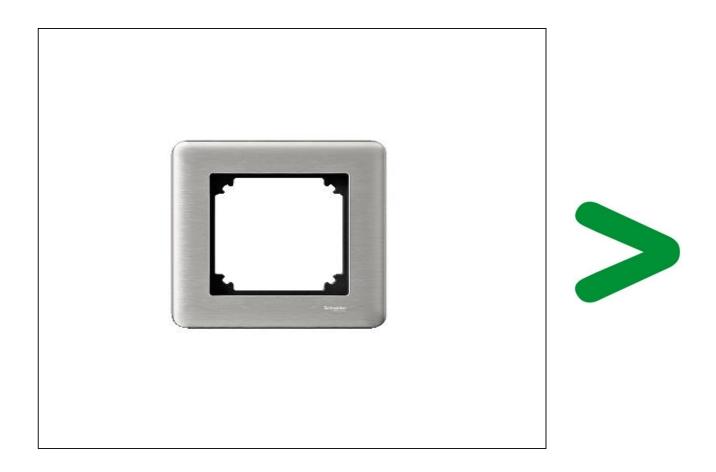

General information

Representative product

Exxact steel frames - WDE004351

Description of the product

The main function of the Exxact frames is to be used together with any Exxact function like switch, socket-outlet, SAE, VDI etc for mounting in fl ush wall boxes or in surface boxes.


Functional unit

The main function of the Exxact frames is to be used together with any Exxact function like switch, socket-outlet, SAE, VDI etc for mounting in flush wall boxes or in surface boxes to protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure or a cabinet having the following dimensions 87 x 87 x 11.6mm.

Constituent materials

Reference product mass

93.4 g including the product, its packaging and additional elements and accessories

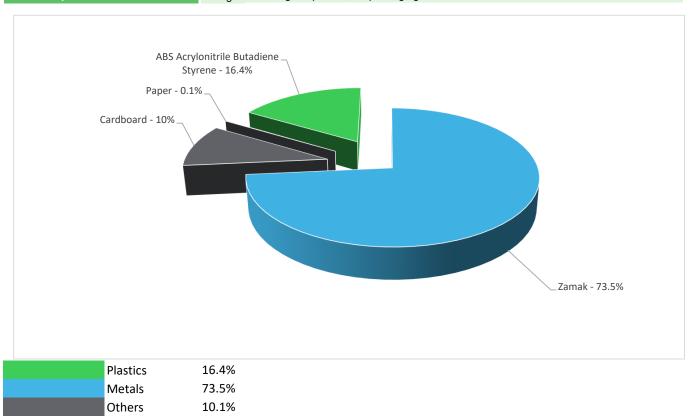

E | Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

| The Exxact steel frames presents the following relevent environmental aspects | | | | | | | |
|---|---|--|--|--|--|--|--|
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified | | | | | | |
| Distribution | Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 9.4 g, consisting of Cardboard (98.94%), Paper (1.06%) Product distribution optimised by setting up local distribution centres | | | | | | |
| Installation | This product does not require any installation operations. | | | | | | |
| Use | The product does not require special maintenance operations. | | | | | | |
| End of life | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 71% (version V1.20 Sep. 2008 presented to the French Agency for Environment | | | | | | |
| | Recyclability potential: 71% (version V1, 20 Sep. 2008 presented to the French Agency for Environme and Energy Management: ADEME). | | | | | | |

Environmental impacts

| Reference life time | 20 years | | | | | | |
|------------------------------------|--|--|--|--|--|--|--|
| Product category | Unequipped enclosures and cabinets | | | | | | |
| Installation elements | This product does not requrie any special componets during installation | | | | | | |
| Use scenario | Non applicable for unequipped enclosures and cabinets | | | | | | |
| Geographical representativeness | Sweden | | | | | | |
| Technological representativeness | The main function of the Exxact frames is to be used together with any Exxact function like switch, socket- outlet, SAE, VDI etc for mounting in fl ush wall boxes or in surface boxes. | | | | | | |
| | Manufacturing | Installation | Use | End of life | | | |
| Energy model used | Energy model used: Ringsted, Denmark | Electricity grid mix; AC; consumption mix, at consumer; 230V; SE | Electricity grid mix; AC; consumption mix, at consumer; 230V; SE | Electricity grid mix; AC; consumption mix, at consumer; 230V; SE | | | |

| Compulsory indicators Exxact steel frames - WDE004351 | | | | | | | |
|---|-------------------------------------|----------|---------------|--------------|--------------|-----|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 4.13E-05 | 4.13E-05 | 0* | 0* | 0* | 0* |
| Contribution to the soil and water acidification | kg SO ₂ eq | 1.39E-03 | 1.16E-03 | 2.09E-04 | 6.47E-07 | 0* | 2.44E-05 |
| Contribution to water eutrophication | kg PO ₄ ³⁻ eq | 3.65E-04 | 2.79E-04 | 5.51E-05 | 2.50E-05 | 0* | 5.83E-06 |
| Contribution to global warming | kg CO ₂ eq | 6.70E-01 | 6.16E-01 | 3.30E-02 | 1.29E-02 | 0* | 8.30E-03 |
| Contribution to ozone layer depletion | kg CFC11 eq | 1.28E-07 | 1.28E-07 | 6.70E-11 | 3.23E-11 | 0* | 5.38E-10 |
| Contribution to photochemical oxidation | kg C₂H₄ eq | 9.64E-05 | 8.62E-05 | 4.46E-06 | 3.10E-06 | 0* | 2.61E-06 |

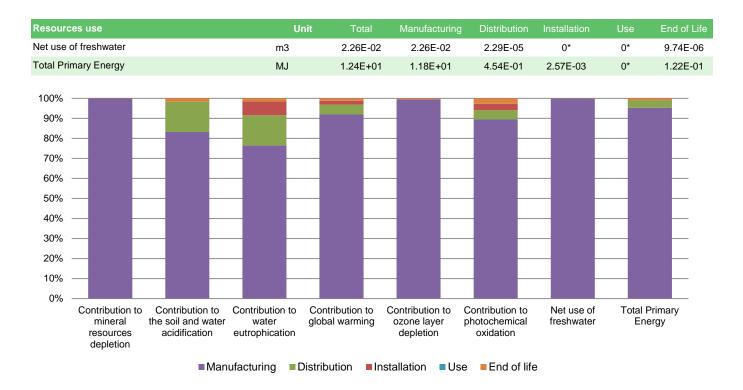

| Optional indicators | | Exxact steel frames - WDE004351 | | | | | |
|---|------|---------------------------------|---------------|--------------|--------------|-----|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 1.02E+01 | 9.60E+00 | 4.76E-01 | 2.30E-03 | 0* | 1.11E-01 |
| Contribution to air pollution | m³ | 4.54E+02 | 4.50E+02 | 3.62E+00 | 4.59E-02 | 0* | 8.64E-01 |
| Contribution to water pollution | m³ | 5.81E+01 | 5.64E+01 | 0* | 6.93E-01 | 0* | 9.34E-01 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 4.58E-06 | 4.58E-06 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 2.73E-01 | 2.72E-01 | 0* | 0* | 0* | 1.36E-04 |
| Total use of non-renewable primary energy resources | MJ | 1.21E+01 | 1.16E+01 | 4.54E-01 | 2.57E-03 | 0* | 1.22E-01 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 7.90E-02 | 7.89E-02 | 0* | 0* | 0* | 1.36E-04 |
| Use of renewable primary energy resources used as raw material | MJ | 1.94E-01 | 1.94E-01 | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 1.14E+01 | 1.09E+01 | 4.54E-01 | 2.57E-03 | 0* | 1.22E-01 |
| Use of non renewable primary energy resources used as raw material | MJ | 7.13E-01 | 7.13E-01 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Hazardous waste disposed | kg | 1.52E-01 | 4.36E-02 | 0* | 0* | 0* | 1.09E-01 |
| Non hazardous waste disposed | kg | 1.04E-01 | 9.41E-02 | 0* | 9.42E-03 | 0* | 3.75E-04 |
| Radioactive waste disposed | kg | 7.92E-05 | 7.86E-05 | 0* | 1.97E-08 | 0* | 5.84E-07 |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 6.92E-02 | 9.97E-03 | 0* | 0* | 0* | 5.92E-02 |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 1.75E-04 | 2.22E-05 | 0* | 0* | 0* | 1.53E-04 |
| Exported Energy | MJ | 5.73E-05 | 0* | 0* | 5.73E-05 | 0* | 0* |

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.7.0.3, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| Registration number | ENVPEP1805007_V1 | Drafting rules | PCR-ed3-EN-2015 04 02 |
|---------------------|------------------|-------------------------------------|----------------------------|
| Date of issue | 06/2018 | Supplemented by | PSR-0005-ed2-EN-2016 03 29 |
| Validity period | 5 years | Information and reference documents | www.pep-ecopassport.org |

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1805007_V1

© 2017 - Schneider Electric - All rights reserved

06/2018