


Interpact INS250 Interpact INV100 to INV250

Product Environmental Profile

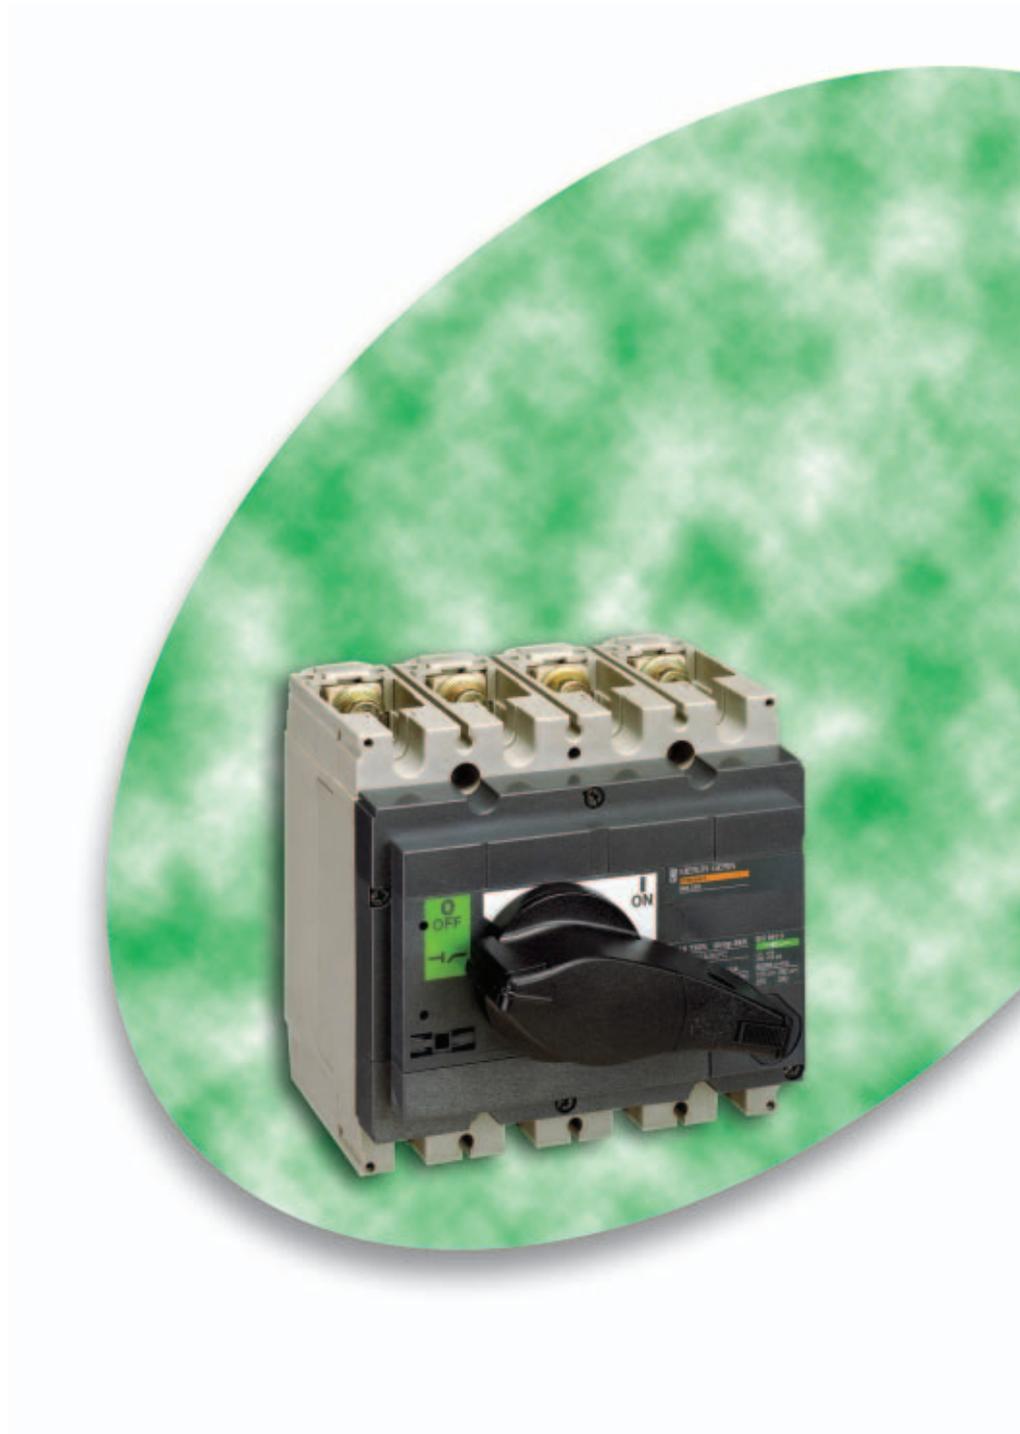

Product Environmental Profile - PEP

Product overview

The Interpact INS250, INV100 to INV250 range of switch-disconnectors is designed to control and isolate low-voltage electrical circuits rated 100 A to 250 A.

The Product Environmental Profile (PEP) covers the entire range:

- Interpact three-pole or four-pole switch-disconnectors and emergency stop switches rated 100 A to 250 A
- switches with positive break indication (INS) and visible isolation (INV).

The representative product used for the analysis was the Interpact INS250 four-pole (4P) switch-disconnector.

The environmental impacts of this referenced product are representative of the impacts of the other products in the range for which the same technology is used.

The environmental analysis was performed in conformity with ISO 14040 "Environmental management: Life cycle assessment – Principle and framework".


This analysis takes the stages in the life cycle of the product into account.

Constituent materials

The design and size of the products in this range are identical.

The mass of the Interpact INS250 4P switch-disconnector is 2324 g, not including the packaging.

The constituent materials are distributed as follows:

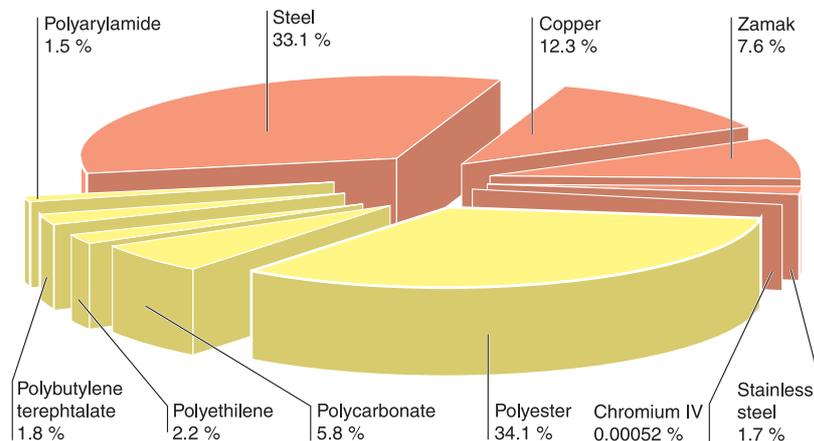

All necessary steps have been taken with our services, suppliers and subcontractors to ensure that the materials used in the composition of the Interpact INS250, INV100 to INV250 product range do not contain any substances prohibited by the legislation that was in force ⁽¹⁾ when it was put on the market.

(1) According to the list available on request.

Manufacturing

The products in the Interpact INS250, INV100 to INV250 range are manufactured at Schneider Electric production sites which have established an ISO 14001 certified environmental management system.

Distribution

The packaging conforms to the European Union packaging directive. The packaging was designed to optimise both its weight and volume.

The weight of the packaging of the Interpact INS250 4P switch-disconnector is 136 g.

The packaging consists of a cardboard box (125 g). The weight includes the instructions for the device (11 g).

The product distribution flows have been optimised by setting up local distribution centres close to the market areas.

Product Environmental Profile - PEP

Utilization

The products in the Interpact INS250, INV100 to INV250 range do not generate any environmental pollution requiring special precautionary measures (noise, emissions, etc.).

The dissipated power (loss of wattage due to the Joule effect) depends on the conditions under which the product is implemented and used. For the products in the Interpact INS250, INV100 to INV250 range, this dissipated power is between 4.5 W for the INV100 A 3P switch-disconnector and 38 W for the Interpact INS/INV250 A 4P switch-disconnector.

The heat dissipation accounts for less than 0.01 % of the power passing through the product.

The annual power consumption of an Interpact INS250 4P switch-disconnector is 133.2 kWh, assuming that it is operating at 80 % of the load for 14 hours and 20 % of the load for 10 hours.

End of life

At end of life, the products in the Interpact INS250, INV100 to INV250 range can either be dismantled or crushed to facilitate the recovery of the various constituent materials.

The potential for recycling products in the INS250, INV100 to INV250 range is greater than 75 %.

This percentage includes ferrous and non-ferrous materials, as well as marked plastics that do not contain halogenated flame retardants.

The remaining 25 % of the total product materials are recovered as energy.

The Interpact INS250, INV100 to INV250 range does not require any special recycling treatment.

Environmental impacts



The EIME (Environmental Impact and Management Explorer) software, version 1.6, and its database, version 5.4, were used for the Life Cycle Assessment (LCA).

The assumed service life of the product is 20 years and the European electrical power model is used.

The life cycle assessment relates to the Interpact INS250 4P switch-disconnector.

This analysis takes the product consumptions and emissions into account in the life cycle phases: Manufacturing "M" including the processing of raw materials, Distribution "D" and Utilisation "U".

Presentation of product environmental impacts

Data calculated for product utilisation of 20 years.

Environmental indicators	Unit	For an Interpact INS250 4P			
		S = M + D + U	M	D	U
Raw Material Depletion	Y-1	6.63 10 ⁻¹⁴	4.15 10 ⁻¹⁴	2.26 10 ⁻¹⁷	2.47 10 ⁻¹⁴
Energy consumption	MJ	2.79 10 ⁴	1.53 10 ²	17.2	2.77 10 ⁴
Water Depletion	dm ³	3.71 10 ³	96.6	3.22 10 ⁻¹	3.61 10 ³
Global Warming	g=CO ₂	1.75 10 ⁶	8.06 10 ³	1.30 10 ³	1.74 10 ⁶
Ozone Depletion	g=CFC-11	2.17 10 ⁻¹	1.67 10 ⁻³	1.51 10 ⁻⁴	2.15 10 ⁻¹
Photochemical Ozone Creation	g=C ₂ H ₄	6.16 10 ²	2.54	1.17	6.13 10 ²
Air Acidification	g=H ⁺	2.98 10 ²	2.43	2.41 10 ⁻¹	2.95 10 ²
Hazardous Waste Production	kg	25.0	5.33 10 ⁻²	8.67 10 ⁻⁵	24.9

The utilisation phase (phase U) has the greatest impact on all the life cycle phases of the product. It corresponds to the impacts associated with electricity production during this phase.

Schneider Electric takes all the necessary measures required to optimise this parameter.

Product Environmental Profile - PEP

System approach

The environmental impact data given above is only valid within the specified context and cannot be used directly in the environmental report on the installation.

Glossary

Raw Material Depletion (RMD)

This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.

Energy Depletion (ED)

This indicator gives the quantity of energy consumed, whether it be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.

Water Depletion (WD)

This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm³.

Global Warming Potential (GWP)

The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO₂.

Ozone Depletion (OD)

This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.

Photochemical Ozone Creation (POC)

This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of methane (C₂H₄).

Air Acidification (AA)

The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H⁺.

Hazardous Waste Production (HWP)

This indicator calculates the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.



We are committed to safeguarding our planet by "Combining innovation and continuous improvement to meet the new environmental challenges".

Schneider Electric Industries SAS

89, boulevard Franklin Roosevelt
F - 92500 Rueil-Malmaison (France)
Tel : +33 (0)1 41 29 85 00

<http://www.schneider-electric.com>

This document is based on ISO 14020 which relates to the general principles of environmental declarations and the ISO TR 14025 technical report relating to type III environmental declarations. It was produced according to the instructions in the PEP drafting guide, version 4.

Published by: Schneider Electric
Produced by: Ameg
Printed by: