


Product Environmental Profile

MiCOM H1xx

PCI board Ethernet switches

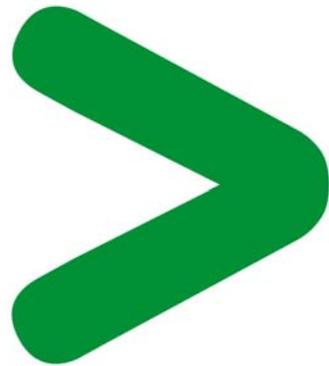

Product Environmental Profile - PEP

Product overview

The main purpose of the MiCOM H1xx switches is to provide Ethernet communications capabilities that meet the constraints of electrical plants: environmental, power supply redundancy, fast recovery from network faults...

This range consists of:

- MiCOM H152: Industrial Redundant Ethernet for Ring networks (Multimode)
- MiCOM H162: Industrial Redundant Ethernet for Star networks (Multimode)
- MiCOM H172: RSTP Industrial Redundant Ethernet for Star networks (Multimode)
- MiCOM H174: RSTP Industrial Redundant Ethernet for Star networks (Single mode)

The representative product used for the analysis is the H152.


The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

The environmental analysis was performed in conformity with ISO 14040.

Constituent materials

The mass of the product range is 660g, including connection kits and packaging.

The constituent materials are distributed as follows:

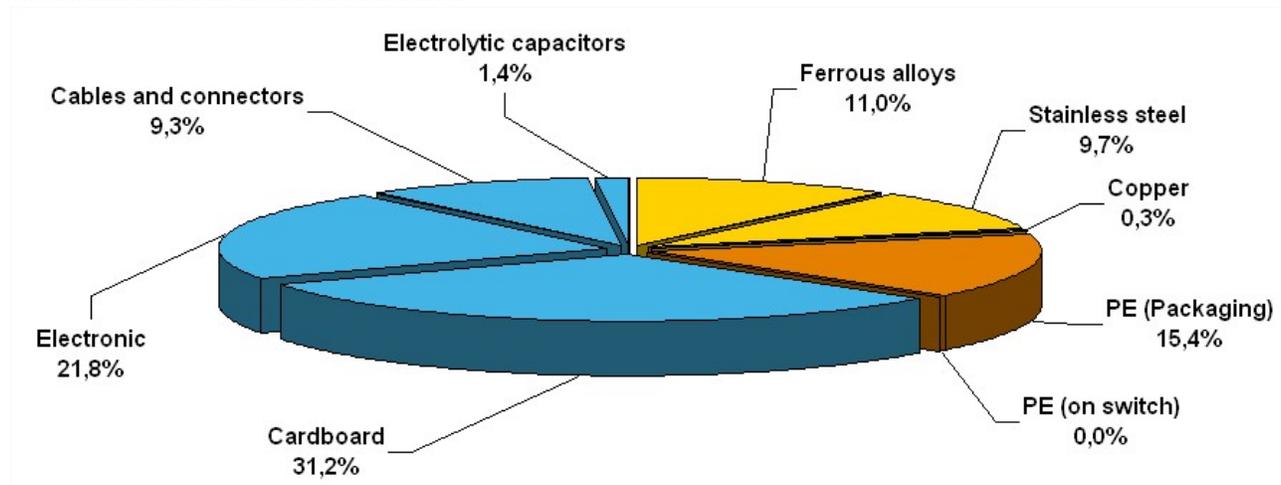

Substance assessment

This product contains: lead (0.02%). This percentage is relative to the total mass of the product, not including packaging.

Manufacturing

MiCOM H are manufactured at a production site on which an ISO14001 certified environmental management system has been established.

Distribution

The weight and volume of the packaging have been optimized, based on the European Union's packaging directive.

The MiCOM H1xx packaging weight is 330 g. It consists of Cardboard and bubble wrap.

Use

The products of the MiCOM range do not generate environmental pollution (noise, emissions) requiring special precautionary measures in standard use.

The electrical power consumption depends on the conditions under which the product is implemented and used. The electrical power consumed by the MiCOM H range is between 4 and 6 W. It's considered that it always runs at its nominal consumption of 4.7 W (which corresponds to an average consumption on the communications ports, plus two watchdogs on)

Product Environmental Profile - PEP

End of life

At end of life, the products in the MiCOM H1xx range have been optimized to decrease the amount of waste and allow recovery of the product components and materials.

Products in this range are leaded PCB assemblies that should be separated from the stream of standard waste from the rest of the computer dismantled, so as to optimize end-of-life treatment by special treatments.

The recyclability potential of the products has been evaluated using the "ECO-DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio is: 20%.

As described in the recyclability calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

Environmental impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I) Use (U), and End of life (E).

Modelling hypothesis and method:

- the calculation was performed on the MiCOM H152
- product packaging: is included
- installation components: no special components included.
- scenario for the Use phase: this product range is included in the category energy consuming products. A MiCOM H152 is designed for a 20 years service-life, and is considered to run 100% of the time at it's nominal consumption of 4.7W.

The electrical power model used for calculation is the European model.

End of life impacts are based on a worst case transport distance to the recycling plant (1000km)

Presentation of the product environmental impacts

Environmental indicators	Unit	MiCOM H152				
		S=M+D+U+E	M	D	U	E
Raw Material Depletion	Y-1	1,39E-13	1,28E-13	4,47E-18	1,07E-14	1,34E-18
Energy Depletion	MJ	9,68E+03	2,49E+02	3,28E+00	9,43E+03	9,82E-01
Water depletion	dm ³	1,56E+03	2,01E+02	3,11E-01	1,36E+03	9,32E-02
Global Warming	g≈CO ₂	4,91E+05	1,51E+04	2,59E+02	4,76E+05	7,78E+01
Ozone Depletion	g≈CFC-11	3,25E-02	6,38E-03	1,83E-04	2,58E-02	5,50E-05
Air Toxicity	m ³	8,25E+07	3,47E+06	4,89E+04	7,89E+07	1,47E+04
Photochemical Ozone Creation	g≈C ₂ H ₄	1,70E+02	9,09E+00	2,22E-01	1,61E+02	6,65E-02
Air acidification	g≈H ⁺	6,67E+01	2,45E+00	3,31E-02	6,42E+01	9,91E-03
Water Toxicity	dm ³	1,38E+05	2,51E+03	3,24E+01	1,36E+05	9,72E+00
Water Eutrophication	g≈PO ₄	2,66E+00	1,54E+00	4,31E-03	1,12E+00	1,29E-03
Hazardous waste production	kg	8,26E+00	3,64E-01	9,65E-05	7,89E+00	2,89E-05

Life cycle assessment has been performed with the EIME software (Environmental Impact and Management Explorer), version 4, and with its database version 11.

The Use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators.

Glossary

Raw Material Depletion (RMD)	This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.
Energy Depletion (ED)	This indicator gives the quantity of energy consumed, whether it be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.
Water Depletion (WD)	This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm ³ .
Global Warming (GW)	The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO ₂ .
Ozone Depletion (OD)	This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.
Air Toxicity (AT)	This indicator represents the air toxicity in a human environment. It takes into account the usually accepted concentrations for several gases in the air and the quantity of gas released over the life cycle. The indication given corresponds to the air volume needed to dilute these gases down to acceptable concentrations.
Photochemical Ozone Creation (POC)	This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C ₂ H ₄).
Air Acidification (AA)	The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H ⁺ .
Water Toxicity (WT)	This indicator represents the water toxicity. It takes into account the usually accepted concentrations for several substances in water and the quantity of substances released over the life cycle. The indication given corresponds to the water volume needed to dilute these substances down to acceptable concentrations.
Hazardous Waste Production (HWP)	This indicator calculates the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.

PEP in compliance with Schneider-Electric TT01 V5.1 and TT02 V15 procedures

PEP established according to PCR PEPecopassport PEP- PCR-ed 2-EN-2011 12 09

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

Published by: Schneider Electric