

# Product Environmental Profile

## EASERGY CL110






## General information




<b>Representative product</b>	EASERGY CL110 -EMS59443
<b>Description of the product</b>	The Easergy CL110 is a battery powered thermal and humidity sensors fitted with wireless communication sensor using Zigbee Greenpower 2.4GHz protocol according to the IEEE 802.15.4. The Easergy CL110 is a mobile device as defined by FCC.
<b>Functional unit</b>	To transmit measured temperature, humidity, battery voltage each 120s during 15 years up to 100 m as air free distance. Consumption when device is in sleeping mode 1,5 to 2 microA. Maximum current during radio transmission 20mA peak equivalent with 10mA during 10ms.



## Constituent materials
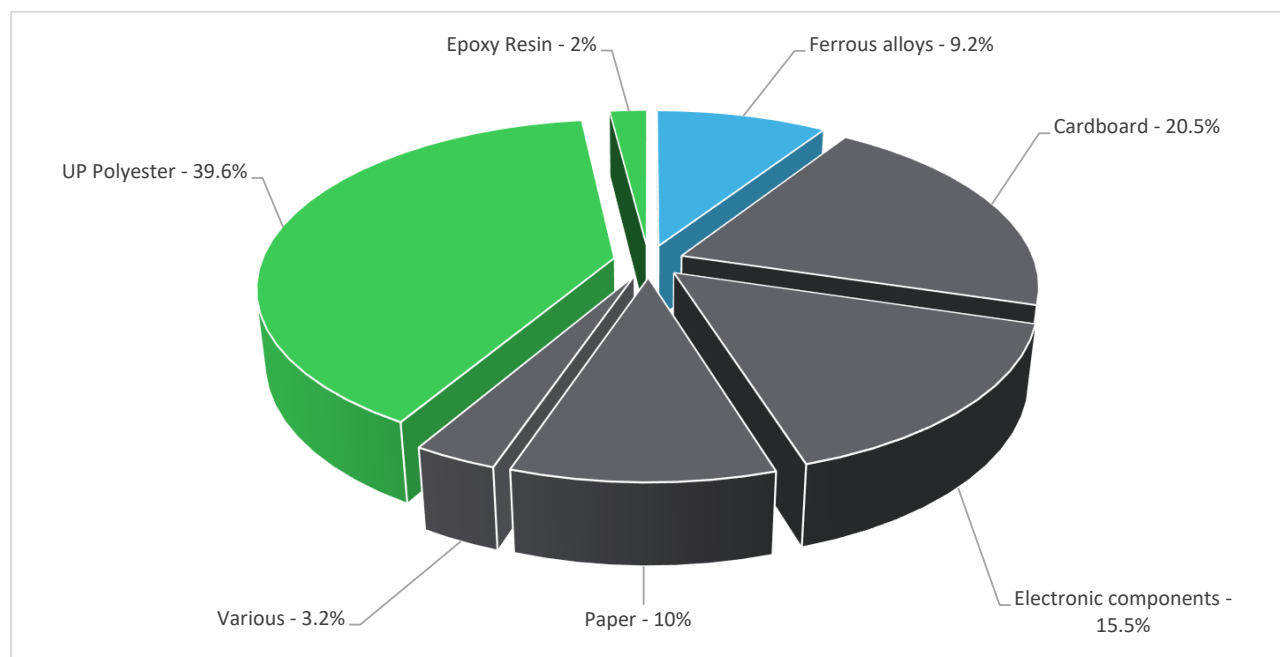
<b>Reference product mass</b>	150 g including the product, its packaging and additional elements and accessories
-------------------------------	--



	Plastics	41.6%
	Metals	9.2%
	Others	49.2%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website  
<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The EASERGY CL110 presents the following relevant environmental aspects


<b>Design</b>	The product has been designed to be sustainable as well by its low consumption of its communication protocol (Zigbee Green Power) and battery embedded.
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 32.3 g, consisting of Paper (36%), Cardboard (62,8%), PE film (1,2%). Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
<b>Use</b>	1 battery of 8 g to be changed every 15 years
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains NTC Probe thermal sensor (0.39g), Light guide/PU (0.07g), Magnet/Sm Co Ni coated (0.9g*4), Membrane/PTFE (0.05g*2), Top housing (7g), Bottom housing (8.4g) to be dismantled and Gasket housing/Silicon (0.9g), Lithium battery (16g), PCBA (8.15g), Gasket cover/Silicon (0.25g) to be depolluted, that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website</p> <p><a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a></p> <p>Recyclability potential: <b>19%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Passive products - non-continuous operation			
<b>Installation elements</b>	EMS59443 does not require any installation operations.			
<b>Use scenario</b>	Product dissipation is 0.015 W full load, loading rate is 30% and service uptime percentage is 30%			
<b>Geographical representativeness</b>	Worldwide			
<b>Technological representativeness</b>	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Manufacturing Plant: Indonesia	Electricity mix AC; Europe consistent; consumption mix, at power plant; US	Electricity mix AC; Europe consistent; consumption mix, at power plant; US	Electricity mix AC; Europe consistent; consumption mix, at power plant; US

Compulsory indicators		EASERGY CL110 - EMS59443					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3.03E-04	3.03E-04	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	4.54E-03	4.32E-03	8.84E-05	9.24E-06	7.81E-05	5.14E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	8.46E-04	7.86E-04	2.04E-05	2.17E-06	2.07E-05	1.67E-05
Contribution to global warming	kg CO <sub>2</sub> eq	1.78E+00	1.64E+00	1.94E-02	3.00E-03	7.89E-02	3.86E-02
Contribution to ozone layer depletion	kg CFC11 eq	1.12E-06	1.12E-06	0*	1.88E-10	3.17E-09	2.17E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	3.97E-04	3.72E-04	6.31E-06	1.00E-06	1.20E-05	5.38E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	1.27E-02	1.26E-02	1.73E-06	3.67E-06	1.26E-04	3.55E-05
Total Primary Energy	MJ	2.79E+01	2.61E+01	2.74E-01	4.67E-02	1.23E+00	2.66E-01

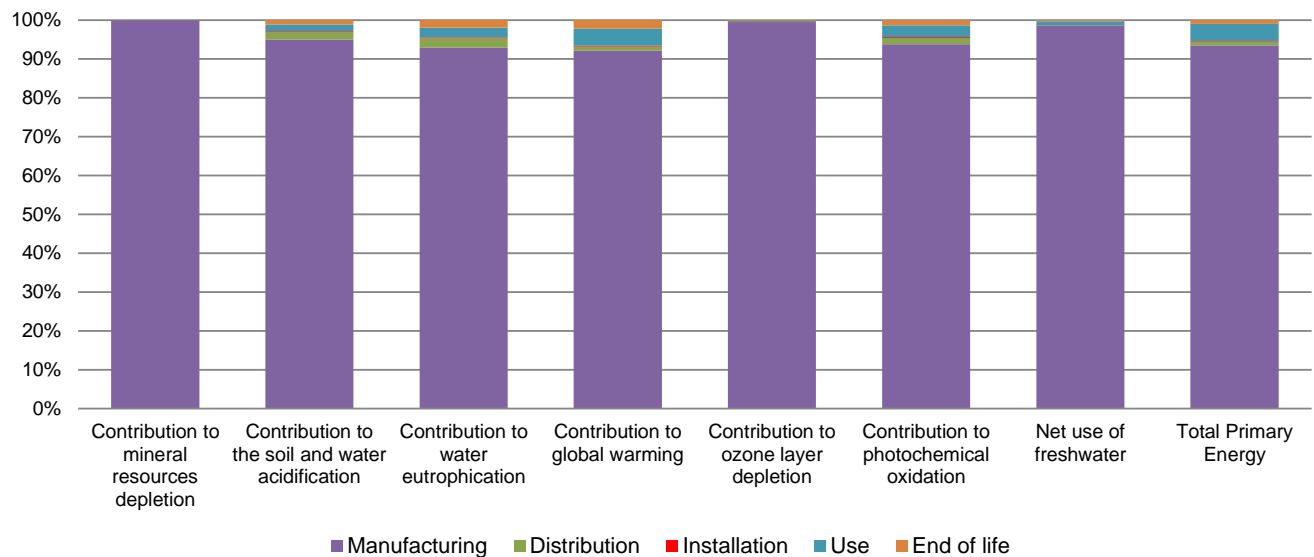

Optional indicators		EASERGY CL110 - EMS59443					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.12E+01	1.93E+01	2.72E-01	4.25E-02	1.24E+00	3.05E-01
Contribution to air pollution	m <sup>3</sup>	1.97E+02	1.86E+02	8.23E-01	3.29E-01	7.46E+00	2.25E+00
Contribution to water pollution	m <sup>3</sup>	1.59E+02	1.49E+02	3.18E+00	3.52E-01	4.05E+00	2.34E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.83E-02	4.83E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.13E+00	2.08E+00	3.65E-04	0*	4.56E-02	2.58E-04
Total use of non-renewable primary energy resources	MJ	2.58E+01	2.40E+01	2.73E-01	4.67E-02	1.18E+00	2.66E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.13E+00	2.08E+00	3.65E-04	0*	4.56E-02	2.58E-04
Use of renewable primary energy resources used as raw material	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.37E+01	2.19E+01	2.73E-01	4.67E-02	1.18E+00	2.66E-01
Use of non renewable primary energy resources used as raw material	MJ	2.11E+00	2.11E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*

Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.13E+00	8.47E-01	0*	3.26E-02	3.54E-03	2.48E-01
Non hazardous waste disposed	kg	7.66E-01	7.50E-01	6.88E-04	1.44E-04	1.21E-02	3.16E-03
Radioactive waste disposed	kg	1.29E-03	1.29E-03	4.90E-07	2.20E-07	2.31E-06	1.57E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6.26E-02	6.89E-03	0*	3.21E-02	0*	2.36E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	7.67E-03	5.29E-04	0*	0*	0*	7.14E-03
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6, database version 2016-11.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00236-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	V26	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	07/2017	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

SCHN-00236-V01.01-EN

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

07/2017