


Product Environmental Profile

WATSN63/4H



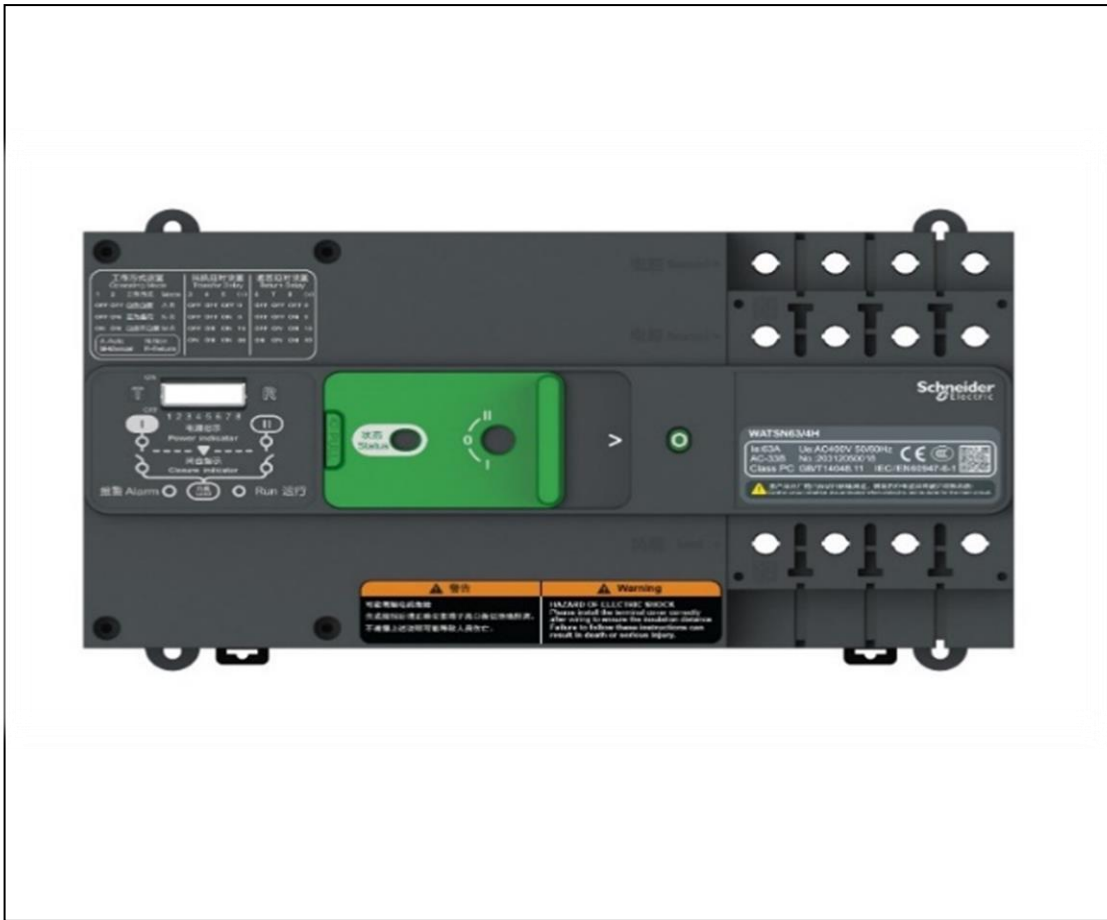


General information

Representative product	WATSN63/4H - NH00634
Description of the product	WATSN63/4H is transfer switching equipment (TSE) which to be used in power systems for transferring a load supply between a normal and an alternate source with a supply interruption during transfer.
Functional unit	Power changeover during 10 years electrical power supply of a downstream installation with an electrical and mechanical control. The functional unit is characterized by a type PC, a control circuit voltage U _c 230/400V, rated voltage U _e 230/400V, rated shock withstand voltage U _{imp} 6kV, I _{cw} 5kA/0.1s, in accordance with the IEC 60947 standard.



Constituent materials

Reference product mass 3250 g including the product, its packaging and additional elements and accessories

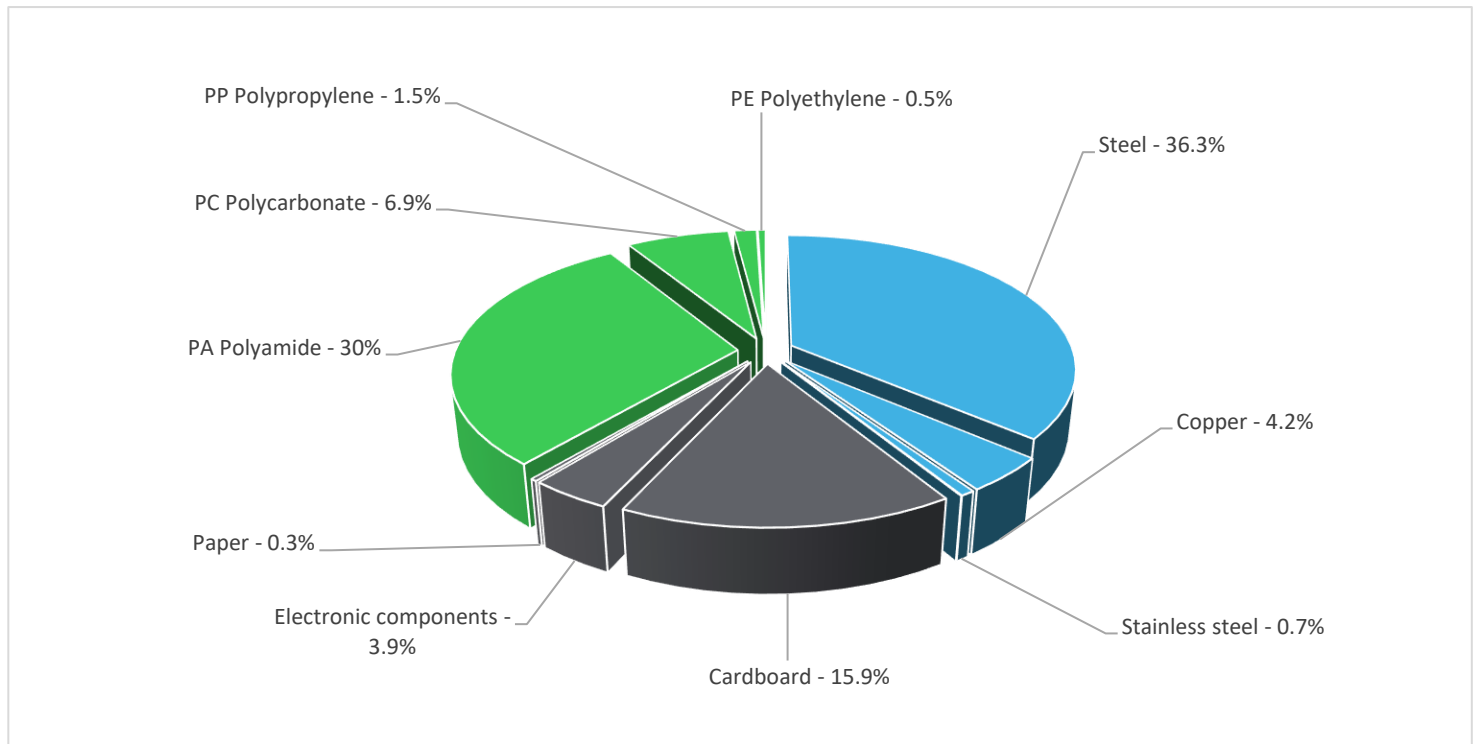

Plastics	38.8%
Metals	41.2%
Others	20.0%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium, flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), or phthalates (Bis(2-ethylhexyl) phthalate DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The WATSN63/4H presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 550.7 g, consisting of cardboard (95.7%), Paper (2.7%), PE film (1.6%)
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains electronic card (101.37g), PA6 FR(17) (4.74g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</p> <p>Recyclability potential: 62% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>




Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
Use scenario	The product is in active mode 1% of the time with a power use of 1.6W and in Standby mode 99% of the time with a power use of 0.4W for 10 years.			
Geographical representativeness	China			
Technological representativeness	WATSN63/4H is transfer switching equipment (TSE) which to be used in power systems for transferring a load supply between a normal and an alternate source with a supply interruption during transfer.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN

Compulsory indicators		WATSN63/4H - NH00634					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	8.95E-03	8.95E-03	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2.06E+00	2.02E+00	1.91E-03	0*	3.98E-02	8.68E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.15E-01	1.04E-01	4.41E-04	3.01E-05	1.05E-02	2.58E-04
Contribution to global warming	kg CO ₂ eq	3.35E+02	2.97E+02	4.19E-01	0*	3.67E+01	5.34E-01
Contribution to ozone layer depletion	kg CFC11 eq	6.70E-05	6.67E-05	0*	0*	2.92E-07	2.26E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2.24E-01	2.19E-01	1.37E-04	0*	4.70E-03	8.90E-05

ENVPEP2007006_V1 - Product Environmental Profile - WATSN63/4H

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.21E+00	1.16E+00	0*	0*	4.10E-02	4.21E-04
Total Primary Energy	MJ	6.39E+03	5.78E+03	5.93E+00	0*	6.01E+02	4.19E+00

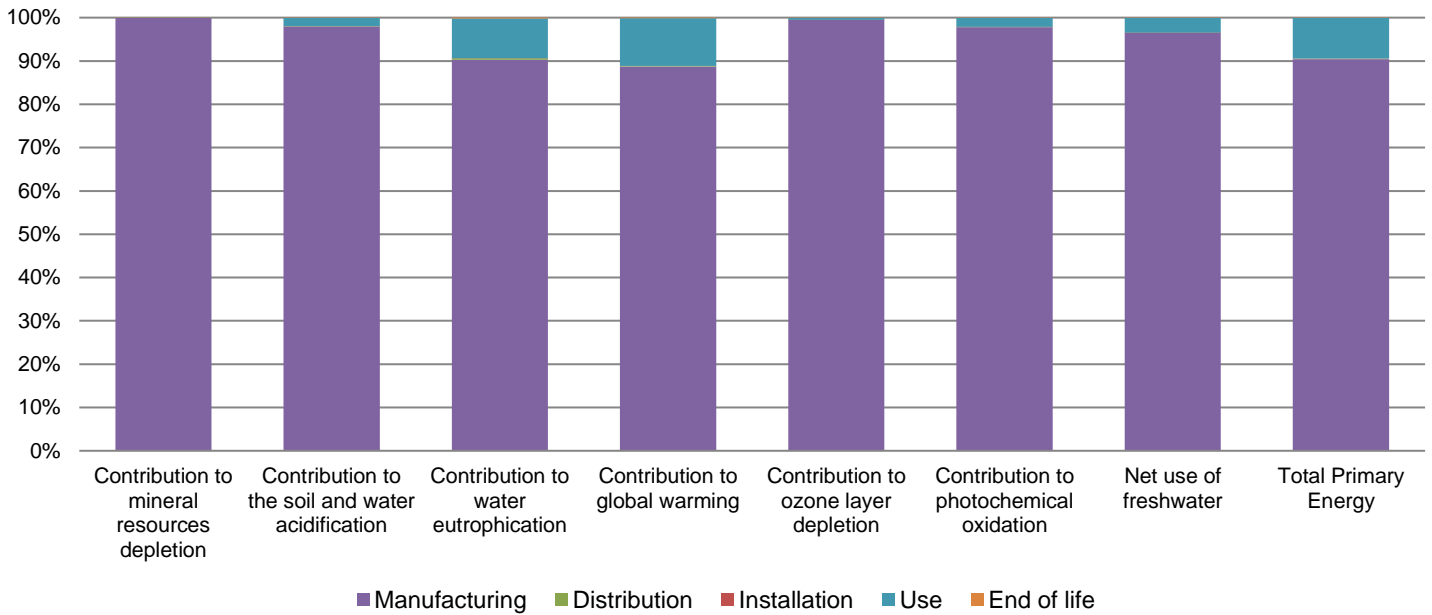

Optional indicators		WATSN63/4H - NH00634					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	3.60E+03	3.04E+03	5.89E+00	3.86E-01	5.55E+02	3.37E+00
Contribution to air pollution	m³	2.36E+04	1.97E+04	1.78E+01	0*	3.81E+03	3.02E+01
Contribution to water pollution	m³	1.98E+04	1.79E+04	6.90E+01	4.52E+00	1.83E+03	3.87E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	5.32E-01	5.32E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	4.35E+02	4.04E+02	0*	0*	3.08E+01	0*
Total use of non-renewable primary energy resources	MJ	5.95E+03	5.37E+03	5.92E+00	0*	5.70E+02	4.19E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.33E+02	4.02E+02	0*	0*	3.08E+01	0*
Use of renewable primary energy resources used as raw material	MJ	2.09E+00	2.09E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.92E+03	5.34E+03	5.92E+00	0*	5.70E+02	4.19E+00
Use of non renewable primary energy resources used as raw material	MJ	3.57E+01	3.57E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.52E+02	1.47E+02	0*	0*	1.18E+00	3.93E+00
Non hazardous waste disposed	kg	9.91E+02	9.85E+02	0*	0*	6.66E+00	0*
Radioactive waste disposed	kg	7.96E-01	7.95E-01	0*	0*	2.19E-04	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.58E+00	3.16E-01	0*	5.47E-01	0*	1.72E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	8.76E-02	0*	0*	0*	0*	8.76E-02
Exported Energy	MJ	1.69E-03	1.59E-04	0*	1.53E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2007006_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	08/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

Published by Schneider Electric

ENVPEP2007006_V1

© 2019 - Schneider Electric – All rights reserved

08/2020