


# Product Environmental Profile

## Head Lamp



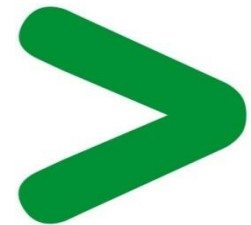


## General information

<b>Representative product</b>	Head Lamp - AEP-LF01-S1000
<b>Description of the product</b>	Mobiya Front Headlamp comes with 2 color lights- Red and White. White light ensures enough light to carry essential activities, Red light emits light to see, while at the same keeping your eyes adjusted to the darkness. RED flash (strobe) light is perfect while walking and cycling to ensure you are seen during dusk and dark hours and also which can be conveniently worn and mounted in varied positions for applications like camping, hiking, cooking, reading, cycling, gardening etc..
<b>Functional unit</b>	Front headlamp is used for lighting to provide illumination to people by supplying 60 lumens of light for 5 hours with fully charged battery to carry essential activities.



## Constituent materials

**Reference product mass** 94.03 g including the product, its packaging and additional elements and accessories

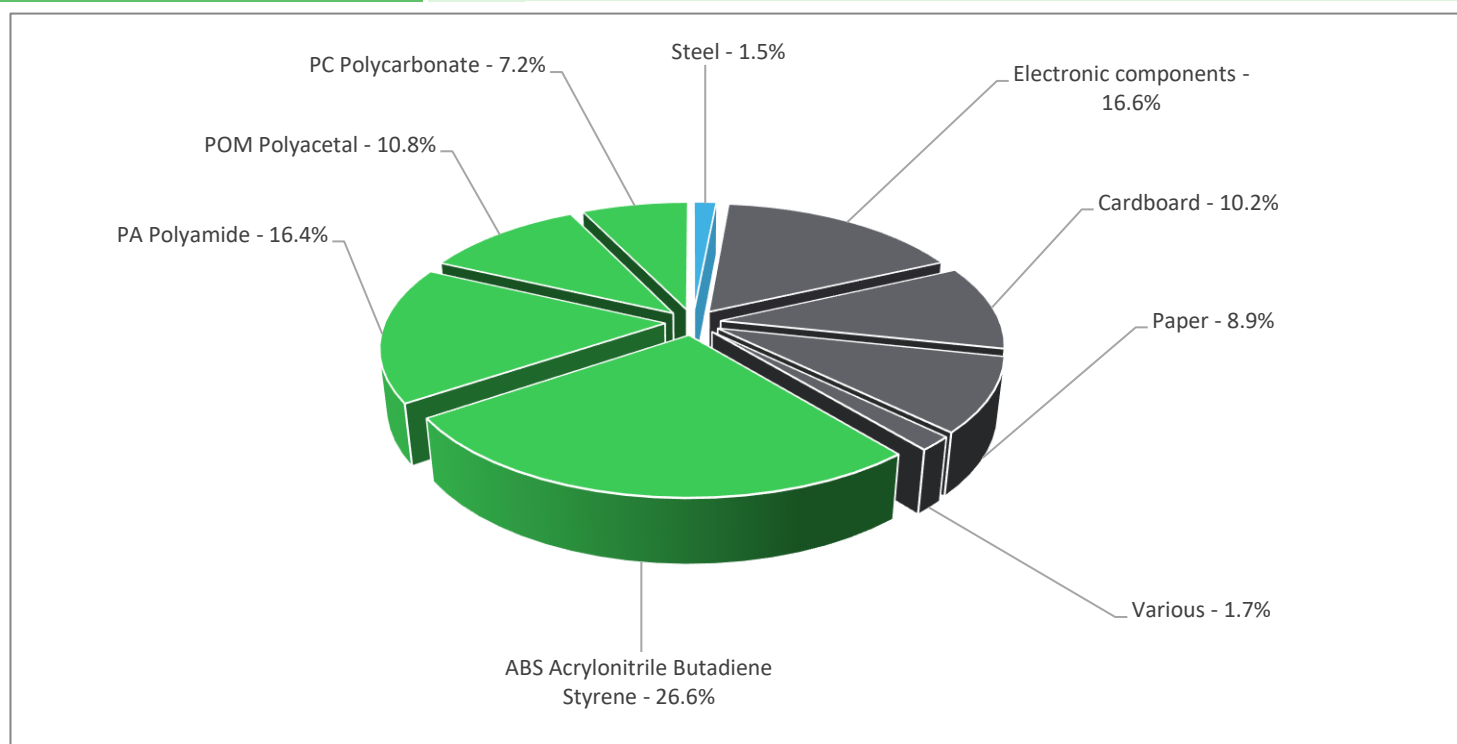

Plastics	61.0%
Metals	1.5%
Others	37.4%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

### The Head Lamp presents the following relevant environmental aspects


<b>Manufacturing</b>	Manufactured at a production site complying with the regulations
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 18.6 g, consisting of cardboard (53.76%), Paper (46.24%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	This product does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains Printed Circuit Board Assembly (6.239 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>33%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts

<b>Reference life time</b>	10 years			
<b>Installation elements</b>	This product does not require any special components during installation			
<b>Use scenario</b>	The product is in 22 % active mode and 78% stand by mode with a power use of 0.43W for 10 years.			
<b>Geographical representativeness</b>	Global			
<b>Technological representativeness</b>	Mobiya Front Headlamp comes with 2 color lights- Red and White. White light ensures enough light to carry essential activities, Red light emits light to see, while at the same keeping your eyes adjusted to the darkness. RED flash (strobe) light is perfect while walking and cycling to ensure you are seen during dusk and dark hours and also which can be conveniently worn and mounted in varied positions for applications like camping, hiking, cooking, reading, cycling, gardening etc..			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Dongguan, China	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Head Lamp - AEP-LF01-S1000					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	8.24E-05	7.32E-05	0*	0*	9.19E-06	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	6.20E-02	8.70E-03	5.54E-05	0*	5.32E-02	3.29E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	5.54E-03	1.59E-03	1.28E-05	1.02E-06	3.93E-03	1.08E-05
Contribution to global warming	kg CO <sub>2</sub> eq	1.37E+01	1.22E+00	1.21E-02	0*	1.24E+01	2.51E-02
Contribution to ozone layer depletion	kg CFC11 eq	1.81E-06	5.72E-07	0*	0*	1.24E-06	1.40E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	3.28E-03	4.40E-04	3.95E-06	0*	2.84E-03	3.44E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	4.40E+01	2.20E-02	0*	0*	4.40E+01	0*
Total Primary Energy	MJ	2.61E+02	1.57E+01	1.72E-01	0*	2.45E+02	1.70E-01

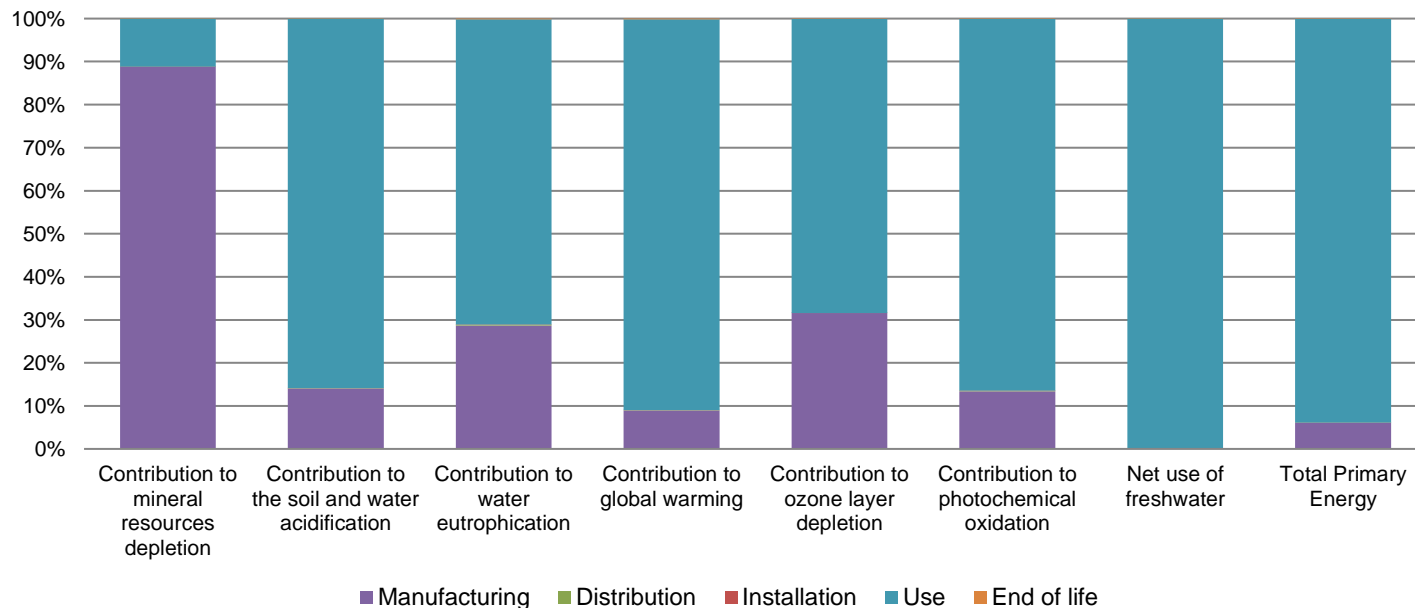

Optional indicators		Head Lamp - AEP-LF01-S1000					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.50E+02	9.93E+00	1.70E-01	0*	1.40E+02	1.30E-01
Contribution to air pollution	m³	6.73E+02	1.10E+02	5.16E-01	0*	5.61E+02	1.43E+00
Contribution to water pollution	m³	6.64E+02	1.31E+02	2.00E+00	1.53E-01	5.29E+02	1.51E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.24E-02	1.24E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.18E+01	8.70E-01	0*	0*	3.09E+01	0*
Total use of non-renewable primary energy resources	MJ	2.29E+02	1.48E+01	1.71E-01	0*	2.14E+02	1.70E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.14E+01	5.24E-01	0*	0*	3.09E+01	0*
Use of renewable primary energy resources used as raw material	MJ	3.46E-01	3.46E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.27E+02	1.27E+01	1.71E-01	0*	2.14E+02	1.70E-01
Use of non renewable primary energy resources used as raw material	MJ	2.16E+00	2.10E+00	0*	0*	6.08E-02	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	8.34E+00	4.25E+00	0*	0*	3.94E+00	1.49E-01
Non hazardous waste disposed	kg	4.67E+01	1.22E+00	0*	0*	4.55E+01	0*
Radioactive waste disposed	kg	3.16E-02	1.18E-03	0*	0*	3.04E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5.27E-02	8.11E-03	0*	1.85E-02	0*	2.61E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	4.70E-03	0*	0*	0*	0*	4.70E-03
Exported Energy	MJ	5.88E-05	5.56E-06	0*	5.33E-05	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1909002_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	10/2019	Supplemented by	PSR-0007-ed1.1-EN-2015 10 16
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP1909002\_V1

© 2019 - Schneider Electric – All rights reserved

10/2019