PowerPact B-Frame 15/20 A Thermal-Magnetic Trip

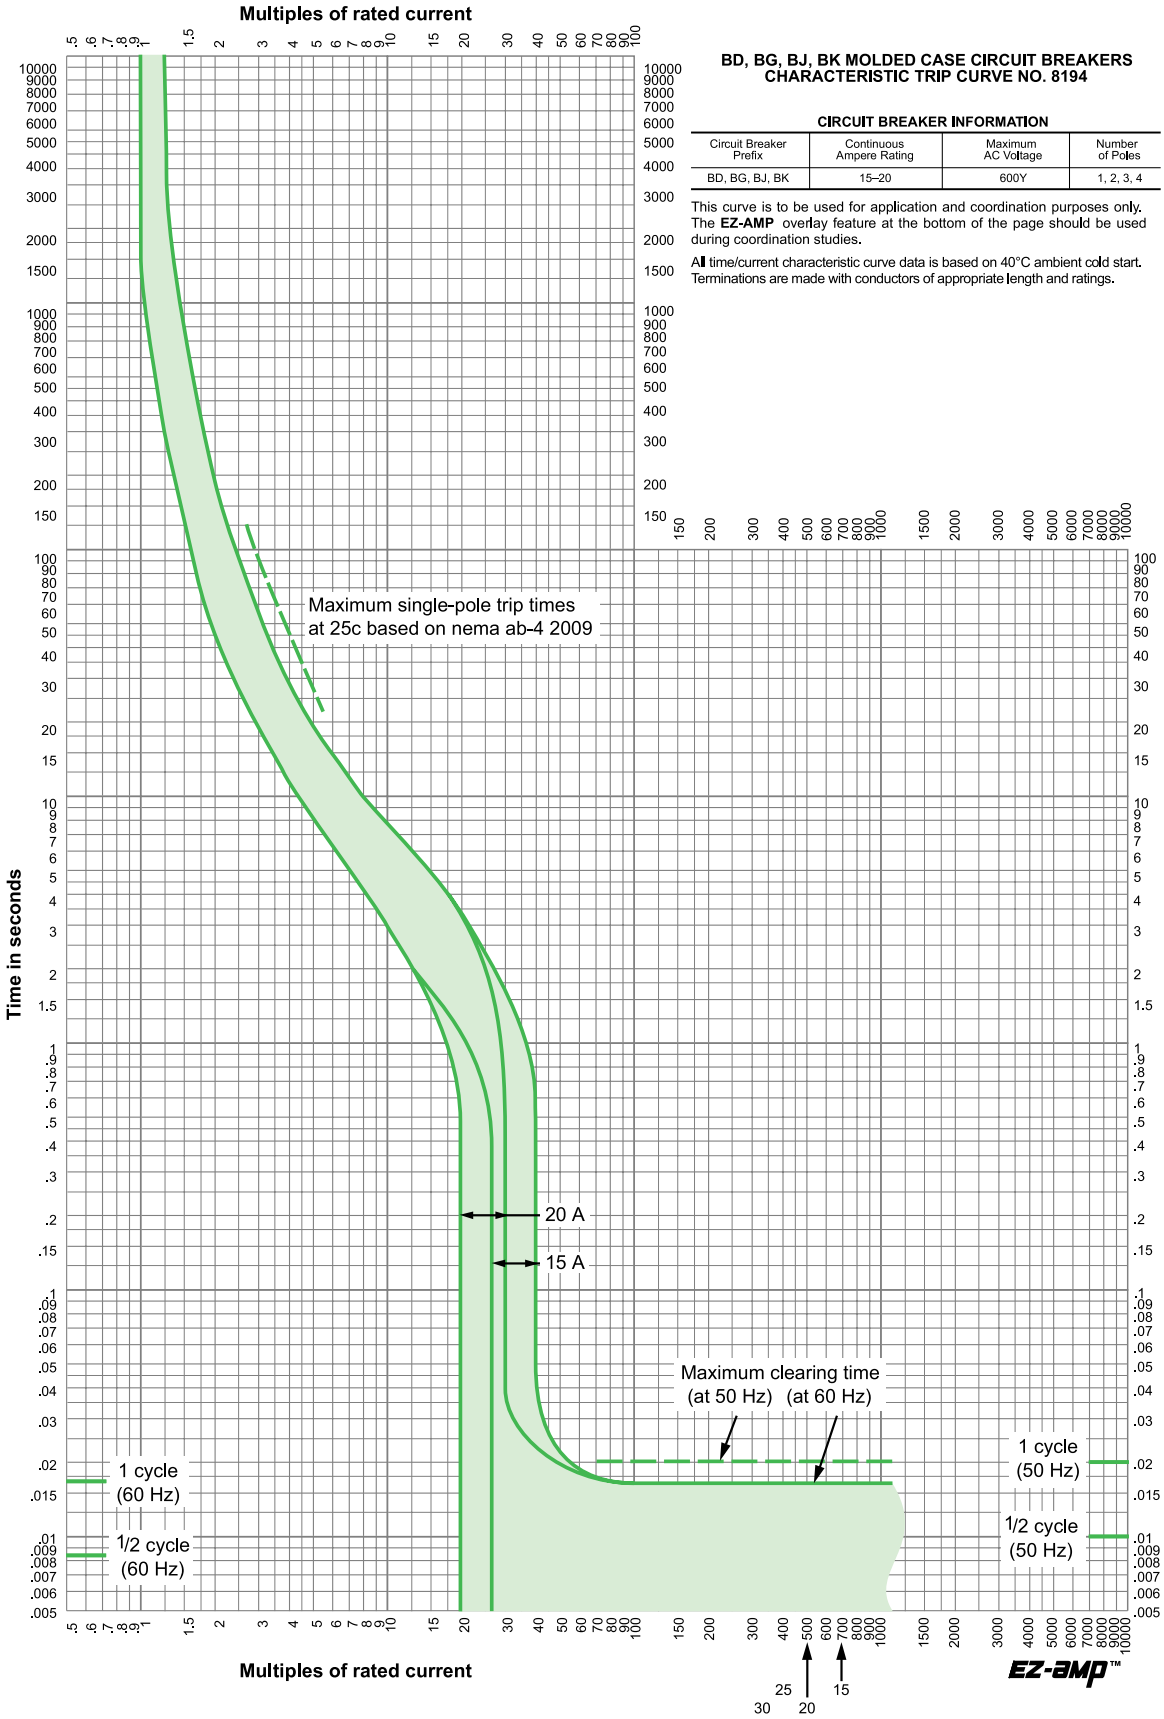

BD, BG, BJ, BK MOLDED CASE CIRCUIT BREAKERS
CHARACTERISTIC TRIP CURVE NO. 8194

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
BD, BG, BJ, BK	15–20	600Y	1, 2, 3, 4

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.