


Note:
 - Drawings Not To Scale
 - Drawings Subject to Change Without Notice
 - Dimensions are inches next to [Millimeters]

Part No.:

BMXAMI0810

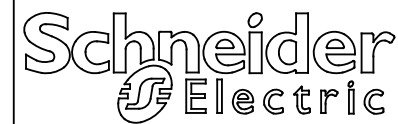

Schneider Electric United States
 North American Division
 Boston One Campus
 800 Federal Street
 Andover, MA 01810, USA
 Phone: +1 8773425173
 Email: CCC@us.schneider-electric.com

Technical Information:

| | |
|-------------------------------------|-------------------|
| Mounting: | Any slot except 0 |
| Isolation Between Channels: | 1400 VDC |
| Isolation Between Channels and Bus: | 300 VDC |
| UL & CSA: | Yes |
| CE: | Yes |
| RoHS: | Yes |
| Class 1 Div 2 CSA: | Yes |
| GOST/BV/GL/RMRS/ABS: | Yes |
| Weight [kg]: | 0.175 |

Specification:

| | |
|-------------------------------------|--|
| Description: | M340 PAC |
| Selection: | No |
| Conf.Coating - 25C to 70C op.temp.: | ± 10 V, 0 to 10 V, 0 to 5 V, 1 to 5 V, ± 5 V |
| Input Voltage Range: | 0 to 20 mA and 4 to 20 mA |
| Input Current: | |
| Output Voltage Range: | |
| Output Current: | |
| Connection Type: | BMXFTB2820/BMXFTA150/BMXFTA300 |
| Number of Inputs: | 8 |
| Number of Outputs: | |