

# ECOFIT™ for your MV Switchboard

Fluokit M36 / FP [AREVA, Schneider Electric]

Medium voltage distribution

Achieve higher sustainable performance with ECOFIT™ modernization solution!



## Benefits

- Extend your switchgear lifetime.
- Digitization, enable access to asset and energy management.
- Reduced environmental impact
- Enhance your process dependability.
- Optimize your maintenance service costs & limits your investments.
- New ECOFIT™ spare parts availability.

### Maximize continuity of operation

- Life time extension for existing switchgear.
- Less downtime than with full panel replacement.
- Reduces plants shutdown time from days to hours.

### World class manufacturer design

- Original manufacturer tested solution.
- Worldwide support with manufacturer warranty.
- No change of cables and no civil work.
- Safety of people and surrounding equipment.
- Improve reliability and quality with compliance to new standards.


### Reduce environmental impact

- Access to energy management with digital products.
- Efficient use of natural resources by replacing only active components.
- Recycling of obsolete equipment (metals, plastics, SF6, etc).

### Schneider Electric team with you

- Worldwide support.
- Manufacturer expertise.
- Skilled installation and commissioning experts.


## Total Cost of Ownership evolution

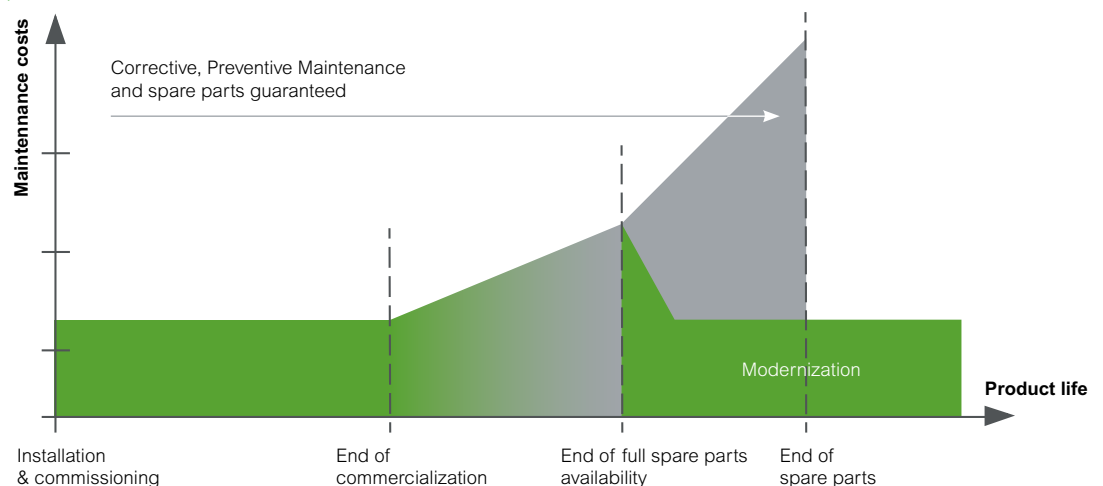

# Fluokit M36 / FP with FP

Original brand: AREVA, Schneider Electric

## ECOFIT™ proposal

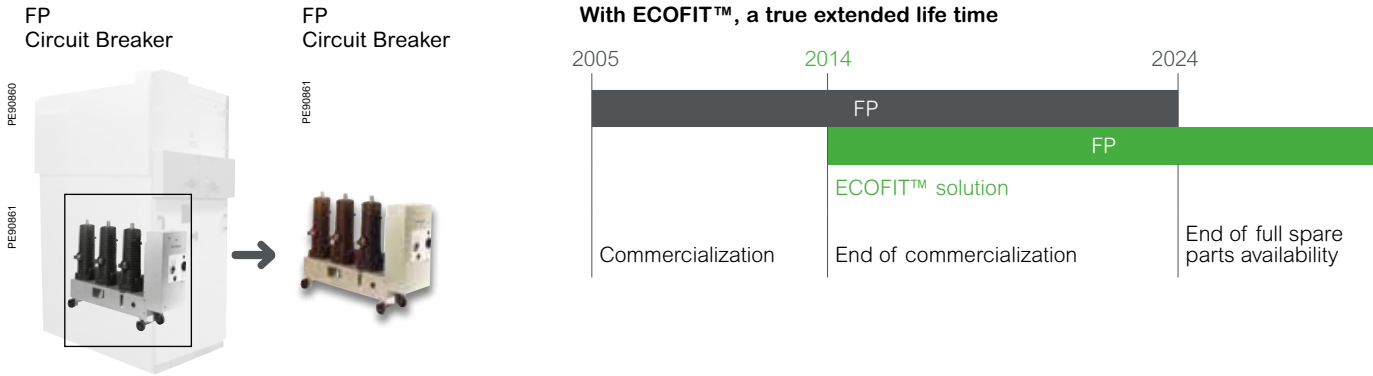

## Main technical characteristics


	FP
Rated current (I <sub>r</sub> )	400-3150 A
Short circuit current (I <sub>sc</sub> )	16-20-25-31.5 kA
Rated voltage U <sub>n</sub> (50/60 Hz)	36 kV

	FP
Technology	SF6
Rated voltage U <sub>r</sub> (kV)	36
Surge withstand voltage U <sub>p</sub> (kV)	170
Nominal frequency (Hz)	50-60
Rated current I <sub>r</sub> (A)	400-3150
Short circuit current I <sub>sc</sub> (kA)	16-20-25-31.5
Short circuit duration T <sub>k</sub> (s)	3

	FP
Switching sequence	O-3mn-CO-3mn-CO CO-15s-CO O-0.3s-CO-3mn-CO
Closing time (ms)	70
Opening time (ms)	50
Number of switching operations	10000
Service temperature (°C)	-5/+40

## Additional offer

- SF6 recycling: think about the environment and comply with regulations and policies. We offer a complete solution to take-back and recycle your obsolete MV equipment, including the SF6 gas. [Consult us!](#)
- Improve energy and asset management: replacement of old protection relay with digital and connected relay.

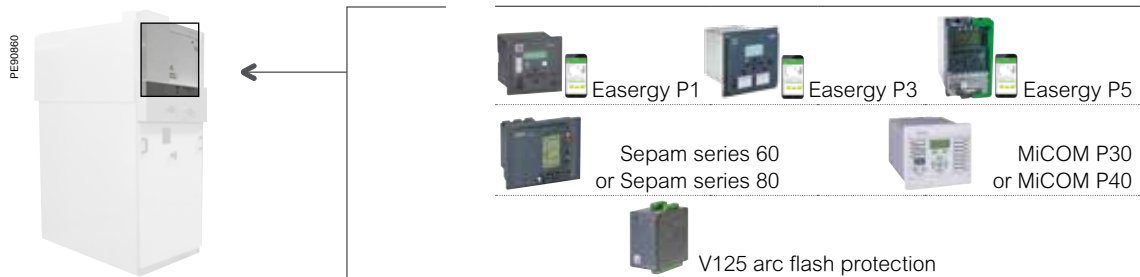

Schneider Electric Industries SAS  
 35 rue Joseph Monier  
 92500 Rueil-Malmaison, France  
 Phone: + 00 (0) 1 41 29 70 00  
[www.schneider-electric.com](http://www.schneider-electric.com)

Life Is On

