# PowerPact B-Frame 25/30 A Thermal-Magnetic Trip

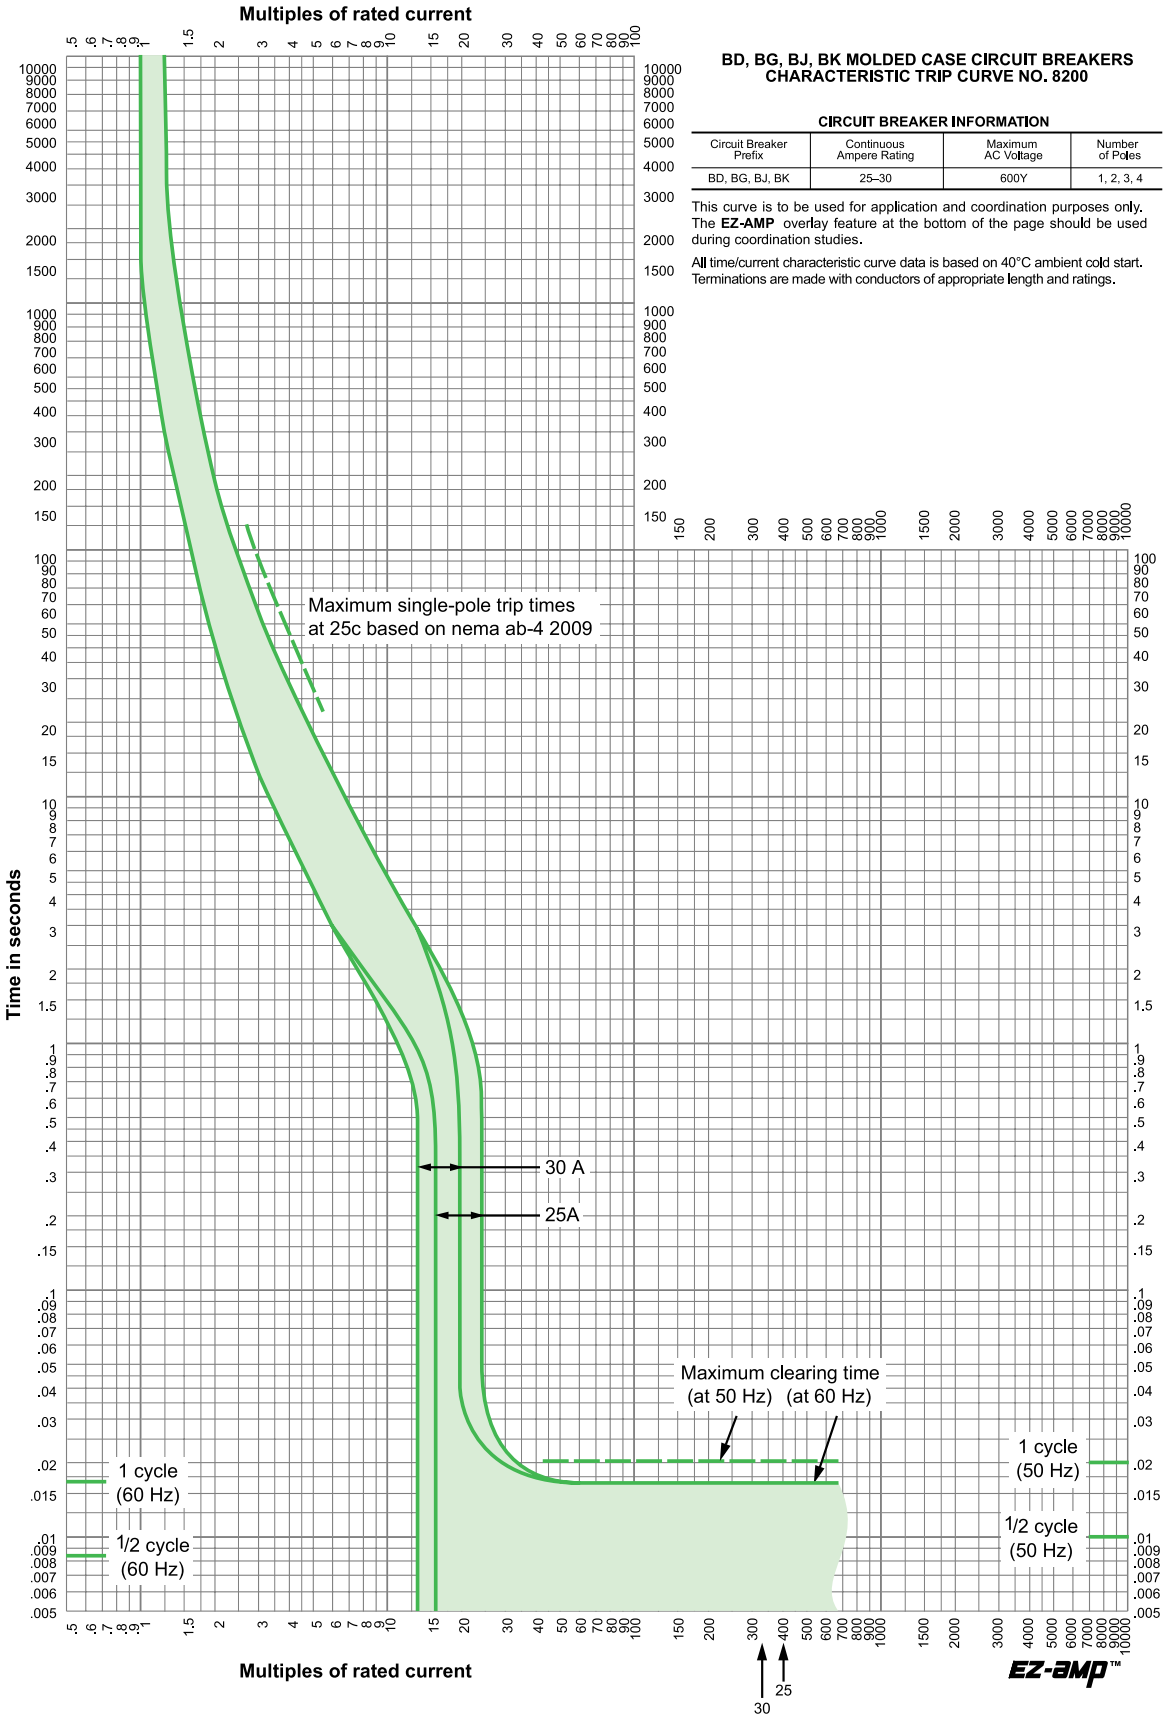


**BD, BG, BJ, BK MOLDED CASE CIRCUIT BREAKERS**
**CHARACTERISTIC TRIP CURVE NO. 8200**

**CIRCUIT BREAKER INFORMATION**

| Circuit Breaker Prefix | Continuous Ampere Rating | Maximum AC Voltage | Number of Poles |
|---|---|---|---|
| BD, BG, BJ, BK | 25–30 | 600Y | 1, 2, 3, 4 |

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.