

## Slim in Size

# Big on Features




Clipsal's new DIN mounted, 30mA combination RCD/MCBs are available as single module devices to save valuable switchboard space.

### Features and Benefits

- **Top and bottom line and load compatible** for ease of installation.
- **6kA fault level** suit both residential and commercial applications.
- Only 18mm wide and available in four current ratings.
- Short circuit interrupting capacity of 6kA.
- Rated at 240V, 30mA, type A, C-curve.
- One module width – ideal for retrofit installations where space is limited.
- Two pole safety feature allows switching of both Active and Neutral contacts.
- Trip free locking device (lockable 'on' or 'off' position).
- Compatible with Clipsal's 4LD Lock Dog.
- AS/NZS 61009 compliance.
- Two year warranty.

# Good things now come in slim packages

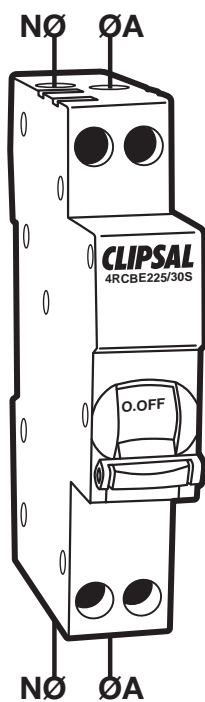

4RCBE2

## Applications

- Suitable for residential, commercial and industrial applications.
- Ideal for retrofit installations where pole space is a problem.
- Small width allows a greater number of RCD/MCBs to be installed in the one enclosure.

Cat. No.	Current Rating	Trip Sensitivity	Poles	18mm Modules	Curve
4RCBE210/30S	10A	30mA	2	1	C
4RCBE216/30S	16A				
4RCBE220/30S	20A				
4RCBE225/30S	25A				

Cat. No.	Description	Poles	Modules
4BB5/26	Combined A + N busbar	26	13
4BB5	Connector 25mm <sup>2</sup> conductor	-	-

### Schneider Electric (Australia) Pty Ltd

33-37 Port Wakefield Road, Gepps Cross,  
South Australia 5094

PO Box 132, Enfield Plaza,  
South Australia 5085

Telephone (08) 8161 0511  
Facsimile (08) 8161 0900  
Email [plugin@clipsal.com.au](mailto:plugin@clipsal.com.au)  
Internet [www.clipsal.com](http://www.clipsal.com)

**National Customer Care Enquiries:**  
**1300 2025 25**

**National Customer Care Facsimile:**  
**1300 2025 56**

**International Enquiries**  
**International Sales and Marketing**  
Email [export@clipsal.com.au](mailto:export@clipsal.com.au)

**Schneider Electric (NZ) Ltd**  
38 Business Parade South, Highbrook,  
East Tamaki, Manukau 2013,  
NEW ZEALAND

Telephone + 64 9 829 0490  
Facsimile + 64 9 829 0491  
Internet [www.schneider-electric.co.nz](http://www.schneider-electric.co.nz)

**Clipsal Customer Care**  
Freephone 0800 652 999  
Freefax 0800 101 152  
Email [sales@nz.schneider-electric.com](mailto:sales@nz.schneider-electric.com)  
Internet [www.clipsal.co.nz](http://www.clipsal.co.nz)

You can find this brochure and many others  
online in PDF format at: [clipsal.com](http://clipsal.com)

Follow the links off the home page or access  
the following page directly:  
[clipsal.com/brochures](http://clipsal.com/brochures)

**clipsal.com**

Schneider Electric (Australia) Pty Ltd reserves  
the right to change specifications, modify designs  
and discontinue items without incurring obligation  
and whilst every effort is made to ensure that  
descriptions, specifications and other information  
in this catalogue are correct, no warranty is given  
in respect thereof and the company shall not be liable  
for any error therein.

printed on recycled paper