



Harmony XALF

Lift inspection stations



Harmony

Discover [Harmony](#)

Advanced operator interface and industrial relays

Harmony operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. **Harmony** includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

Explore our offer

- [Harmony](#) Push Buttons and Switches
- [Harmony](#) HMI Operator Terminals, IPC and EdgeBox
- [Harmony](#) Signaling Devices
- [Harmony](#) Electrical Relays
- [Harmony](#) Safety

Life Is 

Schneider
Electric


Quick access to product information

Get technical information about your product



References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules

References	Input range	Resolution	Input terminal block (T)	Reference	Weight (kg)
2 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	10 000 or 10 000 + sign	0 000 0 0 000 2	TM3A010 TM3A012	0,130 0,135
4 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	12 000 or 11 000 + sign	0 000 0 3 010 10	TM3A020 TM3A022	0,200 0,200
4 voltage/current or temperature inputs (I, K, R, S, E, T, N, E, C)	Thermopile (I) I, K, R, S, E, T, N, E, C Temperature (C) PT100, PT1000 E: -100 VDC S: -20 mA / -20 mA	10 000 or 10 000 + sign	3 010 10 2 010 10	TM3A030 TM3A032	0,200 0,200
4 differential temperature inputs	Thermopile (I) I, K, R, S, E, T, N, E, C RTD-100000	10 000 or 10 000 + sign	0 000 0 2 010 10	TM3A040 TM3A042	0,130 0,130
4 voltage/current	-10...+10 VDC	12 000 or 11 000 + sign	0 000 0 3 010 10	TM3A050 TM3A052	0,200 0,200

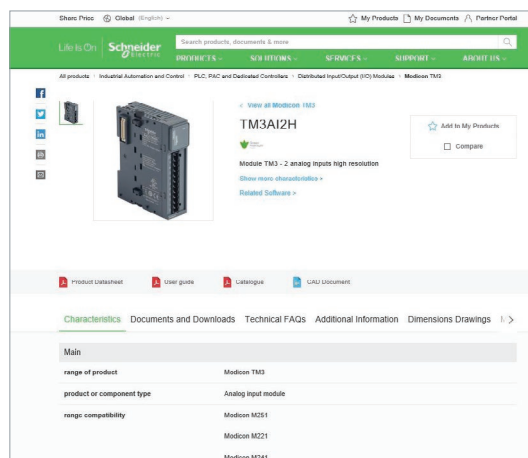

Find your catalog

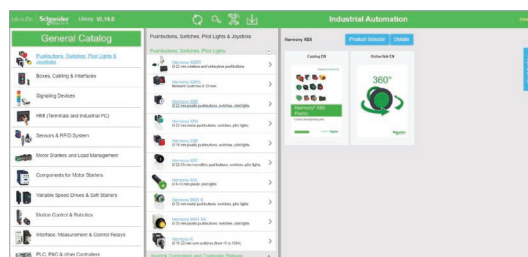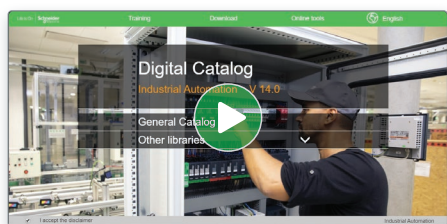


- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

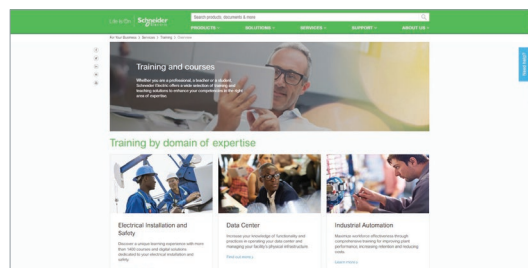

Life Is On

Schneider Electric

General contents

Lift inspection stations Harmony XALF

<i>Selection guide</i>	<i>page 2</i>
■ Presentation, functions	<i>page 4</i>
■ Description	<i>page 5</i>
■ References	
□ Hoistway boxes	<i>page 6</i>
□ Pit switch boxes	<i>page 7</i>
□ Top of car boxes.....	<i>page 8</i>
□ Separate components	<i>page 9</i>
■ Product reference index	<i>page 14</i>

Type of applications	All applications	
Enclosures	Plastic	Glass-reinforced polyester
	Complete stations and separate components for customer assembly	Empty insulated enclosures




Main feature	Pre-drilled control stations		Pre-drilled or undrilled enclosures
Associated control and signaling units	Harmony XB5 with plastic bezel		Harmony XB7, monolithic, plastic Harmony XB4 with metal bezel Harmony XB5 with plastic bezel
Number of cut-outs for Ø 22 control and signaling units	1, 2, 3, 4 or 5	1, 2 or 3 (complete stations) 1, 2, 3, 4 or 5 (empty enclosures)	1, 2 or 3 1, 2, 4, 8 or 16
Material	Polycarbonate		ABS Glass-reinforced polyester
Color	Yellow lid Light gray base	Dark gray lid Light gray base	Light gray or yellow lid Light gray base Coloured gray throughout
Degree of protection	IP66, IP67, IP69, IP69K		IP54 IP65, IP69, IP69K
Function	Emergency Stop or Emergency switching off	Start or Stop Start-Stop with pilot light Motion control	According to equipment fitted: <input type="checkbox"/> Start or Stop <input type="checkbox"/> Start-Stop with pilot light <input type="checkbox"/> Motion control <input type="checkbox"/> Emergency stop
Cable entries	Knock-outs (CM12)		Knock-outs (ISO 20) Undrilled
Type references	XALK	XALD	XALE XAPA

All applications		Specific applications		
Metal	Metal front plate, insulated protective rear cover	Plastic	Metal	
Empty enclosures	Empty, flush mounting enclosures: front plate + rear cover	Control stations for severe environments	Lift inspection stations	Key operated control stations



Pre-drilled enclosures	Pre-drilled or undrilled enclosures	Pre-drilled front plates & rear covers	Pre-drilled empty control stations	Pre-drilled empty enclosures or fitted stations	Fitted stations
Harmony XB4 with metal bezel Harmony XB5 with plastic bezel			Harmony XB5 with plastic bezel	Harmony XB5 or XB7 with plastic bezel	With key lock
8, 16, 24, 30 or 40	1, 2, 3, 4, 5, 6, 8 or 10	1, 2, 3, 4 or 5	1, 2, 3, 4 or 5	1, 2, 3, 4, 5 or 6 with or without power socket	-
Aluminium alloy or sheet steel	Zinc or aluminium alloy	Front plate: brushed aluminium Rear cover: polystyrene	Mineral reinforced polyamide	Polycarbonate	Zinc alloy
Blue lid and base	XAPD, XAPG: Grey lid & base XAPK: Yellow lid & base XAPO: Orange lid & base	Unpainted aluminium	Black lid Black base	Yellow lid Light gray base	Gray
IP54	IP65, IP66, IP69		IP66, IP67, IP69, IP69K	IP44 (with power socket) IP55 or IP66 depending on model	IP54
According to equipment fitted: <input type="checkbox"/> Start or Stop <input type="checkbox"/> Start-Stop with pilot light <input type="checkbox"/> Motion control <input type="checkbox"/> Emergency stop					Start-Stop
<input type="checkbox"/> Tapped entries for cable-glands <input type="checkbox"/> or undrilled	Tapped entries for cable-glands	Knock-outs (with protective rear cover)	Two ISO 20 open entries	<input type="checkbox"/> Knock-outs (CM12) <input type="checkbox"/> or undrilled	Tapped for cable-glands
XB2SL	XAPD, XAPK, XAPG, XAPO	XAPE	XALG	XALF	XAPS

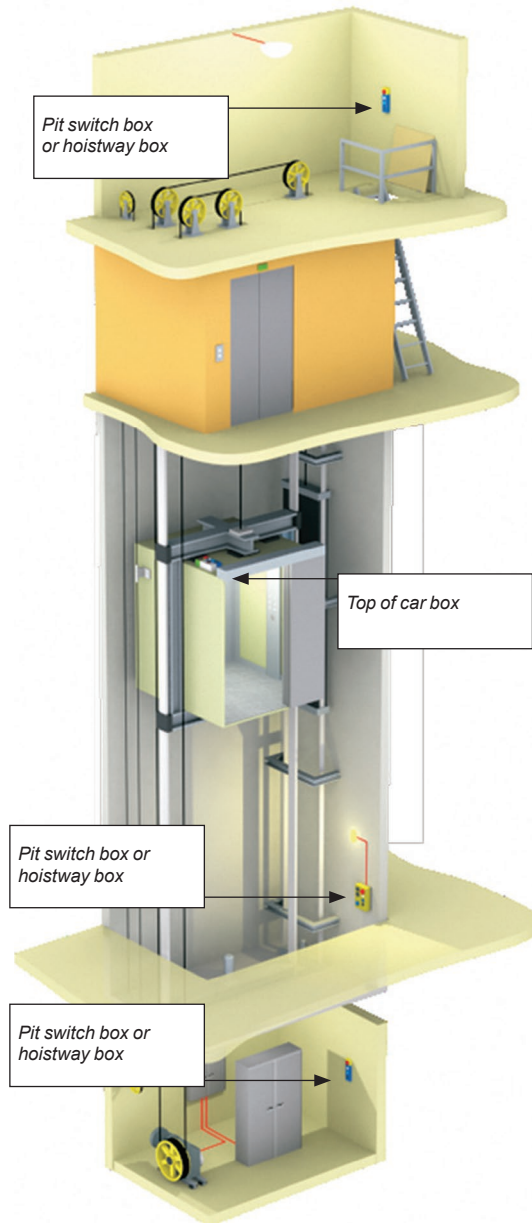

Presentation

The Harmony XALF lift inspection stations are designed for lift maintenance applications.

Three types of station are available:

- Top of car boxes
 - Pit switch boxes
 - Hoistway boxes
- These boxes make it possible to control movement of the lift.
 - Used in conjunction with the other operating components, they facilitate inspection and repair work.
 - They are installed outside the lift car.
 - Inspection stations help prevent the risk of uncontrolled movement of the lift while inspections are being carried out.
 - Supplied complete, these lift inspection stations are equipped with CE certified Ø 22 control and signaling units from the Harmony XB5 and XB7 ranges.
 - Stations can also be configured by the user: empty enclosures that can be equipped to meet custom requirements are available from the catalog.

Environment

- Degree of protection (conforming to standard EN/IEC 60529):
 - IP 54
 - IP 44 with power socket (see [page 11](#))
- Conformity to standards:
 - EN 81-20, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4, and EN/IEC 60947-5-5
 - EN/ISO 13850 (if equipped with "trigger action" Emergency Stop pushbuttons with pilot light and mechanical state indicator)
- Product certification: CE

Mounting and fixing

- Hoistway box and pit switch box: Knock-outs for no. 13 (CM12, Pg13.5) cable glands and tapped ISO 20
- Top of car box: cut-outs required


Functions

Function	Equipment
Control and signaling	<ul style="list-style-type: none"> ■ Flush pushbuttons, unmarked or with marking (1) ■ Selector switches with standard handle or key switches ■ Pilot lights with integral LED and "true colors" ■ Illuminated pushbuttons
Emergency Stop (EN/ISO 13850)	<ul style="list-style-type: none"> ■ Mushroom head, trigger action and latching, Emergency Stop pushbutton with pilot light and mechanical state indicator: <ul style="list-style-type: none"> □ White LED, on front panel □ 360° mechanical indication by green ring and by 2 windows with green/red indication on front panel
Power socket	<ul style="list-style-type: none"> ■ Extensive range of power sockets to meet the specific needs of each country. Degree of protection IP 44.

(1) Double injection-molded marking.

Control stations and enclosures


Lift inspection stations Harmony XALF

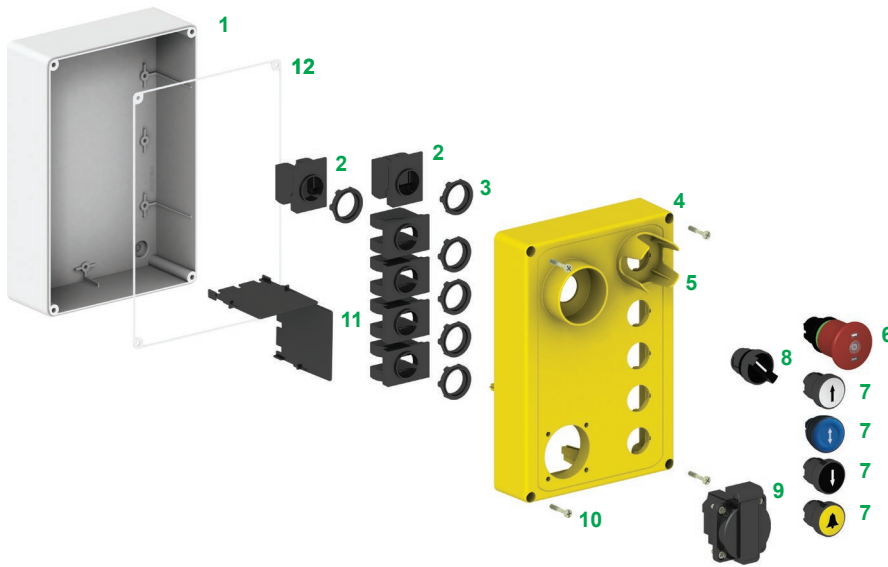

Description


Top of car boxes

- 1 Enclosure base, gray
- 2 Contact block
- 3 Nuts
- 4 Enclosure lid, yellow
- 5 Guard
- 6 Red, mushroom head, latching Emergency Stop pushbutton with pilot light (white) and mechanical state indicator (green/red)
- 7 Flush pushbuttons, with marking: ⬆, ⬇, ⬆, ⬇, ⚠
- 8 Selector switch with standard handle
- 9 230 V power socket
- 10 Stainless steel screws
- 11 Partition plates
- 12 Gasket

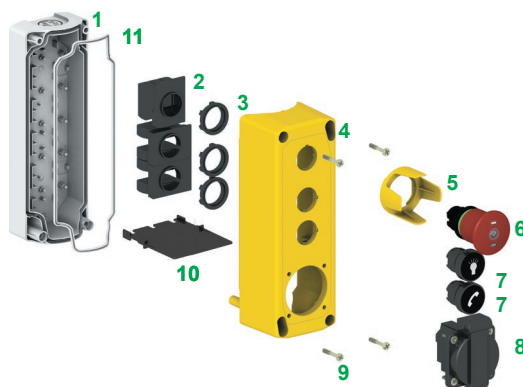

Pit switch boxes

- 1 Enclosure base, gray
- 2 Contact block
- 3 Nuts
- 4 Enclosure lid, yellow
- 5 Guard
- 6 Red, mushroom head, latching Emergency Stop pushbutton with pilot light (white) and mechanical state indicator (green/red)
- 7 Flush pushbuttons, with marking ⬆, ⬇, ⬆, ⬇
- 8 230 V power socket
- 9 Stainless steel screws
- 10 Partition plate
- 11 Gasket

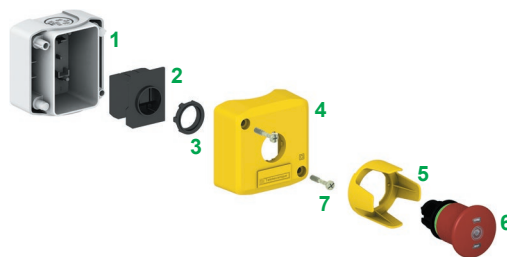

Hoistway boxes


























- 1 Enclosure base, gray
- 2 Contact block
- 3 Nut
- 4 Enclosure lid, yellow
- 5 Guard
- 6 Mushroom head for latching Emergency Stop pushbutton with pilot light (white) and mechanical state indicator (green/red)
- 7 Stainless steel screws

Control stations and enclosures

Lift inspection stations

Harmony XALF

Complete stations, empty enclosures















Hoistway boxes (gray base and yellow lid)						
Complete boxes						
Description	Type of push	Type of contact		Shape of head	Reference	Weight kg/lb
		NO	NC			
 XALFKT64451  XALFKT6445	1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFKT64451 0.175/0.386
			–	1		XALFKT64421 0.165/0.364
			–	2		XALFKT64441 0.175/0.386
 XALFKT6445	1 red, mushroom head Emergency Stop pushbutton	Latching, with mechanical state indicator (green/red)	1	1		XALFKT6445•11 (1) 0.185/0.408
			–	1		XALFKT6442 0.155/0.342
			–	2		XALFKT6444 0.165/0.364
 XALFKA2521	1 spring return pushbutton	Latching, with pilot light (white) and mechanical state indicator (green/red)	1	1		XALFKT6445•1 (1) 0.175/0.386
			1	–		XALFKA2521 0.130/0.287
			1	1		XALFKA2525 0.140/0.309
 XALFKA2523	1 spring return pushbutton	Flush black	2	–		XALFKA2523 0.140/0.309
			1	–		XALFKA5511 0.130/0.287
			1	1		XALFKA5515 0.140/0.309
 XALFKA5513	1 spring return pushbutton	Flush yellow	2	–		XALFKA5513 0.140/0.309
			1	–		XALFKA2531 0.130/0.287
			1	1		XALFKA2535 0.140/0.309
 XALFKA2531	1 spring return pushbutton	Flush black	2	–		XALFKA2533 0.140/0.309
			1	–		XALFKA2531 0.130/0.287
			1	1		XALFKA2535 0.140/0.309
Empty enclosure for configuration by the user						
Number of Ø 22 mm cut-outs	Dimensions (2) w x h x d mm/in.	Reference	Weight kg/lb			
1	68 X 68 X 54 / 2.68 X 2.68 X 2.13	XALFK01	0.110/0.243			

(1) Replace the ● in the reference with **B** for 24 V ~/□, with **G** for 110 ...120 V ~, or with **M** for 230...240 V ~.
 (2) Please visit our website www.schneider-electric.com for more precise information about component dimensions.

Other versions Please contact our Customer Care Center.

Pit switch boxes (gray base and yellow lid)

Complete boxes

Description	Type of push	Type of contact		Shape of head	Reference	Weight kg/lb
		NO	NC			
 XALFK2001E 1 red, mushroom head Emergency Stop pushbutton, with guard 1 spring return pushbutton 1 power socket (IEC blue) (1)	Latching, with mechanical state indicator (green/red)	1	1		XALFK2001E	0.500/1.102
	1 flush black	1	–			
						
 XALFK3001E 1 red, mushroom head Emergency Stop pushbutton, with guard 2 spring return pushbuttons 1 power socket (IEC blue) (1)	Latching, with mechanical state indicator (green/red)	1	1		XALFK3001E	0.550/1.212
	1 flush black	1	–			
	1 flush black	1	–			
						
 XALFK3011E 1 red, mushroom head Emergency Stop pushbutton, with guard 2 spring return pushbuttons 1 power socket (IEC blue) (1)	Latching, with pilot light (white 24 V ~ / ⎓) and mechanical state indicator (green/red)	1	1		XALFK3011E	0.550/1.212
	1 flush black	1	–			
	1 flush yellow	1	–			
						

Empty enclosures for configuration by the user

Number of Ø 22 mm cut-outs	Number of Ø 45 mm cut-outs for power socket	Dimensions (2) w x h x d mm/in.	Reference	Weight kg/lb
3	–	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK03	0.290/0.639
4	–	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK04	0.290/0.639
2	1	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK021	0.290/0.639
3	1	68 X 196 X 147/ 2.68 X 7.72 X 5.79	XALFK031	0.290/0.639



XALFK04



XALFK031

































(1) IEC blue power socket type XALFZE3; for other types of power socket, see page 13.

(2) Please visit our website www.schneider-electric.com for more precise information about component dimensions.

Other versions Please contact our Customer Care Center.

Control stations and enclosures

Lift inspection stations
Harmony XALF
Complete stations

Top of car boxes (gray base and yellow lid)						
Complete boxes						
Description	Type of operator	Type of contact		Shape of head	Reference	Weight kg/lb
		NO	NC			
 XALFP6004E	1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	2		XALFP6004E 0.810/1.786
	4 spring return pushbuttons	1 flush white	2	–		
		1 flush blue	2	–		
		1 flush black	2	–		
 XALFP7005E	1 flush yellow	1	–			
	1 selector switch, with guard	Standard black handle, 2-position stay put	3	3		
	1 power socket (IEC blue) (1)					
	1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with pilot light (white 24 V ~/-:-) and mechanical state indicator (green/red)	1	1		XALFP7005E 0.850/1.873
4 spring return pushbuttons	1 flush white	2	–			
	1 flush blue	1	–			
	1 flush black	2	–			
 XALFK3002	1 flush yellow	1	–			
	2 selector switches, with guard	Standard black handle, 2-position stay put	2	2		
		Standard black handle, 3-position spring return to center	1	1		
	1 power socket (IEC blue) (1)					
 XALFK4003	3 spring return pushbuttons	1 flush white	1	–		XALFK3002 0.400/0.882
		1 flush blue	1	–		
		1 flush black	1	–		
 XALFK4004	1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFK4003 0.550/1.213
	2 spring return pushbuttons	1 flush white	2	–		
		1 flush black	2	–		
 XALFK4004	1 selector switch, with guard	Standard black handle, 2-position stay put	3	3		
	1 red, mushroom head Emergency Stop pushbutton, with guard	Latching, with mechanical state indicator (green/red)	1	1		XALFK4004 0.495/1.091
	1 spring return pushbutton	1 flush blue	2	–		
1 spring return pushbutton	1 double-head	2	–			
1 selector switch, with guard	Standard black handle, 2-position stay put	3	3			

(1) IEC blue power socket type XALFZE3; for other types of power socket, see page 13.

Other versions Please contact our Customer Care Center.

Heads to combine with bodies: see page 12



XALFP0612

Empty enclosures for configuration by the user				
Number of Ø 22 mm cut-outs	Number of Ø 45 mm cut-outs for power socket	Dimensions (1) w x h x d mm/in.	Reference	Weight kg/lb
6	1	150 X 220 X 172 / 5.91 X 8.66 X 6.77	XALFP0612	0.500/1.102
7	1	150 X 220 X 172 / 5.91 X 8.66 X 6.77	XALFP0714	0.500/1.102

Pushbuttons, switches, and pilot lights for user assembly

Heads only						
Description	Type of push	Marking Symbol	Color	Color of push	Reference	Weight kg/lb
Heads for spring return pushbuttons	Flush		Black	Yellow	ZB5AA551	0.018/0.040
			Black	White	ZB5AA334	0.018/0.040
			White	Blue	ZB5AA651	0.018/0.040
			White	Black	ZB5AA335	0.018/0.040
			White	Black	ZB5AA252	0.018/0.040
			White	Black	ZB5AA253	0.018/0.040
	Flush, illuminated (2)		–	Orange	ZB5AA58	0.018/0.040
Illuminated mushroom head for Emergency Stop trigger action and mechanical latching pushbuttons (3)	Push-pull Ø 40 mm/1.57 in. With pilot light (4) and mechanical state indicator		–	Red	ZB5AT8643M	0.034/0.075



ZB5AA58



ZB5AT8643M

Selector switches and key switches for user assembly

Heads only						
Description	Type of operator	Shape of head	Number and type of positions	Reference	Weight kg/lb	
Heads for selector switches	Standard handle, black		2 - stay put	ZB5AD2	0.025/0.055	
			3 - spring return to center	ZB5AD5	0.025/0.055	
			Key switch with key no. 455 (5)	ZB5AG2	0.050/0.110	
Head for illuminated selector switches with standard handle (4)	Standard handle, green		2 - stay put	ZB5AK1233	0.021/0.046	



ZB5AD2



ZB5AG2



ZB5AK1233



(1) Please visit our website www.schneider-electric.com for more precise information about component dimensions.

(2) For insertion of legend.

(3) Conforming to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 98/37/EC, and to standard EN/IEC60947-5-5.

(4) For use with bodies comprising a light source with Universal LED. For light blocks and body fixing collar, see page 12.

Maximum number of contacts attached to the associated body: 2.

(5) Other key numbers available:

- Key no. 421E: add suffix **12** to the reference
- Key no. 458A: add suffix **10** to the reference
- Key no. 520E: add suffix **14** to the reference
- Key no. 3131A: add suffix **20** to the reference

Example: For a switch head with key no. 421E, 2-position stay put with key withdrawal from the left-hand position, the reference becomes: **ZB5AG212**. For specific keys with other numbers, please contact our Customer Care Center.

(6) The symbol indicates key withdrawal position(s).

Other versions Specific markings on boxes, other power sockets, special cut-outs in enclosures, and customized products

Please contact our Customer Care Center.

Control stations and enclosures

Lift inspection stations

Harmony XALF

Separate components: Ø 22 mm control and signaling units with plastic bezel



XB7EV08GP



Pilot lights							
With integral LED							
Shape of head	Type of light source (included)	Color of lens	Sold in lots of	Unit reference by supply voltage (1)			Weight kg/lb
				24 V ~/-	120 V ~	230 V ~	
Integral LED	Integral LED	Green	10	XB7EV03BP	XB7EV03GP	XB7EV03MP	0.020/0.044
		Red	10	XB7EV04BP	XB7EV04GP	XB7EV04MP	0.020/0.044
		Yellow	10	XB7EV05BP	XB7EV05GP	XB7EV05MP	0.020/0.044
		Blue	10	XB7EV06BP	XB7EV06GP	XB7EV06MP	0.020/0.044
		Clear	10	XB7EV07BP	XB7EV07GP	XB7EV07MP	0.020/0.044
		Orange	10	XB7EV08BP	XB7EV08GP	XB7EV08MP	0.020/0.044



XB5AVB1



Pilot lights with Universal LED						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Complete units						
Description	Shape of head	Supply voltage V	Color	Reference	Weight kg/lb	
Pilot lights with plain lens	Integral LED	24 ~ (50/60 Hz)	White	XB5AVB1 (ZB5AVB1 + ZB5AV013)	0.038/0.084	
			Green	XB5AVB3 (ZB5AVB1 + ZB5AV033)	0.038/0.084	
			Red	XB5AVB4 (ZB5AVB1 + ZB5AV043)	0.038/0.084	
			Orange	XB5AVB5 (ZB5AVB1 + ZB5AV053)	0.038/0.084	
			Blue	XB5AVB6 (ZB5AVB1 + ZB5AV063)	0.038/0.084	
			110...120 ~ (50/60 Hz)	White	XB5AVG1 (ZB5AVG1 + ZB5AV013)	0.038/0.084
		Green	XB5AVG3 (ZB5AVG1 + ZB5AV033)	0.038/0.084		
		Red	XB5AVG4 (ZB5AVG1 + ZB5AV043)	0.038/0.084		
		Orange	XB5AVG5 (ZB5AVG1 + ZB5AV053)	0.038/0.084		
		Blue	XB5AVG6 (ZB5AVG1 + ZB5AV063)	0.038/0.084		
		230...240 ~ (50/60 Hz)	White	XB5AVM1 (ZB5AVM1 + ZB5AV013)	0.038/0.084	
		Green	XB5AVM3 (ZB5AVM1 + ZB5AV033)	0.038/0.084		
		Red	XB5AVM4 (ZB5AVM1 + ZB5AV043)	0.038/0.084		
		Orange	XB5AVM5 (ZB5AVM1 + ZB5AV053)	0.038/0.084		
		Blue	XB5AVM6 (ZB5AVM1 + ZB5AV063)	0.038/0.084		

(1) For Faston connection version (1 x 6.35 mm and 2 x 2.8 mm), add the number "3" to the end of the reference. Example: XB7EV07BP becomes XB7EV07BP3.



XALFZE2

Power sockets					
Description	For use in	Color	Sold in lots of	Unit reference	Weight kg/lb
230 V power socket, with protective shutter (protection: IP44)	Germany	Black	1	XALFZE2	0.050/0.110
		Blue	1	XALFZE3	0.050/0.110
	France	Gray	1	XALFZF8	0.050/0.110
	Italy	Blue	1	XALFZT3	0.050/0.110
	United Kingdom	Black	1	XALFZB2	0.050/0.110
	Switzerland	Blue	1	XALFZS3	0.050/0.110



ZB5AZ903

Accessories					
Description	Application	Sold in lots of	Unit reference	Weight kg/lb	
Partition plate	For 230 V power socket	1	XALFZ1	0.010/0.022	
Fixing nut	Fixing the head of Ø 22 mm/0.86 in. control and signaling units	10	ZB5AZ903	0.002/0.004	
Plastic blanking plug, round, black (supplied with nut ZB5AZ901)	Ø 22 mm/0.86 in. cut-outs for circular heads	10	ZB5SZ3	0.009/0.020	



ZB5SZ3

Control stations and enclosures

Lift inspection stations
Harmony XALF
Separate components

Bodies for Ø 22 mm control and signaling units with screw clamp terminal connections (1)


Description	For use with	Type of contact		Reference	Weight kg/lb
		NO	NC		
Fixing collar + single contact block with screw clamp terminal connections	Heads for ZB5 pushbuttons	1	–	ZB5AZ101	0.021/0.046
		–	1	ZB5AZ102	0.021/0.046
		2	–	ZB5AZ103	0.030/0.066
		–	2	ZB5AZ104	0.030/0.066
		1	1	ZB5AZ105	0.030/0.066



ZB5AZ101



ZB5AZ102



ZB5AW0B11

Description	For use with	Supply voltage V	Type of contact		Reference	Weight kg/lb
			NO	NC		
Fixing collar + single contact block with screw clamp terminal connections + light block with Universal LED	ZB5AA58	24 ~	1	–	ZB5AW0B11	0.032/0.071



Contact blocks with screw clamp terminal connections

Description	For use with	Sold in lots of	Type of contact		Unit reference	Weight kg/lb
			NO	NC		
Standard single contact blocks (2) (3)	Heads for ZB5 pushbuttons	5	1	–	ZBE101	0.011/0.024
		5	–	1	ZBE102	0.011/0.024



ZBE101

Light blocks with screw clamp terminal connections

Description	Supply voltage V	Sold in lots of	Unit reference	Weight kg/lb
Light blocks with Universal LED (to combine with heads for Universal LED)	24 ~	5	ZBVB1	0.017/0.037
	48...120 ~	5	ZBVG1	0.017/0.037
	230...240 ~	5	ZBVM1	0.017/0.037



ZBVB1



ZB5AZ009

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Body/fixing collar	Standard single contact blocks or light blocks with integral LED	10	ZB5AZ009	0.006/0.013


(1) Can be equipped with additional contact blocks.

(2) The contact blocks enable variable composition of body/contact assemblies. Maximum number of rows possible: 3. Either 3 rows of 3 single contacts or 1 row of 3 double contacts + 1 row of 3 single contacts (double contacts occupy 2 rows).

(3) For use with body/fixing collar ZB5AZ009.




ZBE701



ZBE702



ZBVB17



ZBZ010



ZB5AZ079



ZBZ4005

Contact blocks for printed circuit board connection (1)

Description	Type of contact	For use with	Sold in lots of	Unit reference	Weight kg/lb
Standard contact blocks	 NO 1	Heads for ZB5 pushbuttons	10	ZBE701	0.011/0.024
	 NC -				
	-	Heads for ZB5 pushbuttons	10	ZBE702	0.011/0.024

Light blocks for printed circuit board connection (1)

Description	Supply voltage V	For use with	Color of LED	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	24 ~	ZB5AA58	Orange	5	ZBVB57	0.004/0.009
		ZB5AK1233	Green	5	ZBVB37	0.004/0.009
		ZB5AT8643M	White	5	ZBVB17	0.004/0.009

Adapter (socket) for printed circuit board

For use with	Thickness of printed circuit board mm/in.	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	1.6 ± 0.20/0.06 ± 0.01	10	ZBZ010	0.008/0.018
	3.2 ± 0.2/0.13 ± 0.01	10	ZBZ012	0.008/0.018

Accessories specifically for printed circuit board mounting (1)

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Fixing collar/pillar	Printed circuit board support	10	ZB5AZ079	0.003/0.007
Fixing screw for printed circuit board	Fixing collar/pillar ZB5AZ079	10	ZBZ006	0.011/0.024

Accessory for mushroom head pushbuttons

Description	Color	Unit reference	Weight kg/lb
Plastic guard for Emergency Stop function	Yellow	ZBZ4005	0.011/0.024

(1) For details of panel and printed circuit board cut-outs, please visit our website www.schneider-electric.com. This is to be used in conjunction with adapter (socket) ZBZ010.

X		Z	
XALFK01	6	ZB5AA252	9
XALFK021	7	ZB5AA253	9
XALFK03	7	ZB5AA334	9
XALFK031	7	ZB5AA335	9
XALFK04	7	ZB5AA551	9
XALFK2001E	7	ZB5AA58	9
XALFK3001E	7	ZB5AA651	9
XALFK3002	8	ZB5AD2	9
XALFK3011E	7	ZB5AD5	9
XALFK4003	8	ZB5AG2	9
XALFK4004	8	ZB5AK1233	9
XALFKA2521	6	ZB5AT8643M	9
XALFKA2523	6	ZB5AW0B11	12
XALFKA2525	6	ZB5AZ009	12
XALFKA2531	6	ZB5AZ079	13
XALFKA2533	6	ZB5AZ101	12
XALFKA2535	6	ZB5AZ102	12
XALFKA5511	6	ZB5AZ103	12
XALFKA5513	6	ZB5AZ104	12
XALFKA5515	6	ZB5AZ105	12
XALFKT6442	6	ZB5AZ903	11
XALFKT64421	6	ZB5SZ3	11
XALFKT6444	6	ZBE101	12
XALFKT64441	6	ZBE102	12
XALFKT6445	6	ZBE701	13
XALFKT64451	6	ZBE702	13
XALFKT6445B1	6	ZBVB1	12
XALFKT6445B11	6	ZBVB17	13
XALFKT6445G1	6	ZBVB37	13
XALFKT6445G11	6	ZBVB57	13
XALFKT6445M1	6	ZBVG1	12
XALFKT6445M11	6	ZBVM1	12
XALFP0612	9	ZBZ006	13
XALFP0714	9	ZBZ010	13
XALFP6004E	8	ZBZ012	13
XALFP7005E	8	ZBZ4005	13
XALFZ1	11		
XALFZB2	11		
XALFZE2	11		
XALFZE3	11		
XALFZF8	11		
XALFZS3	11		
XALFZT3	11		
XB5AVB1	10		
XB5AVB3	10		
XB5AVB4	10		
XB5AVB5	10		
XB5AVB6	10		
XB5AVG1	10		
XB5AVG3	10		
XB5AVG4	10		
XB5AVG5	10		
XB5AVG6	10		
XB5AVM1	10		
XB5AVM3	10		
XB5AVM4	10		
XB5AVM5	10		
XB5AVM6	10		
XB7EV03BP	10		
XB7EV03GP	10		
XB7EV03MP	10		
XB7EV04BP	10		
XB7EV04GP	10		
XB7EV04MP	10		
XB7EV05BP	10		
XB7EV05GP	10		
XB7EV05MP	10		
XB7EV06BP	10		
XB7EV06GP	10		
XB7EV06MP	10		
XB7EV07BP	10		
XB7EV07GP	10		
XB7EV07MP	10		
XB7EV08BP	10		
XB7EV08GP	10		
XB7EV08MP	10		

mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

Watch the How-to Videos



Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



Support

- > [Get Quicker Answers Thanks to Online Support](#)



Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is 

Schneider
Electric

Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.


SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On



Learn more about our products at
www.se.com

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA4ED2070703EN
December 2025 - V7.0