




## Introducing the **Easy Series**

Essential automation & control products

*When just enough is just right!*

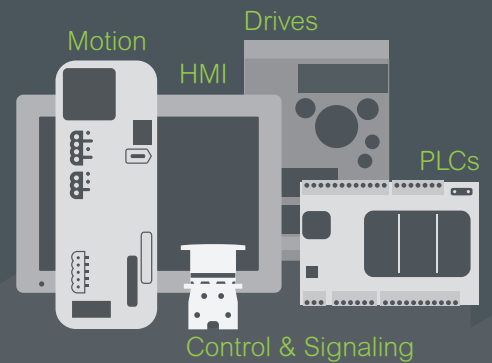

# Easy Harmony XA2

Plastic pushbuttons, switches and pilot lights

Control and signaling units Ø 22


# Quick access to product information

## Get technical information about your product

**References**

**Modicon TM3 I/O expansion modules for Modicon controllers**  
Analog I/O modules


References	Modicon TM3 analog input modules	Input range	Resolution	Input terminal block (T)	Reference	Weight (kg)
2 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI201	0.150	
		16 bits of sign	0.002	TM3AI202	0.150	
4 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	12 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	
4 voltage/current or temperature inputs (I, K, R, S, E, T, N, E, C)	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	
4 differential temperature inputs (I, K, R, S, E, T, N, E, C)	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 bits of	0.001	TM3AI401	0.200	
		11 bits of sign	0.002	TM3AI402	0.200	

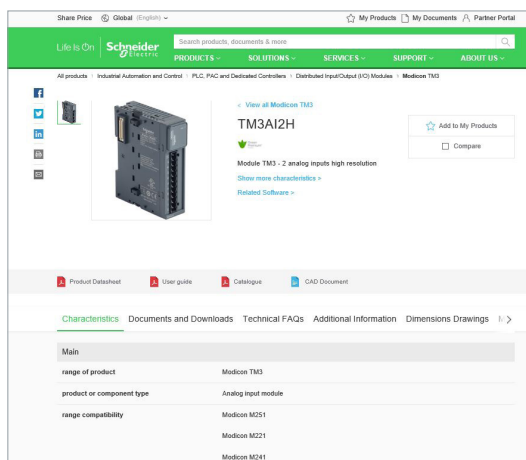


Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

## Find your catalog

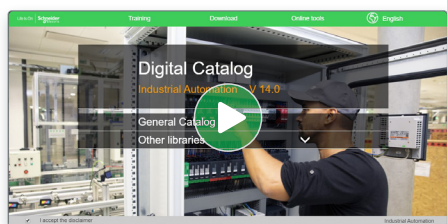

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

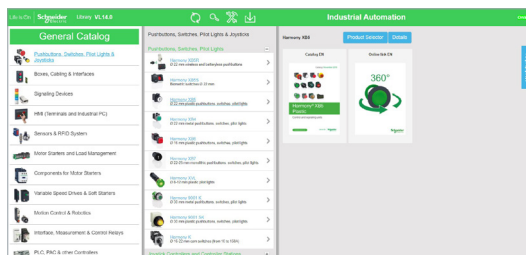


- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

## Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

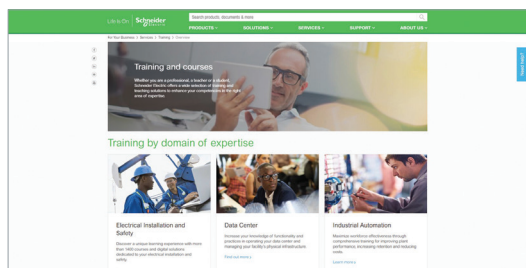

Life Is On

Schneider Electric



# Harmony

## Discover [Harmony](#)

Advanced operator interface and industrial relays

**Harmony** operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. **Harmony** includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

## Explore our offer

- [Harmony](#) Push Buttons and Switches
- [Harmony](#) HMI Operator Terminals, IPC and EdgeBox
- [Harmony](#) Signaling Devices
- [Harmony](#) Electrical Relays
- [Harmony](#) Safety

Life Is 

**Schneider**  
Electric

# General contents

## Easy Harmony XA2

■ <b>General presentation</b> .....	page 2
<b>Selection guide</b> .....	page 4
■ <b>General</b>	
□ Presentation .....	page 8
□ Description .....	page 9
■ <b>References</b>	
□ Spring return pushbuttons .....	page 12
□ Mushroom head pushbuttons, spring return .....	page 12
□ Pushbuttons, push-push.....	page 12
□ Double-headed pushbuttons, spring return.....	page 13
□ Emergency switching off pushbuttons, push-pull and turn to release.....	page 13
□ Selector switches, with standard handle or with long handle.....	page 14
□ Key switches.....	page 14
□ Illuminated pushbuttons, flush push with integral LED .....	page 15
□ Bulbs and associated accessories for illuminated pushbuttons .....	page 16
□ Contact functions for all XA2 pushbuttons and switches .....	page 16
□ Pilot lights with integral LED.....	page 17
□ Indicators with integral LED .....	page 19
□ Empty control stations .....	page 20
■ <b>Product reference index</b> .....	page 22

### Easy Harmony XA2:

- modular, plastic pushbuttons and switches with metallic-look ring,
- complete, plastic pilot lights with integral LED

### Fit for purpose

All the products composing the Easy Harmony XA2 range have been designed to be used in numerous control and signaling applications:

- > customers can easily select the key functions for standard applications
- > their diameter, Ø 22 mm / 0.866 in. makes them suitable for standard OEM and panel builder applications.
- > with plastic material, they provide a solution for industrial applications demanding a high resistance to chemical agents.

### Ease and comfort of choice

The range is available in the form of complete units. It involves:

- > modular, plastic pushbuttons and switches with metallic-look ring  
The modular design allows flexible and simple setup for complete products: the right product can be chosen among various types of heads and 2 types of functions are proposed (contact and signaling)
- > complete pilot lights, provided with integral LED.

All products are fitted with screw clamp terminals allowing fast and easy connection.


### Contact functions

- Pushbuttons with spring return and push-push, marked or unmarked
- Selector switches and key switches, 2 or 3 positions
- Emergency switching off pushbuttons with push-pull and turn to release
- Double-headed pushbuttons with spring return



### Contact and signaling functions

- Illuminated pushbuttons with integral LED, spring return and flush push, metal clip
- Illuminated double-headed pushbuttons with integral LED, spring return



### Signaling functions

- Pilot lights with integral LED
- Indicators with integral LED



### Proven robustness

- > Conforming to most demanding international standards and approvals
- > Tested and certified performance
- > Excellent resistance to mechanical shock and vibration
- > Supports extended temperature range from - 40° C to + 70° C



Helps customer to improve the reliability

## Groomed ergonomics

- > Metallic-look ring on pushbuttons and switches gives a modern look
- > Ergonomic curve on the selector switches allows flexible operation
- > The part of the head that protrudes from the panel is all silver-colored
- > A metal clip connects the head and the contact block

Metallic-look ring



Handle with ergonomic curve




## Easy installation


- > Installation of pushbuttons is simple and easy
- > Mounting by single nut to the control panel
- > Anti-rotation plate prevents the pushbutton head from rotation

Enhances customer convenience during installation

- Single lock ring for mounting on control panel



- Clip-together component system for head, body, contacts, and LED light blocks



## Service and availability

- > Supported by the service of Schneider Electric
- > Wide availability throughout an extensive distribution network

# Control and signaling units Ø 22

Easy Harmony XA2, plastic  
Pushbuttons, switches and pilot lights



Type of products	Contact functions					
	Pushbuttons	Emergency switching off pushbuttons				
						
						
<b>Description of range</b>	<ul style="list-style-type: none"> <li>■ Pushbuttons, spring return: flush push, mushroom head, and push-push</li> <li>■ Emergency switching off pushbuttons: turn to release and push-pull</li> </ul>					
<b>Features</b>	<table border="1"> <tr> <td>Products</td> <td>Complete units</td> </tr> <tr> <td>Shape of head</td> <td>Circular</td> </tr> </table>		Products	Complete units	Shape of head	Circular
Products	Complete units					
Shape of head	Circular					
<b>Drilling or cut-out for mounting</b>	Ø 22 mm/0.866 in.					
<b>Degree of protection</b>	IP65 conforming to standard IEC 60529					
<b>International standards</b>	IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-2023, GB/T 14048.5-2017					
<b>Product certification</b>	CCC, UKCA, CE					
<b>Cabling</b>	Screw clamp terminal connections					
<b>Mounting</b>	<table border="1"> <tr> <td>Panel thickness</td> <td>Ø 1 to 5 mm/ 0.04 to 0.197 in.</td> </tr> </table>		Panel thickness	Ø 1 to 5 mm/ 0.04 to 0.197 in.		
Panel thickness	Ø 1 to 5 mm/ 0.04 to 0.197 in.					
<b>Type references</b>	<b>XA2AA●●, XA2AA●●●●, XA2AC●●, and XA2AH0●●</b>	<b>XA2AT42 and XA2AS●42</b>				
<b>Pages</b>	12	13				

Contact functions					
Selector and key switches	Double-headed pushbutton				
					
					
					
<b>Description of range</b>	<ul style="list-style-type: none"> <li>■ Selector switches, 2 or 3-position: standard or long handle</li> <li>■ Key switches</li> </ul>				
<b>Features</b>	<table border="1"> <tr> <td>Products</td> <td>Complete units</td> </tr> <tr> <td>Shape of head</td> <td>Circular</td> </tr> </table>	Products	Complete units	Shape of head	Circular
Products	Complete units				
Shape of head	Circular				
<b>Drilling or cut-out for mounting</b>	Ø 22 mm/0.866 in.				
<b>Degree of protection</b>	IP54 conforming to standard IEC 60529 Selector switches: IP65 Key switches: IP54				
<b>International standards</b>	IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-2023, GB/T 14048.5-2017				
<b>Product certification</b>	CCC, UKCA, CE				
<b>Cabling</b>	Screw clamp terminal connections				
<b>Mounting</b>	<table border="1"> <tr> <td>Panel thickness</td> <td>Ø 1 to 5 mm/ 0.04 to 0.197 in.</td> </tr> </table>	Panel thickness	Ø 1 to 5 mm/ 0.04 to 0.197 in.		
Panel thickness	Ø 1 to 5 mm/ 0.04 to 0.197 in.				
<b>Type references</b>	<b>XA2AD●●, XA2AJ●●, and XA2AG●●</b>				
<b>Pages</b>	14				

## Control and signaling units Ø 22

Easy Harmony XA2, plastic  
Pushbuttons, switches and pilot lights

Type of products		Contact and signaling functions	
		Illuminated pushbutton	Illuminated double-headed pushbuttons
			
Description of range		■ Illuminated pushbuttons with integral LED, spring return: flush push	■ Illuminated double-headed pushbuttons with integral LED, spring return
Features	Products	Complete units	
	Shape of head	Circular	Rectangular
Drilling or cut-out for mounting	Ø 22 mm/0.866 in.		
Degree of protection	IP65 conforming to standard IEC 60529	IP40 conforming to standard IEC 60529	
International standards	IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-2023, GB/T 14048.5-2017		
Product certification	CCC, UKCA, CE		
Cabling	Screw clamp terminal connections		
Mounting	Panel thickness	Ø 1 to 5 mm/0.04 to 0.197 in.	
Type references	XA2AW3●B1, XA2AW3●M1, and XA2AW3●Q1		XA2EW7L3741B5 and XA2EW7L3741M5
Pages	15		13

Signaling functions	
Pilot lights	Indicators
	
Description of range	
■ Pilot lights with integral LED	
■ Indicators with integral LED	
Features	
Products	
Complete units	
Shape of head	
Circular	
Drilling or cut-out for mounting	
Ø 22 mm/0.866 in.	
Degree of protection	
IP65 conforming to standard IEC 60529	
IP54 conforming to standard IEC 60529	
International standards	
IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-2023, GB/14048.5-2017	
Product certification	
CCC, CE	
Cabling	
Screw clamp terminal connections	
Mounting	
Panel thickness	
Ø 1 to 6 mm/0.04 to 0.24 in.	
Type references	
XA2EV●●LC, XA2EVM●LC and XA2EVM●●LC	
XA2EV●34●PC	
Pages	
17 and 18	
19	

# Control and signaling units Ø 22

## Easy Harmony XA2, plastic

### Pushbuttons, switches and pilot lights

#### Presentation

The Easy Harmony XA2 range of Ø 22/0.866 in. plastic control and signaling units combines simplicity of installation, flexibility and robustness. It meets the requirements of the majority of industrial applications. The metallic-look ring design on the pushbuttons and switches gives them a modern look. These products are available in the form of complete units.

■ This range includes:

- Contact functions: pushbuttons, selector/key switches, Emergency switching off pushbuttons, and double-headed pushbuttons designed for parameter settings, adjustments, and start/stop control of machines and installations
- Contact and signaling functions: illuminated pushbuttons and double-headed illuminated pushbuttons designed for control and signaling functions
- Signaling functions: pilot lights and indicators designed for visual signaling.

■ The pushbutton, switch control (illuminated and non-illuminated), and pilot light offer is both broad and comprehensive:

- Pushbuttons, spring return with flush push, marked or unmarked, or mushroom head
- Emergency stop pushbuttons Ø 40/1.575 in., Ø 30/1.181 in., and Ø 60/2.362 in. with 2 types of head: push-pull and turn to release
- Pilot lights, indicators, and illuminated pushbuttons with integral LED
- Selector switches with different types of operator: standard handle, long handle, or key
- Choice of heads: circular and double-head
- Connection type: screw clamp connector
- Various accessories

#### Installation

■ Easy Harmony XA2 products are both simple and quick to install:

- Mounting by a single nut to the control panel,
- Body/fixing collar simply clip on the head.

#### Environment

The performance features of the Easy Harmony XA2 range meets the following specifications:

■ Degrees of protection conforming to standard IEC 60529:

- IP65 for pushbuttons, Emergency switching off pushbuttons, illuminated pushbuttons, and pilot lights
- IP54 for key selector switch and indicators
- IP40 for double-headed pushbuttons







■ International standards:

- IEC 60947-5-1, EN 60947-5-1, GB/T 14048.1-2023, GB/T 14048.5-2017

■ Product certification:

- CCC, CE

For more technical information, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

Complete units		Contact functions		
				
<b>Pushbuttons, spring return</b>	Type of push	Flush push, unmarked	Flush push, marked	Mushroom head
	Degree of protection	IP65	IP65	IP65
	Color	White, Black, Green, Yellow, Blue, and Red	Green, Black, White, Red, and Blue	Black, Green, Red, and Yellow
	References	<b>XA2AA●●</b>	<b>XA2AA33●1, XA2AA43●2, and XA2AA6511</b>	<b>XA2AC●1 and XA2AC42</b>
	Pages	<a href="#">12</a>	<a href="#">12</a>	<a href="#">12</a>
				
<b>Pushbuttons, push-push</b>	Type of push	Flush push, unmarked		
	Degree of protection	IP65		
	Color	Black, Green, Yellow, Red, and Blue		
	References	<b>XA2AH0●1</b>		
	Page	<a href="#">12</a>		
				
<b>Double-headed pushbuttons, spring return</b>	Type of push	Flush push		
	Degree of protection	IP40		
	Color	Green and Red		
	References	<b>XA2EA7A3415</b>		
	Page	<a href="#">13</a>		
				
<b>Emergency switching off pushbuttons</b>	Type of push	Turn to release and push-pull (Ø 30 mm/1.181 in., Ø 40 mm/1.575 in., Ø 60 mm/1.362 in.)		
	Degree of protection	IP65		
	Color	Red		
	References	<b>XA2AT42 and XA2AS●42</b>		
	Page	<a href="#">13</a>		

## Complete units (continued)

## Contact functions



Selector switches and key switches	Type of push	Standard handle, 2 or 3 positions	Long handle, 2 or 3 positions	Key, 2 or 3 positions
	Degree of protection	IP65	IP65	IP54
	References	<b>XA2AD●●</b>	<b>XA2AJ●●</b>	<b>XA2AG21 and XA2AG●3</b>
	Page	14		

## Contact and signaling functions



Illuminated pushbuttons, spring return	Type of push	Flush push
	Degree of protection	IP65
	LED	Integral LEDs 24 V, 220...230 V, or 380...400 V
	Color	White, Green, Red, Yellow, and Blue
	Reference	<b>XA2AW3●B1, XA2AW3●M1, XA2AW34●2, XA2AW31Q1, and XA2AW34Q2</b>
	Page	15



Double-headed pushbuttons, spring return with pilot light block	Type of push	Flush push
	Degree of protection	IP40
	LED	Integral LEDs 24 V or 220...230 V
	Color	Red and Green
	References	<b>XA2EW7L3741B5 and XA2EW7L3741M5</b>
	Page	13

**Complete units** (continued)

**Signaling functions**



<b>Pilot lights</b>	<b>Degree of protection</b>	IP65
	<b>LED</b>	Integral LEDs 12 V, 24 V, 30 V, 48 V, 60...63.5 V, 110 V, 220...230 V, and 380...400 V
	<b>Color</b>	White, Green, Red, Amber, Blue, Yellow, and Bi-color (Green/Red)
	<b>References</b>	<b>XA2EV●●LC, XA2EV●●●LC, XA2EVB34LC, and XA2EVM34LC</b>
	<b>Pages</b>	<a href="#">17</a> and <a href="#">18</a>



<b>Indicators</b>	<b>Degree of protection</b>	IP54
	<b>LED</b>	Integral LEDs 110 V, 220...230 V, and 380...400 V
	<b>Color</b>	Red and Green
	<b>References</b>	<b>XA2EV●34●PC</b>
	<b>Page</b>	<a href="#">19</a>

# Control and signaling units Ø 22

Easy Harmony XA2, plastic

Spring return pushbuttons, marked and unmarked

Mushroom head pushbuttons, spring return



XA2AA35



XA2AA51



XA2AA3311



XA2AA4342



XA2AC31



XA2AH021

## Spring return pushbuttons with flush push

Shape of head	Type of contacts		Color of push	Marking	Reference	Weight kg/lb
	NO	NC				
<b>Unmarked</b>						
	1	–	White	–	<a href="#">XA2AA11</a>	0.033/0.073
	1	–	Black	–	<a href="#">XA2AA21</a>	0.033/0.073
	1	1	Black	–	<a href="#">XA2AA25</a>	0.046/0.101
	1	–	Green	–	<a href="#">XA2AA31</a>	0.033/0.073
	1	1	Green	–	<a href="#">XA2AA35</a>	0.046/0.101
	1	–	Yellow	–	<a href="#">XA2AA51</a>	0.033/0.073
	1	–	Blue	–	<a href="#">XA2AA61</a>	0.033/0.073
	1	–	Red	–	<a href="#">XA2AA41</a>	0.033/0.073
	–	1	Red	–	<a href="#">XA2AA42</a>	0.033/0.073
	1	1	Red	–	<a href="#">XA2AA45</a>	0.046/0.101

<b>Marked</b>						
	1	–	Green	"I"	<a href="#">XA2AA3311</a>	0.032/0.071
	1	–	Black	"↑"	<a href="#">XA2AA3351</a>	0.032/0.071
	1	–	White	"↑"	<a href="#">XA2AA3341</a>	0.032/0.071
	–	1	Red	"O"	<a href="#">XA2AA4322</a>	0.032/0.071
	–	1	Red	"STOP"	<a href="#">XA2AA4342</a>	0.032/0.071
	1	–	Blue	"↕"	<a href="#">XA2AA6511</a>	0.032/0.071

## Mushroom head pushbuttons, spring return


Shape of head	Type of contacts		Color of push	Diameter Ø (mm)/in.	Reference	Weight kg/lb
	NO	NC				
	1	–	Black	40/1.575	<a href="#">XA2AC21</a>	0.047/0.104
	1	–	Green	40/1.575	<a href="#">XA2AC31</a>	0.047/0.104
	1	–	Yellow	40/1.575	<a href="#">XA2AC51</a>	0.047/0.104
	–	1	Red	40/1.575	<a href="#">XA2AC42</a>	0.047/0.104

## Pushbuttons, push-push with flush push

Shape of head	Type of contacts		Color of push	Reference	Weight kg/lb
	NO	NC			
<b>Complete unit</b>					
	1	–	Black	<a href="#">XA2AH021</a>	0.036/0.088
	1	–	Green	<a href="#">XA2AH031</a>	0.036/0.088
	–	1	Red	<a href="#">XA2AH042</a>	0.036/0.088
	1	–	Yellow	<a href="#">XA2AH051</a>	0.036/0.088
	1	–	Blue	<a href="#">XA2AH061</a>	0.036/0.088

# Control and signaling units Ø 22


Easy Harmony XA2, plastic  
 Double-headed pushbuttons, spring return  
 Emergency switching off pushbuttons



XA2EA7A3415

Double-headed pushbuttons, spring return							
Shape of head	Description	Type of contacts		Caps (1)		Reference	Weight kg/lb
		NO	NC	Marking	Background color		

Complete unit							
	1 flush push, green	1	1	"I"	Green	<a href="#">XA2EA7A3415</a>	0.048/0.106
	1 flush push, red			"O"	Red		



XA2EW7L3741●5

Double-headed pushbuttons with 1 white central pilot light block								
Shape of head	Description	Type of contacts		Caps (1)		Pilot light Voltage V	Reference	Weight kg/lb
		NO	NC	Marking	Background color			

Complete units								
	1 flush push, green	1	1	"I"	Green	24 ~	<a href="#">XA2EW7L3741B5</a>	0.072/0.159
	1 flush push, red			"O"	Red			
	1 central pilot light block, white							
						220...230 ~	<a href="#">XA2EW7L3741M5</a>	0.072/0.159



XA2AT42

Emergency switching off pushbuttons						
Shape of head	Type of push	Type of contacts	Diameter Ø (mm)/in.		Reference	Weight kg/lb

	Push-pull	NC	1	40/1.575	<a href="#">XA2AT42</a>	0.057/0.126
	Turn to release		1	30/1.181	<a href="#">XA2AS442</a>	0.048/0.106
				40/1.575	<a href="#">XA2AS542</a>	0.058/0.128
				60/2.362	<a href="#">XA2AS642</a>	0.068/0.150



XA2AS542

**Note:** For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.  
 (1) These caps are factory assembled and cannot be removed (risk of damage).

## Control and signaling units Ø 22

Easy Harmony XA2, plastic

Selector switches, with standard or long handle

Key switches



XA2AD33



XA2AJ33



XA2AG03

## Selector switches, with standard handle or with long handle

Shape of head	Type of push	Type of contacts		Number and type of positions	Reference	Weight kg/lb
		NO	NC			
	Standard handle	1	–	2 - stay put	<a href="#">XA2AD21</a>	0.041/0.090
		–	1	2 - stay put	<a href="#">XA2AD22</a>	0.042/0.093
		1	1	2 - stay put	<a href="#">XA2AD25</a>	0.055/0.121
		2	–	3 - stay put	<a href="#">XA2AD33</a>	0.054/0.119
		2	–	3 - spring return from 2 sides	<a href="#">XA2AD53</a>	0.054/0.119
	1	–	2 - spring return	<a href="#">XA2AD41</a>	0.041/0.090	
	Long handle	1	–	2 - stay put	<a href="#">XA2AJ21</a>	0.043/0.095
		1	1	2 - stay put	<a href="#">XA2AJ25</a>	0.057/0.126
		2	–	3 - stay put	<a href="#">XA2AJ33</a>	0.056/0.123
		2	–	3 - spring return from 2 sides	<a href="#">XA2AJ53</a>	0.056/0.123

## Key switches

Shape of head	Type of push	Type of contacts		Number and type of positions	Reference	Weight kg/lb
		NO	NC			
	Key	1	–	2 - stay put, one side pull-out	<a href="#">XA2AG21</a>	0.063/0.139
		2	–	2 - stay put, two sides pull-out	<a href="#">XA2AG43</a>	0.076/0.168
		2	–	2 - spring return, one side pull-out	<a href="#">XA2AG63</a>	0.076/0.168
		2	–	3 - spring return from 2 sides, middle pull-out	<a href="#">XA2AG73</a>	0.076/0.168
		2	–	3 - stay put, middle pull-out	<a href="#">XA2AG33</a>	0.076/0.168
		2	–	3 - stay put, 3 sides pull-out	<a href="#">XA2AG03</a>	0.076/0.168

**Note:** For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.



XA2AW31B1



XA2AW36B1




XA2AW33M1



XA2AW35M1



XA2AW34Q2

Illuminated pushbuttons with integral LED							
Shape of head	Type of push	Supply voltage V	Type of contacts		Color	Reference	Weight kg/lb
			NO	NC			
	Flush push	24 ~	1	-	White	<a href="#">XA2AW31B1</a>	0.043/0.095
					Green	<a href="#">XA2AW33B1</a>	0.043/0.095
					Red	<a href="#">XA2AW34B1</a>	0.043/0.095
					Yellow	<a href="#">XA2AW35B1</a>	0.043/0.095
					Blue	<a href="#">XA2AW36B1</a>	0.043/0.095
			-	1	Red	<a href="#">XA2AW34B2</a>	0.052/0.115
		220-230 ~	1	-	White	<a href="#">XA2AW31M1</a>	0.043/0.095
					Green	<a href="#">XA2AW33M1</a>	0.043/0.095
					Red	<a href="#">XA2AW34M1</a>	0.043/0.095
					Yellow	<a href="#">XA2AW35M1</a>	0.043/0.095
					Blue	<a href="#">XA2AW36M1</a>	0.043/0.095
			-	1	Red	<a href="#">XA2AW34M2</a>	0.052/0.115
		380-400 ~	1	-	White	<a href="#">XA2AW31Q1</a>	0.043/0.095
					Red	<a href="#">XA2AW34Q2</a>	0.052/0.115

**Note:** For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

# Control and signaling units Ø 22

Easy Harmony XA2, plastic  
Illuminated pushbuttons with flush push

Bulbs for illuminated pushbuttons


Contact functions for all XA2 pushbuttons and switches



DL1-LED243



DL1-LED2204



ZB5AZ905



ZB5AZ902



ZA2EE102

### Bulbs with BA9s base fitting and associated accessories

Description	Supply voltage V	Color	Sold in lots of	Unit reference	Weight kg/lb
LEDs	24 ~	White	10	DL1-LED241	0.002/0.004
		Green	10	DL1-LED243	0.002/0.004
		Red	10	DL1-LED244	0.002/0.004
		Yellow	10	DL1-LED245	0.002/0.004
		Blue	10	DL1-LED246	0.002/0.004
	220 ~	White	1	DL1-LED2201	0.002/0.004
		Green	1	DL1-LED2203	0.002/0.004
		Red	1	DL1-LED2204	0.002/0.004
		Yellow	1	DL1-LED2205	0.002/0.004
		Blue	1	DL1-LED2206	0.002/0.004

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Bezel tool	Tightening head fixing nut	1	ZB5AZ905	0.016/0.035
Anti-rotation plate	Prevents head from rotation	10	ZB5AZ902	0.008/0.018

### Contact functions (for all XA2 pushbuttons and switches)

#### Screw clamp terminal connections

Description	To be used with	Type of contacts		Sold in lots of	Unit reference	Weight kg/lb
		NO	NC			
Contact blocks	All XA2 pushbuttons and switches	1	-	1	ZA2EE101	0.014/0.031
		-	1	1	ZA2EE102	0.014/0.031

# Control and signaling units Ø 22

## Easy Harmony XA2, plastic

### Pilot lights with integral LED

XA2E\_CP20053\_2



XA2EVJ3LC

XA2E\_CP20056\_2



XA2EVC6LC

XA2E\_CP20054\_2



XA2EVVE4LC

#### Pilot lights with integral LED, screw clamp terminal connection

Shape of head	Supply voltage V	Color of lens	Sold in lots of	Reference	Weight kg/lb
●	12 ~	White	10	<a href="#">XA2EVJ1LC</a>	0.019/0.041
		Green	10	<a href="#">XA2EVJ3LC</a>	0.019/0.041
		Red	10	<a href="#">XA2EVJ4LC</a>	0.019/0.041
		Amber	10	<a href="#">XA2EVJ5LC</a>	0.019/0.041
		Blue	10	<a href="#">XA2EVJ6LC</a>	0.019/0.041
		Yellow	10	<a href="#">XA2EVJ8LC</a>	0.019/0.041
	24 ~	White	10	<a href="#">XA2EVB1LC</a>	0.019/0.041
		Green	10	<a href="#">XA2EVB3LC</a>	0.019/0.041
		Red	10	<a href="#">XA2EVB4LC</a>	0.019/0.041
		Amber	10	<a href="#">XA2EVB5LC</a>	0.019/0.041
		Blue	10	<a href="#">XA2EVB6LC</a>	0.019/0.041
		Yellow	10	<a href="#">XA2EVB8LC</a>	0.019/0.041
	30 ~	White	10	<a href="#">XA2EVC1LC</a>	0.019/0.041
		Green	10	<a href="#">XA2EVC3LC</a>	0.019/0.041
		Red	10	<a href="#">XA2EVC4LC</a>	0.019/0.041
		Amber	10	<a href="#">XA2EVC5LC</a>	0.019/0.041
		Blue	10	<a href="#">XA2EVC6LC</a>	0.019/0.041
		Yellow	10	<a href="#">XA2EVC8LC</a>	0.019/0.041
48 ~	White	10	<a href="#">XA2EVE1LC</a>	0.019/0.041	
	Green	10	<a href="#">XA2EVE3LC</a>	0.019/0.041	
	Red	10	<a href="#">XA2EVE4LC</a>	0.019/0.041	
	Amber	10	<a href="#">XA2EVE5LC</a>	0.019/0.041	
	Blue	10	<a href="#">XA2EVE6LC</a>	0.019/0.041	
	Yellow	10	<a href="#">XA2EVE8LC</a>	0.019/0.041	
60...63.5 ~	White	10	<a href="#">XA2EVVEE1LC</a>	0.019/0.041	
	Green	10	<a href="#">XA2EVVEE3LC</a>	0.019/0.041	
	Red	10	<a href="#">XA2EVVEE4LC</a>	0.019/0.041	
	Amber	10	<a href="#">XA2EVVEE5LC</a>	0.019/0.041	
	Blue	10	<a href="#">XA2EVVEE6LC</a>	0.019/0.041	
	Yellow	10	<a href="#">XA2EVVEE8LC</a>	0.019/0.041	

**Note:** For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

# Control and signaling units Ø 22

## Easy Harmony XA2, plastic

### Pilot lights with integral LED

XA2E\_CP20053\_2



XA2EVF3LC

Pilot lights with integral LED, screw clamp terminal connection (continued)					
Shape of head	Supply voltage V	Color of lens	Sold in lots of	Reference	Weight kg/lb
●	110 ~	White	10	<a href="#">XA2EVF1LC</a>	0.019/0.041
		Green	10	<a href="#">XA2EVF3LC</a>	0.019/0.041
		Red	10	<a href="#">XA2EVF4LC</a>	0.019/0.041
		Amber	10	<a href="#">XA2EVF5LC</a>	0.019/0.041
		Blue	10	<a href="#">XA2EVF6LC</a>	0.019/0.041
		Yellow	10	<a href="#">XA2EVF8LC</a>	0.019/0.041
	220 ---	White	10	<a href="#">XA2EVMD1LC</a>	0.019/0.041
		Green	10	<a href="#">XA2EVMD3LC</a>	0.019/0.041
		Red	10	<a href="#">XA2EVMD4LC</a>	0.019/0.041
		Amber	10	<a href="#">XA2EVMD5LC</a>	0.019/0.041
		Blue	10	<a href="#">XA2EVMD6LC</a>	0.019/0.041
		Yellow	10	<a href="#">XA2EVMD8LC</a>	0.019/0.041
220-230 ~	White	10	<a href="#">XA2EVM1LC</a>	0.019/0.041	
	Green	10	<a href="#">XA2EVM3LC</a>	0.019/0.041	
	Red	10	<a href="#">XA2EVM4LC</a>	0.019/0.041	
	Amber	10	<a href="#">XA2EVM5LC</a>	0.019/0.041	
	Blue	10	<a href="#">XA2EVM6LC</a>	0.019/0.041	
	Yellow	10	<a href="#">XA2EVM8LC</a>	0.019/0.041	
	Green/Red	5	<a href="#">XA2EVM34LC</a>	0.022/0.049	
380...400 ~	White	10	<a href="#">XA2EVQ1LC</a>	0.019/0.041	
	Green	10	<a href="#">XA2EVQ3LC</a>	0.019/0.041	
	Red	10	<a href="#">XA2EVQ4LC</a>	0.019/0.041	
	Amber	10	<a href="#">XA2EVQ5LC</a>	0.019/0.041	
	Blue	10	<a href="#">XA2EVQ6LC</a>	0.019/0.041	
	Yellow	10	<a href="#">XA2EVQ8LC</a>	0.019/0.041	

XA2E\_CP20055\_2



XA2EVM5LC

XA2E\_CP20057\_2



XA2EVQ8LC

**Note:** For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

# Control and signaling units Ø 22

## Easy Harmony XA2, plastic

### Indicators with integral LED



XA2EVF34SPC






XA2EVF34BPC



XA2EVF34GPC

#### Indicators with integral LED, screw clamp terminal connection

Shape of head	Indicator type	Supply voltage V	Color of lens	Sold in lots of	Reference	Weight kg/lb
	Isolation switch	110 ~	Green/Red	5	<a href="#">XA2EVF34SPC</a>	0.027/0.058
		220...230 ~	Green/Red	5	<a href="#">XA2EVM34SPC</a>	0.027/0.058
		380...400 ~	Green/Red	5	<a href="#">XA2EVQ34SPC</a>	0.027/0.058
	Circuit breaker	110 ~	Green/Red	5	<a href="#">XA2EVF34BPC</a>	0.027/0.058
		220...230 ~	Green/Red	5	<a href="#">XA2EVM34BPC</a>	0.027/0.058
		380...400 ~	Green/Red	5	<a href="#">XA2EVQ34BPC</a>	0.027/0.058
	Ground	110 ~	Green/Red	5	<a href="#">XA2EVF34GPC</a>	0.027/0.058
		220...230 ~	Green/Red	5	<a href="#">XA2EVM34GPC</a>	0.027/0.058
		380...400 ~	Green/Red	5	<a href="#">XA2EVQ34GPC</a>	0.027/0.058





**Note:** For information on dimensions, please refer to the Schneider Electric website, Easy Harmony XA2 offer.

# Control and signaling units Ø 22

## Easy Harmony XA2, plastic

Empty control stations for XA2 pushbuttons, switches, and pilot lights




### Empty control stations

Description	Level of protection (1)	Dimensions w x h x d mm/in.	Number of cut-outs	Reference	Weight kg/lb
 <p><b>Plastic</b> <b>Light gray cover</b> <b>Dark gray base</b> Single row of contacts Non-illuminated functions and Ø 40 mm/Ø 1.575 in. mushroom heads</p> <p>XALB015C</p>	IP65	75 x 75 x 50/ 2.96 x 2.96 x 1.97	1	<a href="#">XALB015C</a>	0.102/0.225
 <p>XALB025C</p>		75 x 118 x 50/ 2.96 x 4.65 x 1.97	2	<a href="#">XALB025C</a>	0.132/0.292
 <p>XALB035C</p>		75 x 174 x 50/ 2.96 x 6.85 x 1.97	3	<a href="#">XALB035C</a>	0.179/0.395
 <p><b>Plastic</b> <b>Yellow cover</b> <b>Dark gray base</b> Single row of contacts Non-illuminated functions and Ø 40 mm/Ø 1.575 in. mushroom heads</p> <p>XALB015YC</p>	IP65	75 x 75 x 50/ 2.96 x 2.96 x 1.97	1	<a href="#">XALB015YC</a>	0.102/0.225

(1) The control station achieves an IP65 rating when used with IP65 rated pushbuttons and cabling accessories.

# Control and signaling units Ø 22

Easy Harmony XA2, plastic  
Empty control stations for XA2 pushbuttons, switches,  
and pilot lights

Empty control stations (continued)					
Description	Level of protection (1)	Dimensions w x h x d mm/in.	Number of cut-outs	Reference	Weight kg/lb
 <p><b>Plastic</b> <b>Light gray cover</b> <b>Dark gray base</b> for illuminated functions, mushroom heads or double-row contact blocks</p>	IP65	75 x 75 x 70/ 2.96 x 2.96 x 2.76	1	<a href="#">XALB017C</a>	0.129/0.285
		75 x 118 x 70/ 2.96 x 4.65 x 2.76	2	<a href="#">XALB027C</a>	0.159/0.351
	IP65	75 x 174 x 70/ 2.96 x 6.85 x 2.76	3	<a href="#">XALB037C</a>	0.214/0.472
		75 x 75 x 70/ 2.96 x 2.96 x 2.76	1	<a href="#">XALB017YC</a>	0.129/0.285
	IP65	75 x 75 x 70/ 2.96 x 2.96 x 2.76	1	<a href="#">XALB017YC</a>	0.129/0.285
		75 x 75 x 70/ 2.96 x 2.96 x 2.76	1	<a href="#">XALB017YC</a>	0.129/0.285

(1) The control station achieves an IP65 rating when used with IP65 rated pushbuttons and cabling accessories.

XALB017\_CCP200224

XALB017C

XALB027\_CCP200224

XALB027C

XALB037\_CCP200224

XALB037C

XALB017\_CCP200224

XALB017YC

<b>D</b>			
DL1-LED2201	16	XA2AW34B2	15
DL1-LED2203	16	XA2AW34M1	15
DL1-LED2204	16	XA2AW34M2	15
DL1-LED2205	16	XA2AW34Q2	15
DL1-LED2206	16	XA2AW35B1	15
DL1-LED241	16	XA2AW35M1	15
DL1-LED243	16	XA2AW36B1	15
DL1-LED244	16	XA2AW36M1	15
DL1-LED245	16	XA2EA7A3415	13
DL1-LED246	16	XA2EVB1LC	17
		XA2EVB34LC	17
		XA2EVB3LC	17
		XA2EVB4LC	17
		XA2EVB5LC	17
		XA2EVB6LC	17
		XA2EVB8LC	17
		XA2EVC1LC	17
		XA2EVC3LC	17
		XA2EVC4LC	17
		XA2EVC5LC	17
		XA2EVC6LC	17
		XA2EVC8LC	17
		XA2EVE1LC	17
		XA2EVE3LC	17
		XA2EVE4LC	17
		XA2EVE5LC	17
		XA2EVE6LC	17
		XA2EVE8LC	17
		XA2EVEE1LC	17
		XA2EVEE3LC	17
		XA2EVEE4LC	17
		XA2EVEE5LC	17
		XA2EVEE6LC	17
		XA2EVEE8LC	17
		XA2EVF1LC	18
		XA2EVF34BPC	19
		XA2EVF34GPC	19
		XA2EVF34SPC	19
		XA2EVF3LC	18
		XA2EVF4LC	18
		XA2EVF5LC	18
		XA2EVF6LC	18
		XA2EVF8LC	18
		XA2EVJ1LC	17
		XA2EVJ3LC	17
		XA2EVJ4LC	17
		XA2EVJ5LC	17
		XA2EVJ6LC	17
		XA2EVJ8LC	17
		XA2EVM1LC	18
		XA2EVM34BPC	19
		XA2EVM34GPC	19
		XA2EVM34LC	18
		XA2EVM34SPC	19
		XA2EVM3LC	18
		XA2EVM4LC	18
		XA2EVM5LC	18
		XA2EVM6LC	18
		XA2EVM8LC	18
		XA2EVMD1LC	18
		XA2EVMD3LC	18
		XA2EVMD4LC	18
		XA2EVMD5LC	18
		XA2EVMD6LC	18
		XA2EVMD8LC	18
		XA2EVQ1LC	18
		XA2EVQ34BPC	19
		XA2EVQ34GPC	19
		XA2EVQ34SPC	19
		XA2EVQ3LC	18
		XA2EVQ4LC	18
		XA2EVQ5LC	18
		XA2EVQ6LC	18
		XA2EVQ8LC	18
		XA2EW7L3741B5	13
		XA2EW7L3741M5	13
		XALB015C	20
		XALB015YC	20
		XALB017C	21
		XALB017YC	21
		XALB025C	20
		XALB027C	21
		XALB035C	20
		XALB037C	21
		ZA2EE101	16
		ZA2EE102	16
		ZB5AZ902	16
		ZB5AZ905	16
<b>X</b>			
XA2AA11	12		
XA2AA21	12		
XA2AA25	12		
XA2AA31	12		
XA2AA3311	12		
XA2AA3341	12		
XA2AA3351	12		
XA2AA35	12		
XA2AA41	12		
XA2AA42	12		
XA2AA4322	12		
XA2AA4342	12		
XA2AA45	12		
XA2AA51	12		
XA2AA61	12		
XA2AA6511	12		
XA2AC21	12		
XA2AC31	12		
XA2AC42	12		
XA2AC51	12		
XA2AD21	14		
XA2AD22	14		
XA2AD25	14		
XA2AD33	14		
XA2AD41	14		
XA2AD53	14		
XA2AG03	14		
XA2AG21	14		
XA2AG33	14		
XA2AG43	14		
XA2AG63	14		
XA2AG73	14		
XA2AH021	12		
XA2AH031	12		
XA2AH042	12		
XA2AH051	12		
XA2AH061	12		
XA2AJ21	14		
XA2AJ25	14		
XA2AJ33	14		
XA2AJ53	14		
XA2AS442	13		
XA2AS542	13		
XA2AS642	13		
XA2AT42	13		
XA2AW31B1	15		
XA2AW31M1	15		
XA2AW31Q1	15		
XA2AW33B1	15		
XA2AW33M1	15		
XA2AW34B1	15		

# mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

## Watch the How-to Videos



### Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




### Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



### Support

- > [Get Quicker Answers Thanks to Online Support](#)

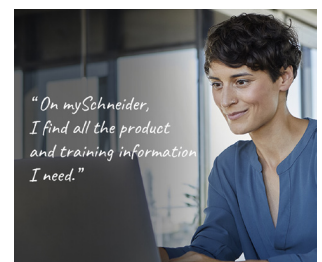

### Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is 

**Schneider**  
Electric

# Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.


SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On



Learn more about our products at  
[www.se.com](http://www.se.com)

Design: Schneider Electric  
Photos: Schneider Electric

**Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier - CS 30323  
F-92500 Rueil-Malmaison Cedex  
France

DIA5ED2140104EN  
May 2025 - V9.0