

# Product Environmental Profile

## E FORMAT WALL BOX






## General information

Representative product	E FORMAT WALL BOX - E157E
Description of the product	It is to indicate wall outlet boxes for the enclosure of electrical accessories.
Functional unit	Connect a workstation remote from the wall to the energy and communication networks for 20 years, via 4x2P wiring accessories.



## Constituent materials

Reference product mass 135 g including the product, its packaging and additional elements and accessories

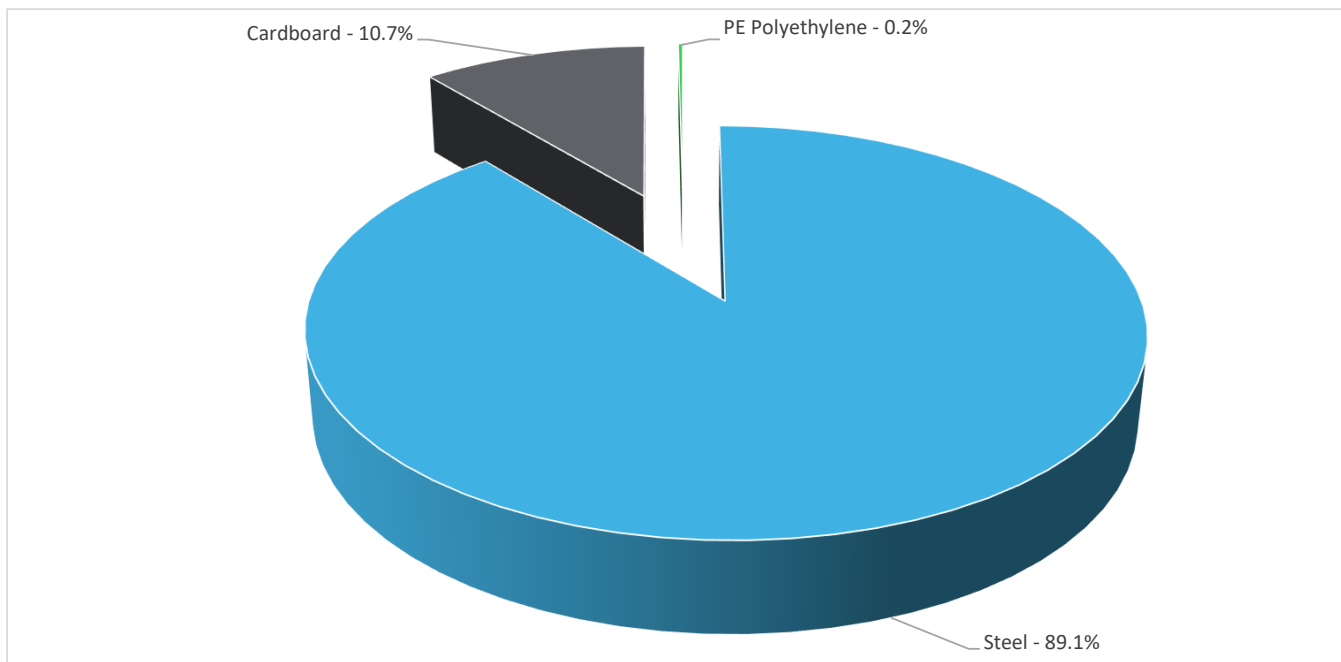

Plastics	0.2%
Metals	89.1%
Others	10.7%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The E FORMAT WALL BOX presents the following relevant environmental aspects


<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 14.8 g, consisting of Cardboard(97.8%), PE film(2.2%)
<b>Installation</b>	Reference E157E does not require any installation operations. Packaging waste is considered in installation.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.  Recyclability potential: <b>94%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Installation elements</b>	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
<b>Use scenario</b>	The product has no energy consumption. It don't consider load rate, and use rate is 100% of RLT.			
<b>Geographical representativeness</b>	Egypt			
<b>Technological representativeness</b>	It is to indicate wall outlet boxes for the enclosure of electrical accessories.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; EG	Electricity mix; AC; consumption mix, at consumer; 220V; EG	Electricity mix; AC; consumption mix, at consumer; 220V; EG

Compulsory indicators		E FORMAT WALL BOX - E157E					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	7.56E-06	7.56E-06	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.32E-03	1.21E-03	7.95E-05	3.36E-07	0*	3.47E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1.42E-04	1.15E-04	1.83E-05	7.74E-08	0*	8.15E-06
Contribution to global warming	kg CO <sub>2</sub> eq	4.67E-01	4.38E-01	1.74E-02	7.47E-05	0*	1.12E-02
Contribution to ozone layer depletion	kg CFC11 eq	2.15E-08	2.07E-08	3.53E-11	0*	0*	7.18E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.91E-04	1.82E-04	5.68E-06	2.37E-08	0*	3.75E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	4.41E-03	4.39E-03	1.56E-06	0*	0*	1.37E-05
Total Primary Energy	MJ	3.02E+01	2.98E+01	2.46E-01	0*	0*	1.75E-01

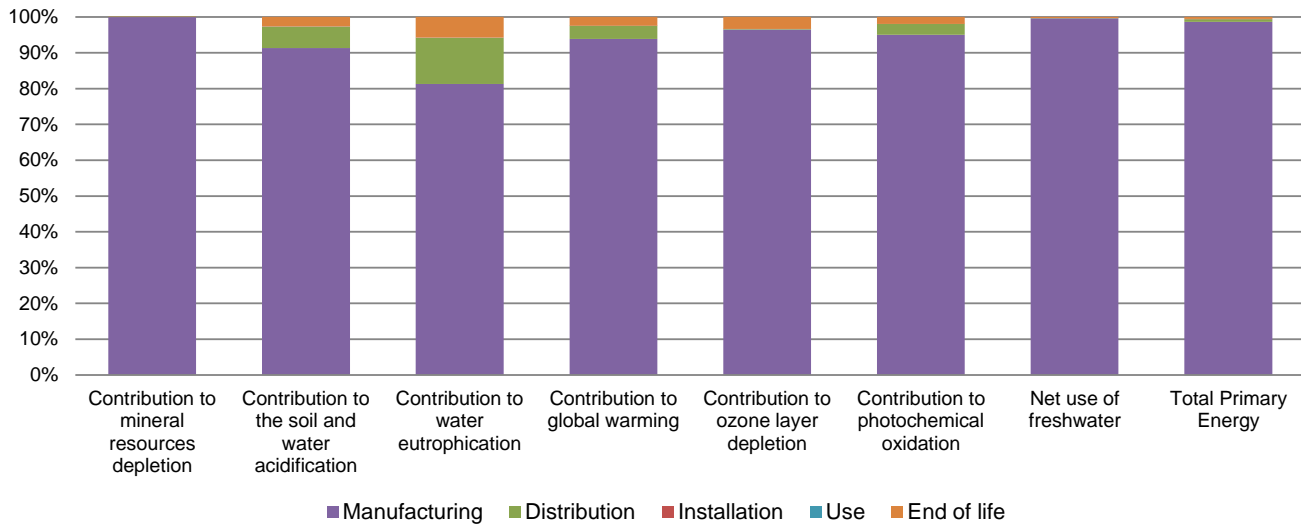

Optional indicators		E FORMAT WALL BOX - E157E						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	5.25E+00	4.85E+00	2.45E-01	1.05E-03	0*	1.59E-01	
Contribution to air pollution	m³	7.24E+01	7.04E+01	7.41E-01	0*	0*	1.23E+00	
Contribution to water pollution	m³	1.04E+01	6.16E+00	2.86E+00	1.23E-02	0*	1.32E+00	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	4.84E-02	4.84E-02	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	3.11E-01	3.11E-01	3.28E-04	0*	0*	1.96E-04	
Total use of non-renewable primary energy resources	MJ	2.99E+01	2.95E+01	2.46E-01	0*	0*	1.75E-01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.24E-02	1.19E-02	3.28E-04	1.39E-06	0*	1.96E-04	
Use of renewable primary energy resources used as raw material	MJ	2.99E-01	2.99E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.99E+01	2.95E+01	2.46E-01	0*	0*	1.75E-01	
Use of non renewable primary energy resources used as raw material	MJ	1.78E-02	1.78E-02	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	1.51E-01	2.19E-02	0*	3.07E-04	0*	1.28E-01	
Non hazardous waste disposed	kg	1.19E-02	1.07E-02	6.19E-04	2.63E-06	0*	5.40E-04	
Radioactive waste disposed	kg	8.44E-06	7.17E-06	4.41E-07	2.05E-09	0*	8.27E-07	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	1.47E-01	1.86E-02	0*	1.45E-02	0*	1.13E-01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.7.0.2, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number</i>	ENVPEP110719EN_V1	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	05/2018	<i>Supplemented by</i>	PSR-0003-ed1.1-EN-2015 10 16
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP110719EN\_V1

© 2017 - Schneider Electric – All rights reserved

05/2018