

# Product Environmental Profile

## Easy TeSys Control 3P 160A

### Easy TeSys Control




## General information

Reference product	Easy TeSys Control 3P 160A - LC1E160M5N
Description of the product	The main purpose of the product is to switch on and off electrical power supply of a downstream installation with an electrical and/or mechanical control.
Description of the range	The range product report includes : Operating current rating 120-160A, 3P, Easy TeSys control, the representative product used for analysis is Easy TeSys Control 3P 160A(LC1N160M5N) The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Switch on and off during 20 years electrical power supply of a downstream installation with an electrical and/or mechanical control. The functional unit is characterized by a type 1 NO + 1 NC, a control circuit 220V AC, a power circuit voltage 690V and a rated operational current 160A.

## Constituent materials

Reference product mass	2463 g including the product, its packaging and additional elements and accessories
------------------------	---

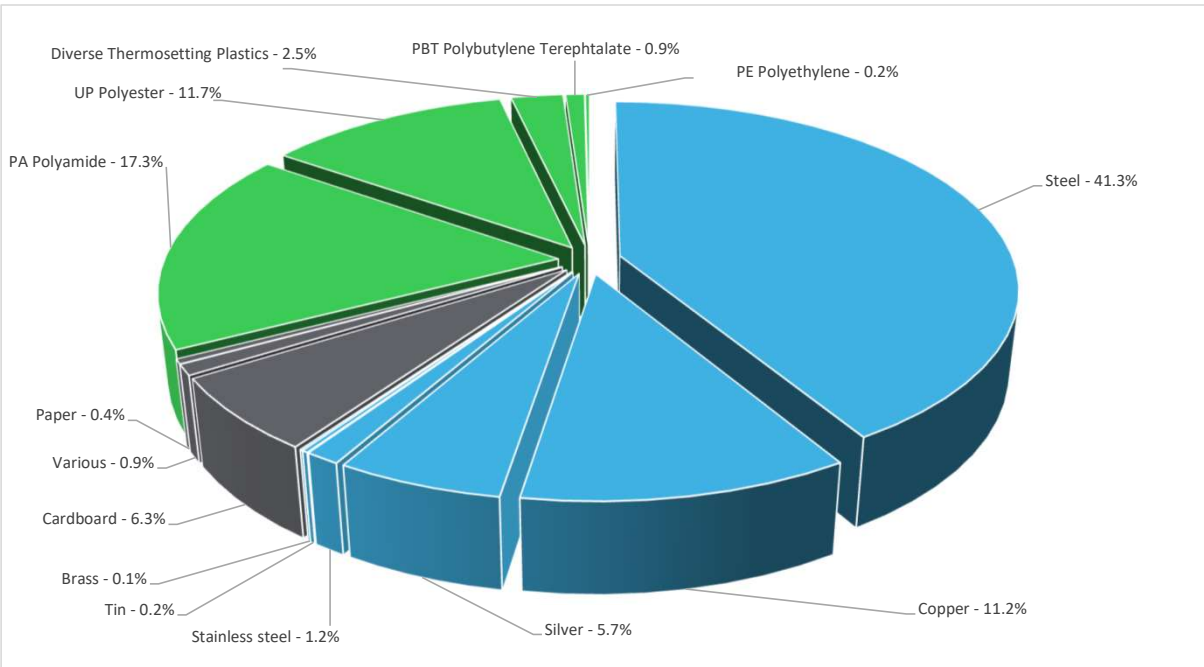

Plastics	32.60%
Metals	59.70%
Others	7.70%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <https://www.se.com/ww/en/work/support/green-premium/>

## Additional environmental information

<b>End Of Life</b>	Recyclability potential:	<b>63%</b>	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
--------------------	--------------------------	------------	---

## Environmental impacts

<b>Reference service life time</b>	20 years		
<b>Product category</b>	Contactor, remote control switch, combinations, starters		
<b>Installation elements</b>	No special components needed		
<b>Use scenario</b>	Load factor : 50% of Ip Use rate: 50% of the RLT		
<b>Technological representativeness</b>	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production		
<b>Geographical representativeness</b>	China		
<b>Energy model used</b>	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN
	[C1 - C4]		Electricity Mix; Production mix; Low voltage; CN

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			Easy TeSys Control 3P 160A - LC1E160M5N					
Impact indicators	Unit	Total	Manufacturing [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Benefits [D]
Contribution to climate change	kg CO2 eq	1.48E+03	2.26E+01	7.10E-01	2.97E-01	1.45E+03	5.03E+00	-8.00E+01
Contribution to climate change-fossil	kg CO2 eq	1.48E+03	2.07E+01	7.10E-01	2.83E-01	1.45E+03	4.98E+00	-7.95E+01
Contribution to climate change-biogenic	kg CO2 eq	2.19E+00	1.91E+00	0*	1.32E-02	2.09E-01	5.61E-02	-4.95E-01
Contribution to climate change-land use and land use change	kg CO2 eq	9.31E-07	0*	0*	0*	0*	9.31E-07	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.27E-05	3.69E-06	6.27E-07	1.96E-08	8.30E-06	5.10E-08	-1.29E-05
Contribution to acidification	mol H+ eq	1.12E+01	2.69E-01	3.09E-03	1.18E-03	1.09E+01	1.96E-02	-7.20E-01
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	2.62E-03	3.27E-04	0*	2.14E-06	3.07E-04	1.98E-03	-1.29E-04
Contribution to eutrophication marine	kg N eq	1.19E+00	2.39E-02	1.42E-03	3.12E-04	1.16E+00	3.44E-03	-4.80E-02
Contribution to eutrophication, terrestrial	mol N eq	1.35E+01	2.61E-01	1.54E-02	2.35E-03	1.32E+01	3.97E-02	-5.58E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	4.00E+00	9.42E-02	5.04E-03	6.28E-04	3.89E+00	1.22E-02	-2.09E-01
Contribution to resource use, minerals and metals	kg Sb eq	1.20E-01	1.20E-01	0*	0*	1.87E-05	5.60E-05	-2.53E-02
Contribution to resource use, fossils	MJ	2.42E+04	4.05E+02	8.62E+00	3.09E+00	2.35E+04	2.54E+02	-1.76E+03
Contribution to water use	m3 eq	7.37E+01	5.74E+00	3.60E-02	1.27E-01	6.42E+01	3.64E+00	-4.45E+01

*Additional indicators for the French regulation are available as well*

Inventory flows Indicators		Easy TeSys Control 3P 160A - LC1E160M5N						
Inventory flows	Unit	Total	Manufact. [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Benefits [D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.51E+03	2.34E+01	0*	0*	2.49E+03	1.36E+00	-1.84E+01
Contribution to use of renewable primary energy resources used as raw material	MJ	3.22E+00	3.22E+00	0*	0*	0*	0*	-3.04E+00
Contribution to total use of renewable primary energy resources	MJ	2.52E+03	2.66E+01	0*	0*	2.49E+03	1.36E+00	-2.14E+01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.42E+04	3.80E+02	8.62E+00	3.09E+00	2.35E+04	2.54E+02	-1.76E+03
Contribution to use of non renewable primary energy resources used as raw material	MJ	2.43E+01	2.43E+01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	2.42E+04	4.05E+02	8.62E+00	3.09E+00	2.35E+04	2.54E+02	-1.76E+03
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.74E+00	1.36E-01	8.39E-04	2.95E-03	1.49E+00	1.11E-01	-1.04E+00
Contribution to hazardous waste disposed	kg	4.90E+02	4.43E+02	0*	0*	4.42E+01	2.48E+00	-2.02E+03
Contribution to non hazardous waste disposed	kg	2.66E+02	1.13E+01	0*	9.65E-01	2.53E+02	3.45E-01	-6.41E+01
Contribution to radioactive waste disposed	kg	1.49E-02	4.21E-03	1.41E-04	1.30E-04	1.04E-02	2.77E-05	-2.73E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.60E+00	0*	0*	1.63E-01	0*	1.44E+00	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP1405005_V4	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°		Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	2024/01/11	Information and reference	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (Ddemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.se.com](http://www.se.com)

ENVPEP1405005\_V4

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

2024/01/11