

Product Environmental Profile

WISER WALL BOX POWER SUPPLY




General information

Reference product	WISER WALL BOX POWER SUPPLY - CCT501800-0001
Description of the product	Power supply for Wiser Hub CCT501800/CCT501801 when mounted on a recessed wallbox Transforming 100-240 VAC into 5 VDC to supply the power for Wiser Hub CCT501800/CCT501801 With a size of only 52 x 40 x 22 mm, it fits well in a CE60 wall box. Clean wall installation with no visible cables.
Functional unit	Provide one USB-C connection with a load consuming of 1.5A under a voltage of 240V installed in a residential network, and a 5Vdc output, according to the appropriate use scenario, and for the reference service life of the product of 10 years.

Constituent materials

Reference product mass 54.56 g including the product, its packaging and additional elements and accessories

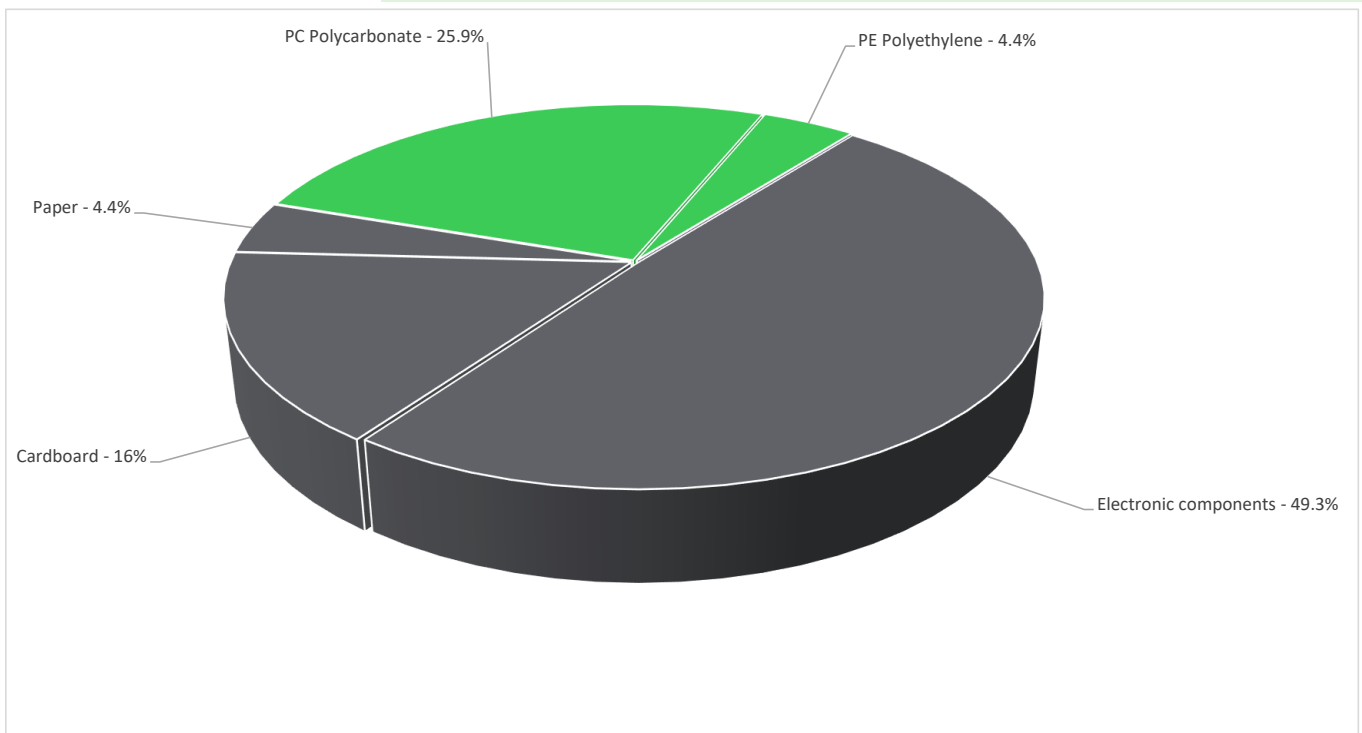

Others	69.70%
Plastics	30.30%
Metals	0.00%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<https://www.se.com/ww/en/work/support/green-premium/>

**Additional environmental information**

End Of Life	Recyclability potential:	0%	Recyclability rate has been calculated based on REEECY [®] LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	----	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Environmental impacts**

Reference service life time	10 years		
Product category	USB socket		
Installation elements	Ref CCT501800-0001 does not require any installation operations. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal)		
Use scenario	Load rate: 100 % of the rated current according to the USB - C standards Load rate: 30% de the RLT		
Technological representativeness	Power supply for Wiser Hub CCT501800/CCT501801 when mounted on a recessed wallbox Transforming 100-240 VAC into 5 VDC to supply the power for Wiser Hub CCT501800/CCT501801 With a size of only 52 x 40 x 22 mm, it fits well in a CE60 wall box. Clean wall installation with no visible cables.		
Geographical representativeness	Europe		
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27
			[C1 - C4]
			Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		WISER WALL BOX POWER SUPPLY - CCT501800-0001						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	8.17E+01	7.60E-01	0*	2.05E-02	8.08E+01	8.03E-02	-1.97E-02
Contribution to climate change-fossil	kg CO2 eq	8.15E+01	7.57E-01	0*	1.96E-02	8.07E+01	7.77E-02	-2.08E-02
Contribution to climate change-biogenic	kg CO2 eq	1.14E-01	2.64E-03	0*	9.04E-04	1.08E-01	2.55E-03	1.07E-03
Contribution to climate change-land use and land use change	kg CO2 eq	2.29E-08	2.29E-08	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	5.02E-07	1.52E-07	0*	1.35E-09	3.45E-07	3.33E-09	-4.57E-10
Contribution to acidification	mol H+ eq	4.72E-01	9.26E-03	0*	8.15E-05	4.61E-01	1.29E-03	-9.34E-05
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	2.32E-04	9.68E-06	0*	1.47E-07	2.21E-04	8.95E-07	-2.18E-07
Contribution to eutrophication marine	kg N eq	5.44E-02	1.03E-03	2.16E-05	2.17E-05	5.24E-02	9.30E-04	-2.57E-05
Contribution to eutrophication, terrestrial	mol N eq	7.99E-01	1.12E-02	2.36E-04	1.65E-04	7.87E-01	4.18E-04	-2.03E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.72E-01	3.83E-03	5.97E-05	4.41E-05	1.68E-01	1.73E-04	-5.07E-05
Contribution to resource use, minerals and metals	kg Sb eq	3.63E-04	3.57E-04	0*	0*	5.85E-06	0*	-8.44E-10
Contribution to resource use, fossils	MJ	2.07E+03	1.49E+01	0*	2.13E-01	2.06E+03	4.98E-01	-1.37E-01
Contribution to water use	m3 eq	2.07E+01	1.14E+00	0*	8.69E-03	2.86E+00	1.67E+01	-1.09E-02

Additional indicators for the French regulation are available as well

Inventory flows Indicators			WISER WALL BOX POWER SUPPLY - CCT501800-0001						
Inventory flows	Unit	Total	Manufact. [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Loads and Benefits [D]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.96E+02	3.16E-01	0*	0*	3.95E+02	7.26E-02	1.22E-01	
Contribution to use of renewable primary energy resources used as raw material	MJ	6.95E-03	6.95E-03	0*	0*	0*	0*	-1.62E-01	
Contribution to total use of renewable primary energy resources	MJ	3.96E+02	3.23E-01	0*	0*	3.95E+02	7.26E-02	-4.08E-02	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.07E+03	1.40E+01	0*	2.13E-01	2.06E+03	4.98E-01	-1.37E-01	
Contribution to use of non renewable primary energy resources used as raw material	MJ	8.51E-01	8.51E-01	0*	0*	0*	0*	0.00E+00	
Contribution to total use of non-renewable primary energy resources	MJ	2.07E+03	1.49E+01	0*	2.13E-01	2.06E+03	4.98E-01	-1.37E-01	
Contribution to use of secondary material	kg	1.20E-02	1.20E-02	0*	0*	0*	0*	0.00E+00	
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to net use of freshwater	m³	5.30E-01	2.65E-02	0*	2.02E-04	6.66E-02	4.36E-01	-2.54E-04	
Contribution to hazardous waste disposed	kg	7.00E+00	5.45E+00	0*	0*	1.51E+00	4.12E-02	1.46E-03	
Contribution to non hazardous waste disposed	kg	1.19E+01	1.47E-01	0*	6.62E-02	1.16E+01	1.55E-02	-2.91E-01	
Contribution to radioactive waste disposed	kg	2.55E-03	1.10E-04	0*	8.89E-06	2.43E-03	7.82E-07	-1.46E-05	
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to materials for recycling	kg	1.12E-02	0*	0*	1.12E-02	0*	0*	0.00E+00	
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	


* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Environmental Factor V3.0

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number :</i>	SCHN-00766-V01.01-EN	<i>Drafting rules</i>	PEP-PCR-ed4-2021 09 06
<i>Verifier accreditation N°</i>	VH38	<i>Supplemented by information and reference documents</i>	PSR-0005-ed3.1 FR 2023 12 08 www.pep-ecopassport.org
<i>Date of issue</i>	27/08/2024	<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal External X			
<i>The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)</i> <i>PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019</i> <i>The elements of the present PEP cannot be compared with elements from another program.</i> <i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 928 298 512 €

www.se.com

SCHN-00766-V01.01-EN

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

12/07/2024