

# Product Environmental Profile

## PUSH-IN TERMINAL BLOCKS NSYTRP






## General information

Reference product	PUSH-IN TERMINAL BLOCKS NSYTRP - NSYTRP22
Description of the product	<p>The main purpose of the Push-In Terminal Block NSYTRP is to connect copper conductors and define logical domains inside an enclosure.</p> <p>Feed-through terminal block, nom. voltage: 800 V, nominal current: 24 A, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray</p> <p>This range consists of Push-In Terminal Block with a cross section area 2.5mm<sup>2</sup> up to 4mm<sup>2</sup>.</p>
Functional unit	Connect during 20 years 2 clamping units between 2 or more wires with a rated connecting capacity 19 A, a rated cross-section 2.5 mm <sup>2</sup> , a rated voltage 550 V, a short-time withstand current 0.3 kA.



## Constituent materials

Reference product mass 6.1856 g including the product, its packaging and additional elements and accessories

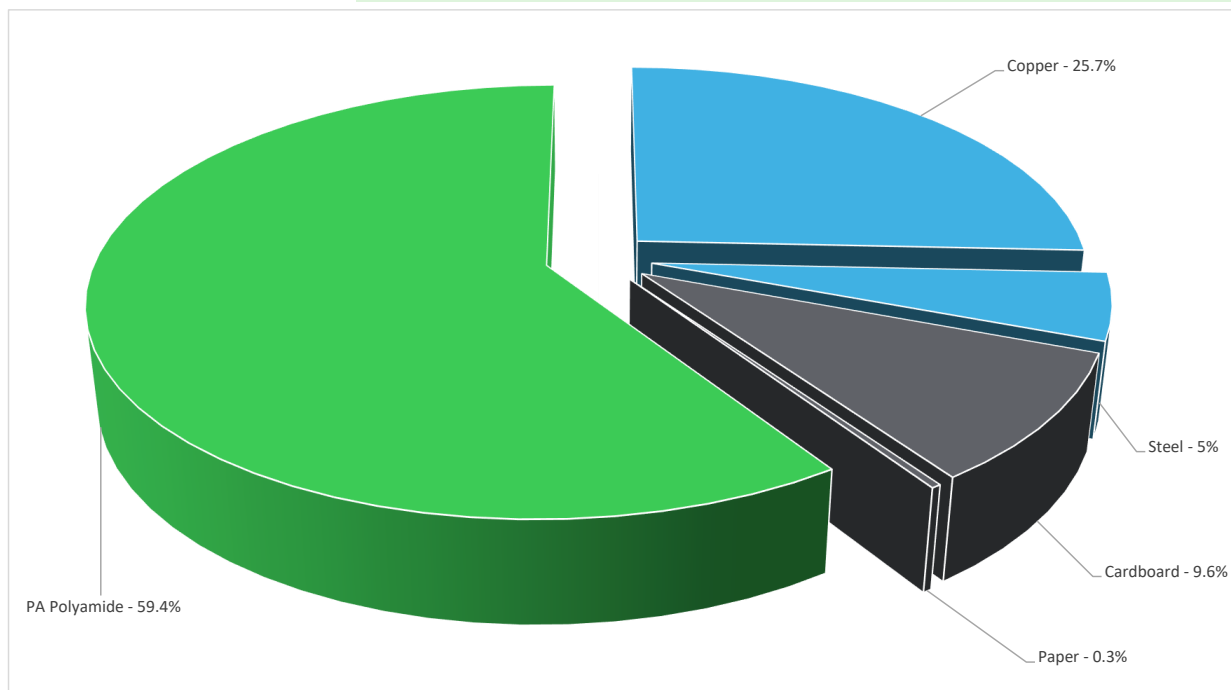

Plastics	59.4%
Metals	30.7%
Others	9.9%



## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>

**Additional environmental information**

End Of Life	Recyclability potential:	33%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	---

**Environmental impacts**

Reference service life time	20 years		
Product category	Terminal blocks for copper conductors and disconnect terminal blocks (standard 60947-7-1)		
Installation elements	No special components needed		
Use scenario	Load factor: 30% of In Use rate: 90% of the RLT		
Technological representativeness	The Modules of technologies such as material production, manufacturing process and transport technology used in this PEP analysis(LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.		
Geographical representativeness	Europe		
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Production mix; Low voltage; GE	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27
			[C1 - C4]
			Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRred4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		PUSH-IN TERMINAL BLOCKS NSYTRP - NSYTRP22						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	4.53E+00	3.85E-02	8.09E-04	7.30E-04	4.48E+00	1.59E-02	-4.87E-03
Contribution to climate change-fossil	kg CO2 eq	4.53E+00	3.77E-02	8.09E-04	7.29E-04	4.47E+00	1.56E-02	-4.57E-03
Contribution to climate change-biogenic	kg CO2 eq	7.11E-03	8.09E-04	0*	1.29E-06	5.97E-03	3.23E-04	-3.08E-04
Contribution to climate change-land use and land use change	kg CO2 eq	5.39E-09	0*	0*	0*	0*	5.39E-09	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.14E-08	2.01E-09	0*	3.32E-12	1.92E-08	2.15E-10	-1.22E-09
Contribution to acidification	mol H+ eq	2.60E-02	4.08E-04	5.20E-06	0*	2.56E-02	4.91E-05	-2.69E-04
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	2.45E-05	7.63E-07	0*	1.23E-08	1.23E-05	1.15E-05	-6.88E-09
Contribution to eutrophication marine	kg N eq	2.95E-03	3.38E-05	2.44E-06	2.97E-07	2.90E-03	7.86E-06	-4.62E-06
Contribution to eutrophication, terrestrial	mol N eq	4.41E-02	3.38E-04	2.68E-05	0*	4.36E-02	9.96E-05	-5.42E-05
Contribution to photochemical ozone formation - human health	kg COVNM eq	9.47E-03	1.22E-04	6.77E-06	0*	9.32E-03	2.36E-05	-3.23E-05
Contribution to resource use, minerals and metals	kg Sb eq	1.59E-05	1.52E-05	0*	0*	3.24E-07	3.23E-07	-2.45E-06
Contribution to resource use, fossils	MJ	1.15E+02	5.95E-01	0*	0*	1.14E+02	1.07E-01	-8.51E-02
Contribution to water use	m3 eq	1.91E-01	2.30E-02	0*	2.00E-05	1.58E-01	9.77E-03	-1.29E-02

Additional indicators for the French regulation are available as well

Inventory flows Indicators		PUSH-IN TERMINAL BLOCKS NSYTRP - NSYTRP22						
Inventory flows	Unit	Total	Manufact. [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Benefits [D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.19E+01	9.32E-03	0*	0*	2.19E+01	7.81E-03	-6.57E-03
Contribution to use of renewable primary energy resources used as raw material	MJ	1.21E-02	1.21E-02	0*	0*	0*	0*	-2.88E-04
Contribution to total use of renewable primary energy resources	MJ	2.19E+01	2.14E-02	0*	0*	2.19E+01	7.81E-03	-6.85E-03
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.15E+02	5.09E-01	0*	0*	1.14E+02	1.07E-01	-8.51E-02
Contribution to use of non renewable primary energy resources used as raw material	MJ	8.52E-02	8.52E-02	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1.15E+02	5.95E-01	0*	0*	1.14E+02	1.07E-01	-8.51E-02
Contribution to use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	4.45E-03	5.35E-04	0*	4.66E-07	3.69E-03	2.28E-04	-3.00E-04
Contribution to hazardous waste disposed	kg	3.40E-01	2.51E-01	0*	0*	8.37E-02	5.64E-03	-2.21E-01
Contribution to non hazardous waste disposed	kg	6.82E-01	3.24E-02	0*	7.59E-04	6.44E-01	4.00E-03	-1.64E-03
Contribution to radioactive waste disposed	kg	1.45E-04	1.03E-05	2.02E-08	3.55E-08	1.35E-04	1.66E-07	-7.33E-07
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.88E-03	0*	0*	1.60E-05	0*	1.86E-03	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	3.41E-04	0*	0*	3.41E-04	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00


\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

For all the impact indicators except th ADPe and GWPlu, the Use stage is the greatest contributor due to the energy losses occurring throughout the product reference service lifetime. For ADPe the raw material and manufacturing stage is the main contributor.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01065-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	11/2023	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal                      External    X			
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €