

Product Environmental Profile

Mureva BOX - junction box - 7 grommets Ø20 - 80x80x45 mm

As referent product of :

All Mureva Surface mounted junction boxes




General information

Reference product	Mureva BOX - junction box - 7 grommets Ø20 - 80x80x45 mm - ENN05004
Description of the product	The main function of the Mureva Junction Box for Electrical Installation is to protect the electrical connections against liquids, ingress of solid objects and shocks. The representative product used for the analysis is a ENN05004 box without terminal block.
Description of the range	All Mureva Surface mounted junction boxes
Functional unit	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure or a cabinet having the following dimensions 80 x 80 x 45 mm, while protecting against mechanical impacts (IK07) and the penetration of solid objects and liquids (IP55).

Constituent materials

Reference product mass 92,3 g including the product, its packaging and additional elements and accessories

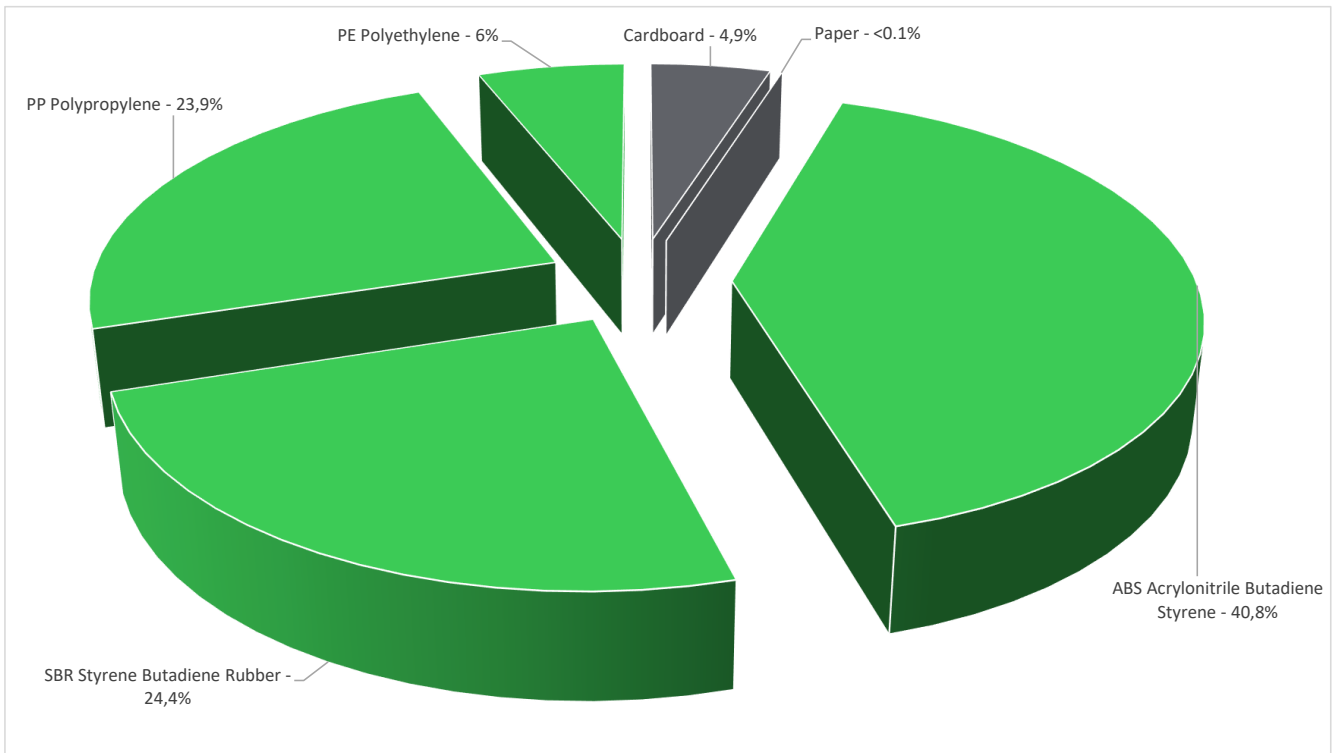

Plastics	95,1%
Others	4,9%
Metals	0,0%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>

Additional environmental information

End Of Life	Recyclability potential:	0%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	----	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Environmental impacts

Reference service life time	20 years		
Product category	Unequipped enclosures and cabinets		
Installation elements	Reference ENN05004 does not require any special installation operations. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).		
Use scenario	Non applicable for unequipped enclosures and cabinets		
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product		
Geographical representativeness	Europe		
Energy model used	[A1 - A3]	[A5]	[B6]
	Electricity Mix; Production mix; Low voltage; PL	Electricity Mix; Production mix; Low voltage; UE-27	Not Applicable
			[C1 - C4]
			Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		Mureva BOX - junction box - 7 grommets Ø20 - 80x80x45 mm - ENN05004						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	6,95E-01	5,90E-01	1,21E-02	8,33E-03	0*	8,43E-02	-1,05E-02
Contribution to climate change-fossil	kg CO2 eq	6,84E-01	5,79E-01	1,21E-02	7,97E-03	0*	8,43E-02	-1,01E-02
Contribution to climate change-biogenic	kg CO2 eq	1,09E-02	1,06E-02	0*	3,61E-04	0*	0*	-3,35E-04
Contribution to climate change-land use and land use change	kg CO2 eq	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	1,15E-08	1,02E-08	1,85E-11	5,39E-10	0*	7,62E-10	-4,82E-10
Contribution to acidification	mol H+ eq	2,35E-03	2,18E-03	7,76E-05	3,36E-05	0*	5,97E-05	-4,92E-05
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	3,72E-06	3,66E-06	4,52E-09	5,88E-08	0*	2,16E-09	-9,98E-08
Contribution to eutrophication marine	kg N eq	6,59E-04	5,95E-04	3,65E-05	9,15E-06	0*	1,86E-05	-1,23E-05
Contribution to eutrophication, terrestrial	mol N eq	7,00E-03	6,30E-03	4,00E-04	7,11E-05	0*	2,25E-04	-1,04E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	2,13E-03	1,96E-03	1,01E-04	1,89E-05	0*	5,59E-05	-2,77E-05
Contribution to resource use, minerals and metals	kg Sb eq	3,71E-08	3,61E-08	4,74E-10	2,79E-10	0*	2,38E-10	-7,77E-10
Contribution to resource use, fossils	MJ	1,44E+01	1,40E+01	1,68E-01	8,75E-02	0*	1,32E-01	-9,25E-02
Contribution to water use	m3 eq	2,03E-01	1,92E-01	4,58E-05	3,47E-03	0*	7,11E-03	-6,19E-03

Inventory flows Indicators		Mureva BOX - junction box - 7 grommets Ø20 - 80x80x45 mm - ENN05004						
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5,53E-02	4,85E-02	2,24E-04	6,08E-03	0*	5,08E-04	4,82E-02
Contribution to use of renewable primary energy resources used as raw material	MJ	1,69E-01	1,69E-01	0*	0*	0*	0*	-8,04E-02
Contribution to total use of renewable primary energy resources	MJ	2,24E-01	2,18E-01	2,24E-04	6,08E-03	0*	5,08E-04	-3,23E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7,57E+00	7,18E+00	1,68E-01	8,75E-02	0*	1,32E-01	-9,25E-02
Contribution to use of non renewable primary energy resources used as raw material	MJ	6,84E+00	6,84E+00	0*	0*	0*	0*	0,00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1,44E+01	1,40E+01	1,68E-01	8,75E-02	0*	1,32E-01	-9,25E-02
Contribution to use of secondary material	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to net use of freshwater	m ³	4,72E-03	4,47E-03	1,07E-06	8,09E-05	0*	1,66E-04	-1,44E-04
Contribution to hazardous waste disposed	kg	1,26E-01	4,45E-03	0*	9,61E-05	0*	1,22E-01	-2,44E-04
Contribution to non hazardous waste disposed	kg	4,15E-01	3,63E-01	4,23E-04	2,65E-02	0*	2,60E-02	-1,17E-01
Contribution to radioactive waste disposed	kg	9,12E-05	8,59E-05	3,01E-07	3,56E-06	0*	1,42E-06	-5,98E-06
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to materials for recycling	kg	4,47E-03	0*	0*	4,47E-03	0*	0*	0,00E+00
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to exported energy	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to biogenic carbon content of the product	kg de C	0,00E+00	0*	0*	0*	0*	0*	0,00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0,00E+00	0*	0*	0*	0*	0*	0,00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044 and the method of calculation EF3.0.

Detailed results, including all the optional indicators mentioned in PCRred4, and the split of the Use Phase (B1 to B7), are available on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01103-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH48	Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	11/2023	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal	External	X	
<i>The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)</i>			
<i>PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 928 298 512 €

www.se.com

SCHN-01103-V01.01-EN

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

11/2023