

LAL (Standard Interrupting)

Ratings: 600VAC/250VDC, 125 - 400 AMPERE

LHL (High Interrupting)

Ratings: 600VAC/250VDC, 125 - 400 AMPERE

LCL (Extra High Interrupting)

Ratings: 600VAC, 300 - 400 AMPERE

LAL & LHL (125 - 400 AMP)

Wire Size: (1) #1 - 600 kcmil

Terminal Torque: -

LCL (300 - 400 AMP) Wire Size: (2) #4/0 - 500 kcmil

Terminal Torque: -

SEE CHART Catalog Number: SEE CHART Ratings: UL File/Guide: E10027 CSA File/Guide: LR7551 Meets Standards: IEC 157-1 Weight: 8.50 lbs. Wire Size: SEE CHART Terminal torque:

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY.

USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

8-32 SCREWS

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 PLACE DECIMALS ± .01

CIRCUIT BREAKERS (400A FRAME) (THERMAL MAGNETIC MOLDED CASE)



DWG# LA-LC-LH_3P_400A_OUTLINE_001

Electrical Clearance/Wire Bending Space

14.00

2.00 -

-5.98


- 2.81


4.27

3.73

0

-2.00

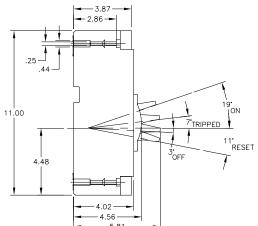

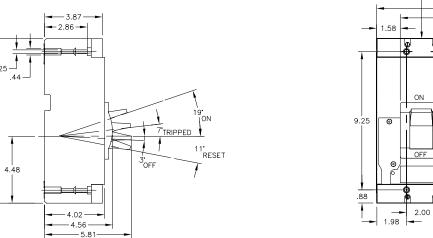

Wire bending space is based upon the maximum wire size of the terminal, and NEC article 430—10.

Wire bending space for the bottom is the

same as the top wire bending space.

THIRD ANGLE PROJECTION SEE CHART TOLERANCES. UNLESS OTHERWISE SPECIFIED

Mounting Hwd.: