



# PowerLogic™ PowerTag Control Technical Datasheet

PowerTag Control monitors circuits wirelessly, collecting status of daisy-chained circuit breakers and notifying the data concentrator of information status, such as OF, SD, Contractor or Impulse Relay position indication. These wireless input/output modules allow circuit control and status monitoring. Designed for use in commercial and building applications, they quickly and easily turn your distribution board into a connected panel.

PowerTag Control also connects to pulse relays or contactors for remote control within a building management system for non-critical loads, such as lighting.

## Applications:


- Monitors your electrical installation from main incomer down to load level
- Suitable for various business, buildings, industrial and residential applications with easy integration in upper systems
- Supports and enables Energy efficiency programs and standards such as:
  - European Energy Efficiency Directive (EED)
  - Energy Performance of Buildings Directive (EPBD)
  - IEC 60364-8-1 “Low Voltage Electrical installations - Energy Efficiency”
  - EN 17267 “Energy Measurement and Monitoring plan”
  - ISO 50001 “Energy Management System”

A9XMC2D3 image2




A9XMC2D3


# PowerTag Control



Clip on DIN rail 35 mm.



Indifferent position of installation.

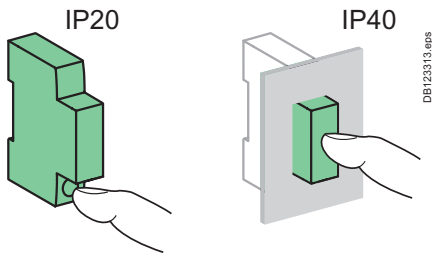


## Technical characteristics

Main characteristics		
Power supply		230 V AC ± 20%
Frequency		50/60 Hz
Maximum consumption	IO	≤ 2 VA
	2DI	≤ 3 VA
Operating temperature		-25°C to +60°C
Storage temperature		-40°C to +85°C
Relative humidity (60068-2-78)		93 % at 40°C
Overvoltage category	As per IEC 61010-1	Cat. III
Altitude		≤ 2000 m
Pollution degree		3
Degree of protection according to IEC 60529	Front face	IP40
	Casing	IP20
	IK	05
Characteristics of inputs and outputs		
Digital input		
Type		230 V AC, dry contact
Digital output		
Type		230 V AC, dry contact
Relay type		Normally open or normally closed <sup>(3)</sup>
Applicable voltage on output		230 V AC ± 20%
Minimum/maximum current on output		10 mA / 2 A
Type of output order		Pulse or latch <sup>(3)</sup>
Pulse length in control mode with impulse relay		Nominal: 300 ms
Radio-frequency communication		
ISM band 2.4 GHz		2.4 GHz to 2.4835 GHz
Channels	As per IEEE 802.15.4	11 to 26
Isotropic Radiated Power	Equivalent (EIRP)	0 dBm
Channel occupancy	Messages sent	■ On event
		■ Periodically (5s nominal)

(3) Setting adjustable

## Dimensions (mm)

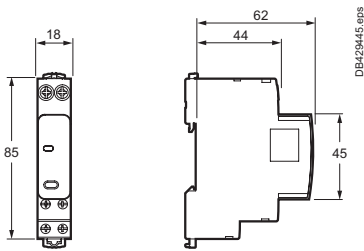

## Weight (g)

PowerTag C	
PowerTag C IO 230 V	80
PowerTag C 2DI 230 V	75


## Connection

Terminals	Tightening torque	Copper cables		
		Rigid	Flexible	Flexible with ferrule
Power supply (Top)	2 N.m	1 to 16 mm <sup>2</sup> (AWG: 18...6)	0.5 to 10 mm <sup>2</sup> (AWG: 21...8)	-
	1 N.m	1x: 1 to 6 mm <sup>2</sup> (AWG: 18...10) 2x: 1.5 to 2.5 mm <sup>2</sup> (AWG: 16...14)	1x: 0.5 to 4 mm <sup>2</sup> (AWG: 21...12) 2x: 1.5 to 2.5 mm <sup>2</sup> (AWG: 16...14)	1x: 0.5 to 4 mm <sup>2</sup> (AWG: 21...12) 2x: -
Input/Output (Bottom)				

# PowerTag Control

## PowerTag C IO module


- Compatible with horizontal comb busbars 9 mm modules
- Automatic cable guiding in the correct position: terminals with guard



DB430239.eps

- Assembly and disassembly by operating toggle latches at the top and bottom of the products

- Status LED**
- Provide information about PowerTag C status



DB430240.eps

- Insulated terminals IP20




A9XMC1D3\_image2.65.eps



DB430241.eps

- Logo**
- Wireless communication device

- Push button**
- Local output control
  - Decommissioning



DB430238.eps


- Monitoring / Back loop circuit**
- "I" digital input terminal
  - "C" common powered terminal 230 V AC

- Control circuit**
- Logical output relay
  - "O" output terminals 230 V AC - 2 A max.

# PowerTag Control

## PowerTag C 2DI module

- Compatible with horizontal comb busbars 9 mm modules
- Automatic cable guiding in the correct position: terminals with guard



DB430243.eps

- Assembly and disassembly by operating toggle latches at the top and bottom of the products

- Status LED**
- Provide information about PowerTag C status



DB430244.eps

- Insulated terminals IP20



A9XMC2D3\_image2.45.eps



DB430245.eps

- Flush mounted push button**
- Decommissioning

- Logo**
- Wireless communication device



DB430242.eps

- Monitoring circuits**
- "I" digital input terminals
  - "C" common powered terminals 230 V AC



[www.se.com](http://www.se.com)

Schneider Electric Industries SAS  
35, Rue Joseph Monier  
CS 30323  
92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439  
Capital social 928 298 512 €  
[www.se.com](http://www.se.com)

May 2022  
PowerLogic™ PowerTag Control  
**PLSED310180EN**

© 2022 - Schneider Electric. All rights reserved.  
All trademarks are owned by Schneider Electric  
Industries SAS or its affiliated companies.

As standards, specifications and designs develop from time to time, please  
ask for confirmation of the information given in this document.

Over 75 % of Schneider Electric products  
have been awarded the Green Premium ecolabel.

