

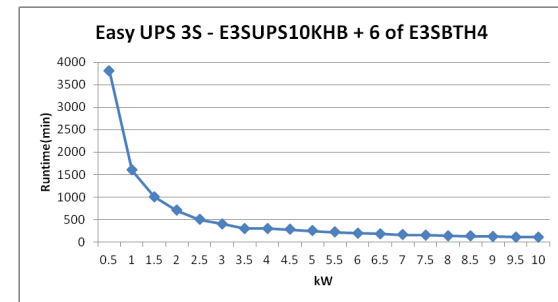
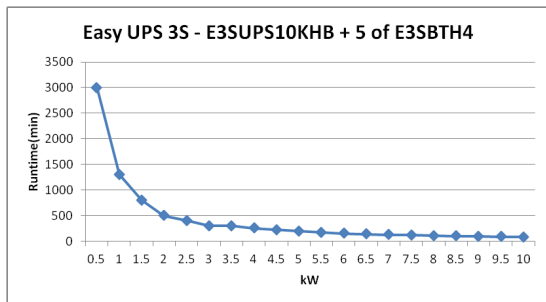
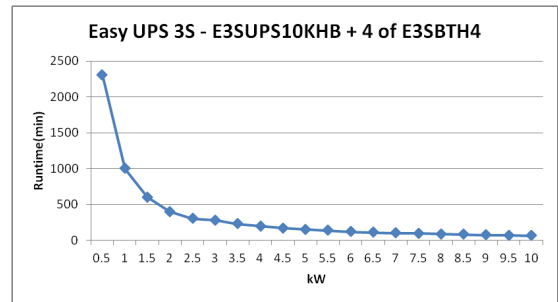
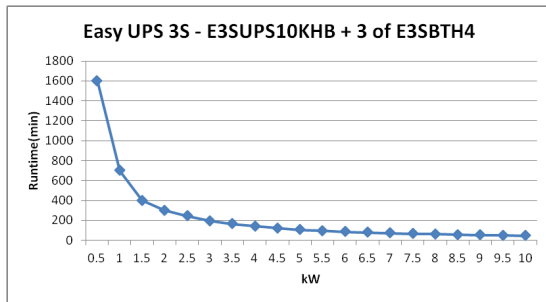
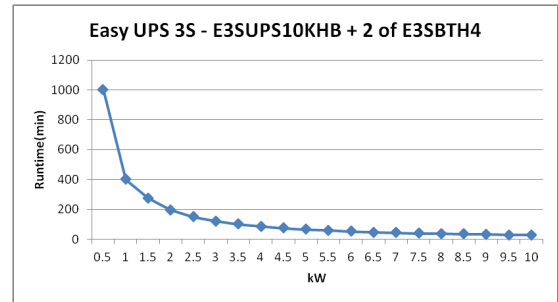
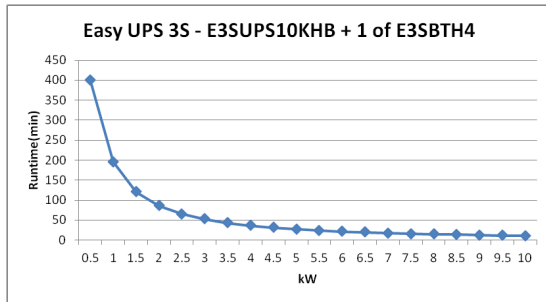
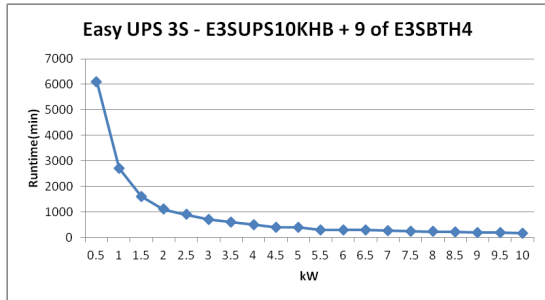


Easy UPS 3S - 10kVA – Runtime Table

UPS with battery of E3SBTH4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS10KHB/ E3SUPS10K3IB +			E3SUPS10KHB/ E3SUPS10K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4
5%	0.5	0.5	400	1000	1600	2300	3000	3800	4500	5300	6100
10%	1	1	195	400	700	1000	1300	1600	2000	2300	2700
15%	1.5	1.5	120	275	400	600	800	1000	1200	1400	1600
20%	2	2	85.5	195	300	400	500	700	800	1000	1100
25%	2.5	2.5	65	150	245	300	400	500	600	700	900
30%	3	3	52.5	120	195	280	300	400	500	600	700
35%	3.5	3.5	43	100	165	230	300	300	400	500	600
40%	4	4	36.5	86	140	195	255	300	300	400	500
45%	4.5	4.5	31.5	74.5	120	170	225	280	300	300	400
50%	5	5	27.5	65.5	105	150	195	245	295	300	400
55%	5.5	5.5	24	58	95.5	135	175	220	265	300	300
60%	6	6	21.5	52	86	120	155	195	235	280	300
65%	6.5	6.5	19.5	47	78	110	140	180	215	250	290
70%	7	7	17.5	43	71	100	130	160	195	230	265
75%	7.5	7.5	16	39.5	65.5	93	120	150	180	210	245
80%	8	8	14.5	36.5	60.5	86	110	140	165	195	225
85%	8.5	8.5	13.5	34	56	80	100	130	155	180	210
90%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195
95%	9.5	9.5	11.5	29	48.5	69	91	110	135	160	185
100%	10	10	10.5	27.5	45.5	65	85.5	105	125	150	170






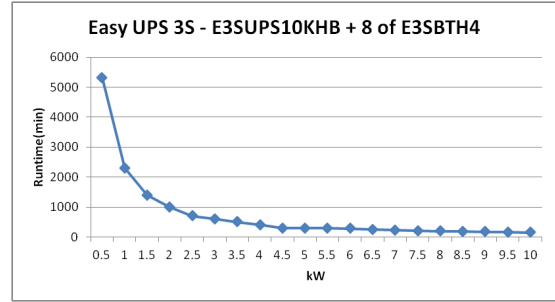




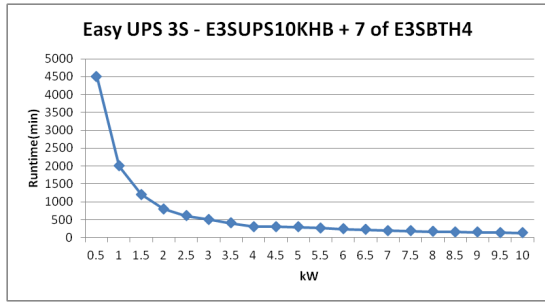


Easy UPS 3S - 10kVA – Runtime Table

UPS with battery of E3SBT4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS10KHB1/ E3SUPS10K3IB1 or E3SUPS10KHB/ E3SUPS10K3IB + 1 of E3SBT4	E3SUPS10KHB2/ E3SUPS10K3IB2 or E3SUPS10KHB/ E3SUPS10K3IB + 2 of E3SBT4	E3SUPS10KHB2/ E3SUPS10K3IB2 + 1 of E3SBT4 or E3SUPS10KHB/ E3SUPS10K3IB + 3 of E3SBT4	E3SUPS10KHB/ E3SUPS10K3IB + 1 of E3SXR6					
						4 of E3SBT4	5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4
5%	0.5	0.5	300	900	1400	2000	2700	3400	4000	4800	5500
10%	1	1	170	300	600	900	1100	1400	1700	2000	2400
15%	1.5	1.5	100	240	300	500	700	900	1000	1200	1400
20%	2	2	73	170	275	300	500	600	700	900	1000
25%	2.5	2.5	55	130	210	300	300	400	500	600	800
30%	3	3	44	100	170	240	300	300	400	500	600
35%	3.5	3.5	36	86.5	140	200	260	300	300	400	500
40%	4	4	30.5	73	120	170	220	280	300	300	400
45%	4.5	4.5	26	63	100	145	190	240	290	300	300
50%	5	5	22.5	55.5	91.5	130	170	210	255	300	300
55%	5.5	5.5	20	49	81.5	115	150	190	225	265	300
60%	6	6	17.5	44	73	100	135	170	205	240	280
65%	6.5	6.5	15.5	39.5	66	94.5	120	155	185	220	250
70%	7	7	14	36	60	86	110	140	170	200	230
75%	7.5	7.5	13	33	55	79	100	130	155	185	210
80%	8	8	11.5	30	51	73	96	120	145	170	195
85%	8.5	8.5	10.5	28	47	68	89.5	110	135	155	180
90%	9	9	9.9	26	44	63	83.5	100	125	145	170
95%	9.5	9.5	9.1	24	40.5	58.5	77.5	97	115	135	155
100%	10	10	8.4	22.5	38.5	55	73	91.5	110	130	150

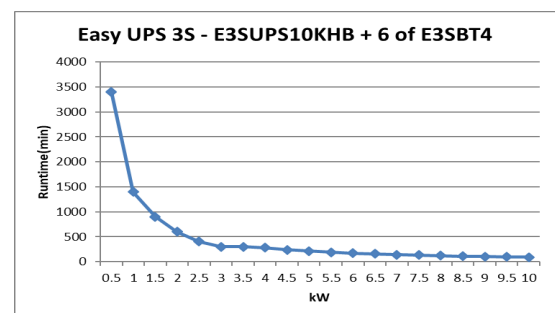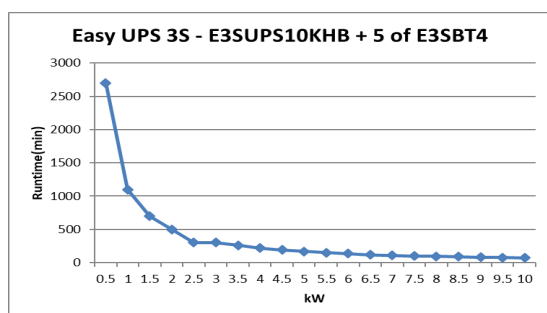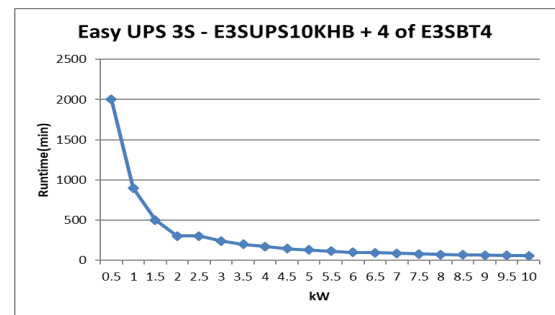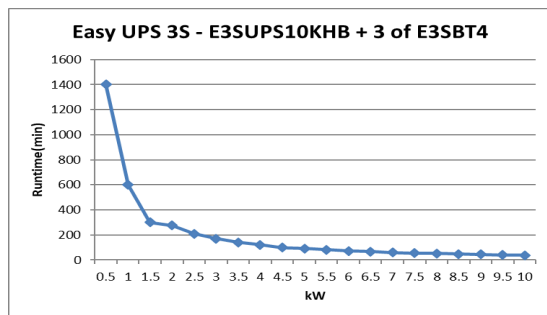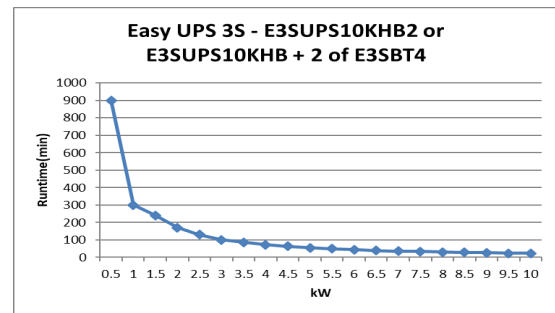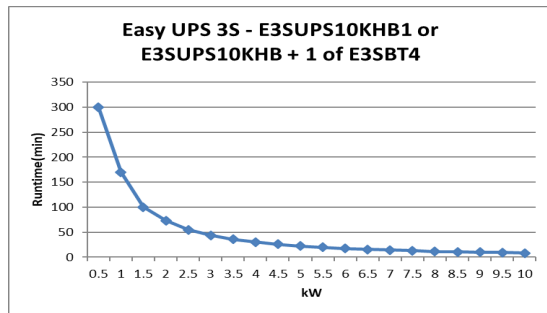

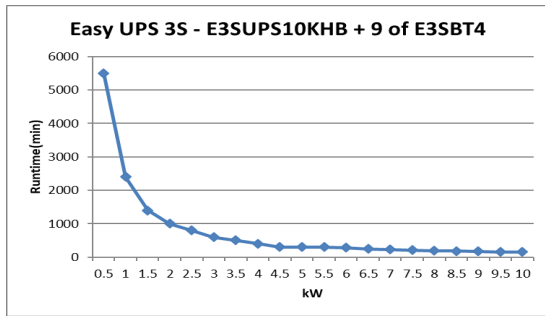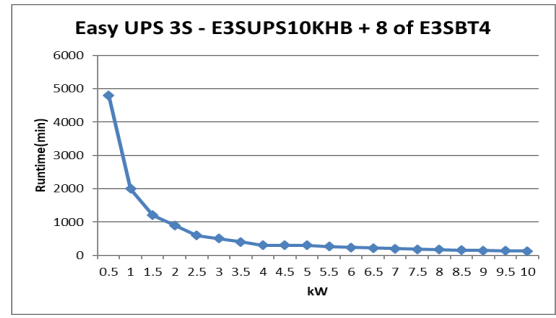
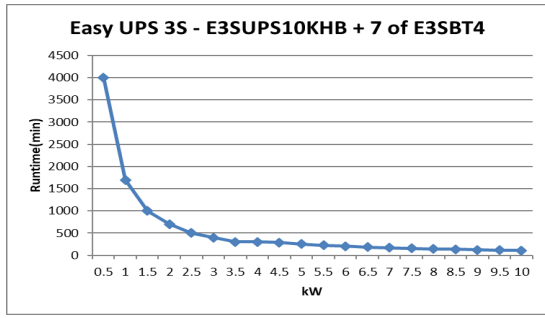












Easy UPS 3S - 15kVA – Runtime Table




UPS with battery of E3SBTH4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS15KHB/ E3SUPS15K3IB +			E3SUPS15KHB/ E3SUPS15K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4
5%	0.75	0.75	280	600	1000	1400	1900	2300	2800	3300	3800
10%	1.5	1.5	120	275	400	600	800	1000	1200	1400	1600
15%	2.25	2.25	74.5	170	280	300	500	600	700	900	1000
20%	3	3	52.5	120	195	280	300	400	500	600	700
25%	3.75	3.75	39.5	93	150	210	280	300	400	400	500
30%	4.5	4.5	31.5	74.5	120	170	225	280	300	300	400
35%	5.25	5.25	25.5	61.5	100	140	185	230	275	300	300
40%	6	6	21.5	52	86	120	155	195	235	280	300
45%	6.75	6.75	18.5	45	74.5	105	135	170	205	240	280
50%	7.5	7.5	16	39.5	65.5	93	120	150	180	210	245
55%	8.25	8.25	14	35	58	82.5	105	135	160	190	220
60%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195
65%	9.75	9.75	11	28.5	47.5	67.5	88.5	110	130	155	180
70%	10.5	10.5	10	26	43	61.5	81	100	120	140	165
75%	11.3	11.3	9.2	23.5	39.5	56.5	74.5	93	110	130	150
80%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140
85%	12.8	12.8	7.7	20	33.5	48.5	63.5	79.5	96	110	130
90%	13.5	13.5	7	18.5	31.5	45	59.5	74.5	89.5	105	120
95%	14.3	14.3	6.4	17	29	42	55.5	69.5	84	98.5	110
100%	15	15	5.9	16	27.5	39.5	52	65	79	92.5	105

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS15KHB/ E3SUPS15K3IB + 2 of E3SXR6					
			10 of E3SBTH4	11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4
5%	0.75	0.75	4300	4800	5300	5900	6400	7000
10%	1.5	1.5	1800	2100	2300	2500	2800	3000
15%	2.25	2.25	1100	1300	1400	1600	1700	1900
20%	3	3	800	900	1000	1100	1200	1300
25%	3.75	3.75	600	700	700	800	900	1000
30%	4.5	4.5	500	500	600	700	700	800
35%	5.25	5.25	400	400	500	500	600	600
40%	6	6	300	400	400	400	500	500
45%	6.75	6.75	300	300	300	400	400	500
50%	7.5	7.5	280	300	300	300	400	400
55%	8.25	8.25	250	280	300	300	300	400
60%	9	9	225	250	280	300	300	300
65%	9.75	9.75	205	225	255	280	300	300
70%	10.5	10.5	185	210	230	255	280	300
75%	11.3	11.3	170	190	210	235	255	280
80%	12	12	155	175	195	215	235	255
85%	12.8	12.8	145	165	180	200	220	240
90%	13.5	13.5	135	155	170	185	205	225
95%	14.3	14.3	125	145	160	175	190	210
100%	15	15	120	135	150	165	180	195

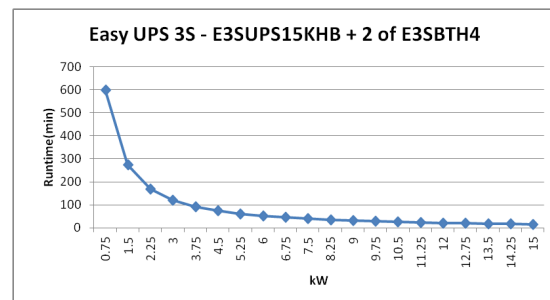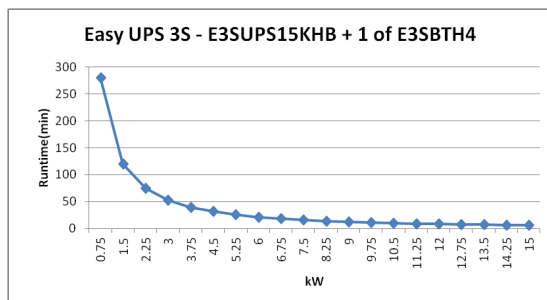

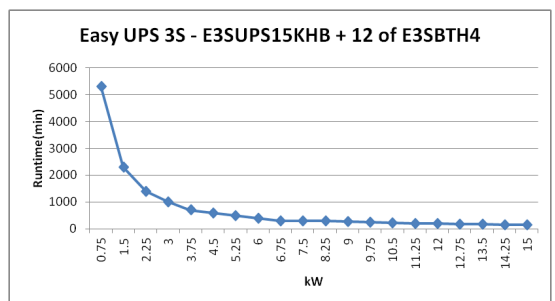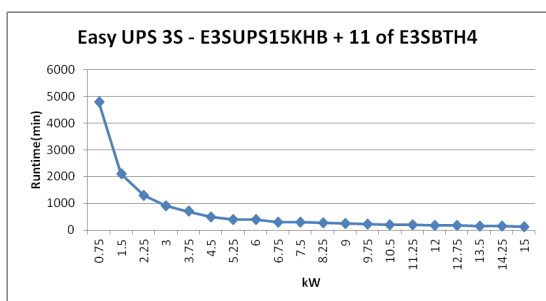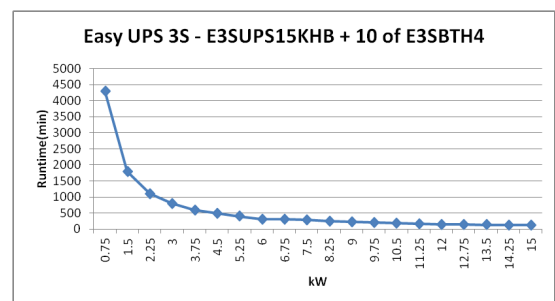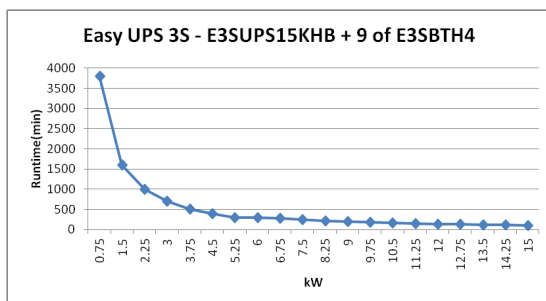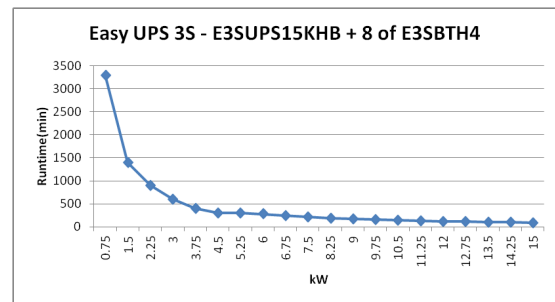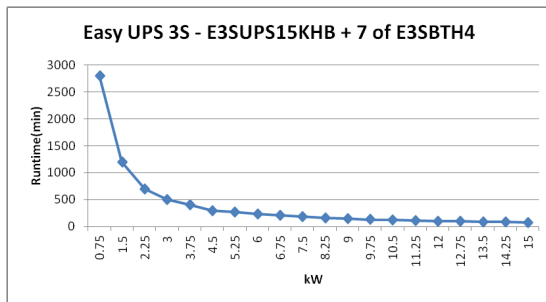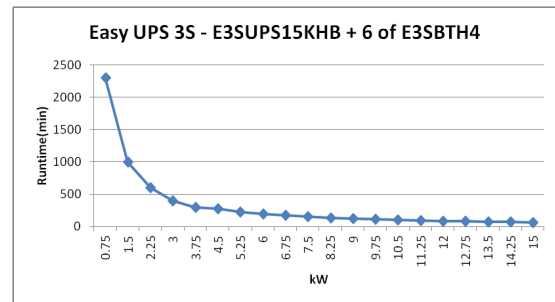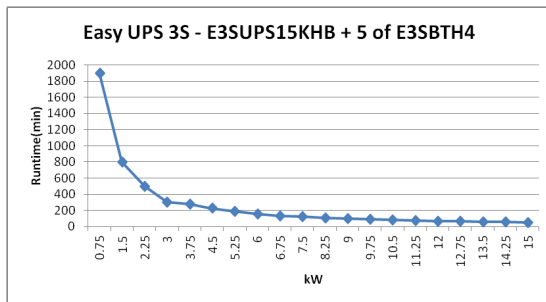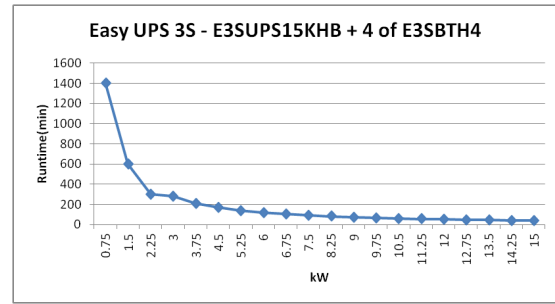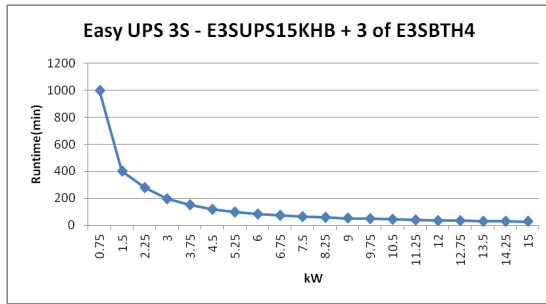

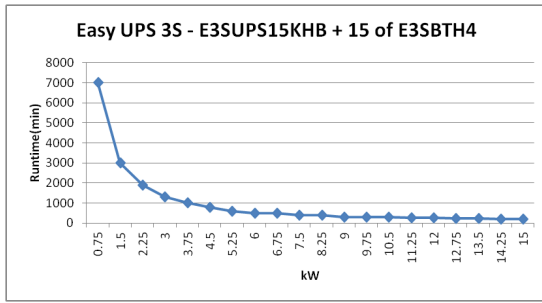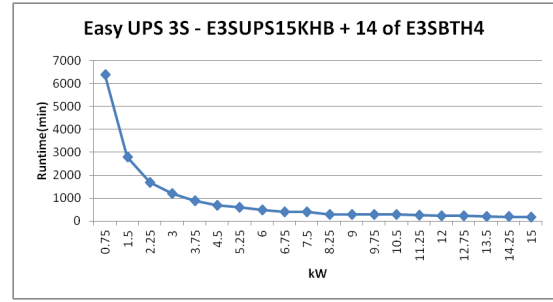
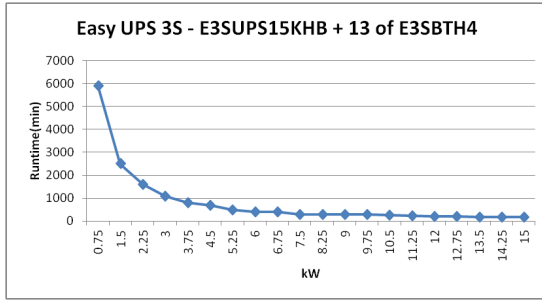












Easy UPS 3S - 15kVA – Runtime Table




UPS with battery of E3SBT4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS15KHB1/ E3SUPS15K3IB1 or E3SUPS15KHB/ E3SUPS15K3IB + 1 of E3SBT4	E3SUPS15KHB2/ E3SUPS15K3IB2 or E3SUPS15KHB/ E3SUPS15K3IB + 2 of E3SBT4	E3SUPS15KHB2/ E3SUPS15K3IB2 + 1 of E3SBT4 or E3SUPS15KHB/ E3SUPS15K3IB + 3 of E3SBT4	E3SUPS15KHB/ E3SUPS15K3IB + 1 of E3SXR6					
						4 of E3SBT4	5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4
5%	0.75	0.75	240	500	900	1200	1600	2000	2500	2900	3400
10%	1.5	1.5	100	240	300	500	700	900	1000	1200	1400
15%	2.25	2.25	63	145	240	300	400	500	600	700	900
20%	3	3	44	100	170	240	300	300	400	500	600
25%	3.75	3.75	33	79	130	185	240	300	300	400	400
30%	4.5	4.5	26	63	100	145	190	240	290	300	300
35%	5.25	5.25	21	52	86	120	160	200	240	285	300
40%	6	6	17.5	44	73	100	135	170	205	240	280
45%	6.75	6.75	15	38	63	90	115	145	175	210	240
50%	7.5	7.5	13	33	55	79	100	130	155	185	210
55%	8.25	8.25	11	29	49	70.5	92.5	115	140	165	190
60%	9	9	9.9	26	44	63	83.5	100	125	145	170
65%	9.75	9.75	8.8	23.5	39.5	57	75.5	94.5	110	135	155
70%	10.5	10.5	7.8	21	36	52	69	86.5	100	120	140
75%	11.3	11.3	7	19	33	47.5	63	79	96	110	130
80%	12	12	6.3	17.5	30.5	44	58	73	88.5	100	120
85%	12.8	12.8	5.6	16	28	40.5	54	67.5	82	96.5	110
90%	13.5	13.5	5.1	15	26	37.5	50	63	76.5	90	100
95%	14.3	14.3		13.5	24	35	47	59	71.5	84	97.5
100%	15	15		12.5	22.5	33	44	55	67	79	91.5

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS15KHB/ E3SUPS15K3IB + 2 of E3SXR6					
			10 of E3SBT4	11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4
5%	0.75	0.75	3800	4300	4800	5200	5700	6200
10%	1.5	1.5	1600	1800	2000	2300	2500	2700
15%	2.25	2.25	1000	1100	1200	1400	1500	1600
20%	3	3	700	800	900	1000	1000	1100
25%	3.75	3.75	500	600	600	700	800	900
30%	4.5	4.5	400	500	500	600	600	700
35%	5.25	5.25	300	400	400	500	500	600
40%	6	6	300	300	300	400	400	500
45%	6.75	6.75	275	300	300	300	400	400
50%	7.5	7.5	240	270	300	300	300	300
55%	8.25	8.25	215	240	265	295	300	300
60%	9	9	190	215	240	265	290	300
65%	9.75	9.75	175	195	220	240	265	285
70%	10.5	10.5	160	180	200	220	240	260
75%	11.3	11.3	145	165	185	200	220	240
80%	12	12	135	150	170	185	205	220
85%	12.8	12.8	125	140	155	175	190	205
90%	13.5	13.5	115	130	145	160	175	190
95%	14.3	14.3	110	120	135	150	165	180
100%	15	15	100	115	130	140	155	170

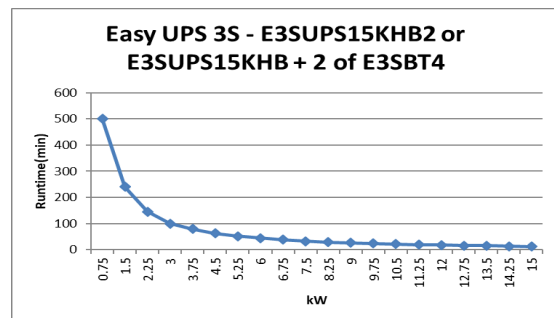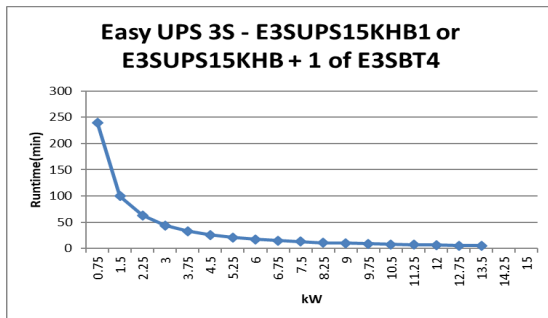

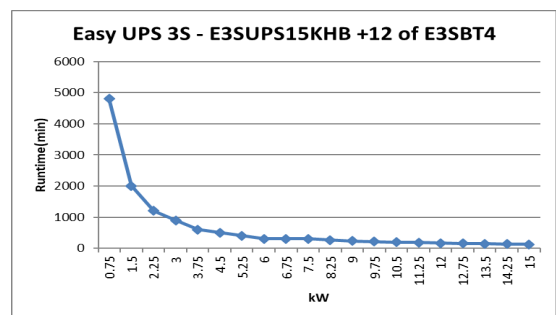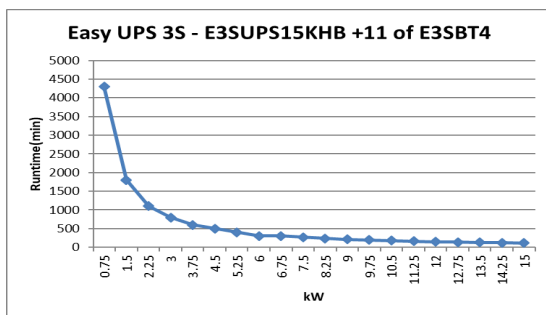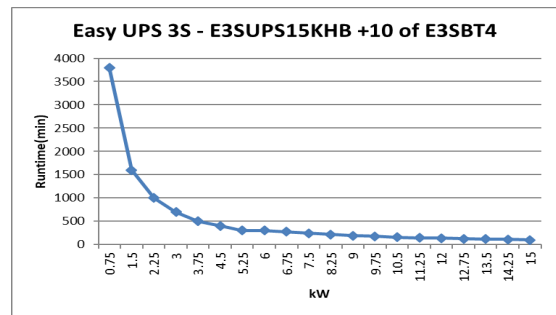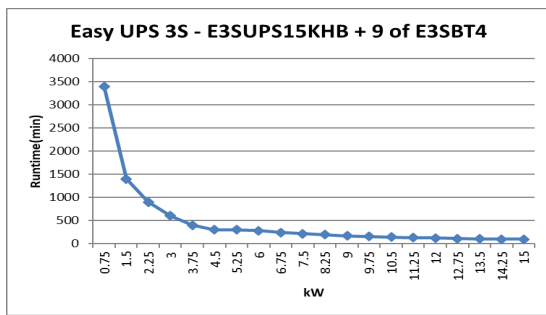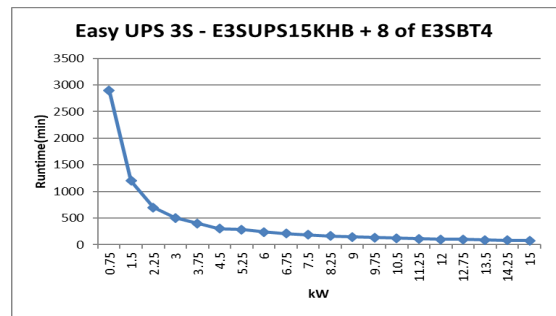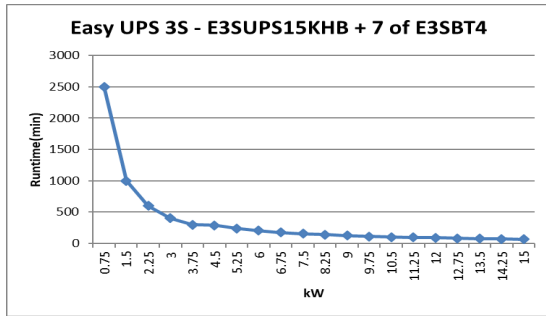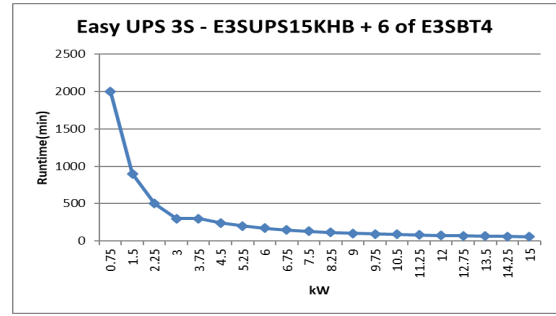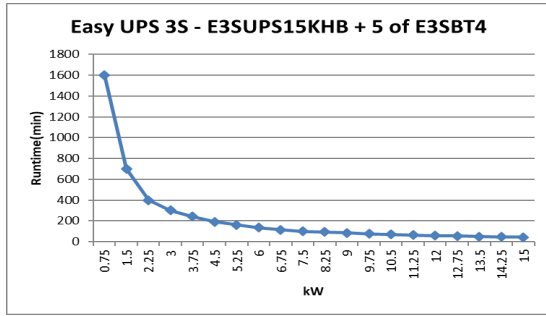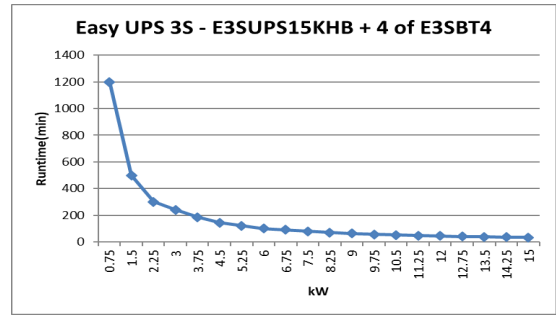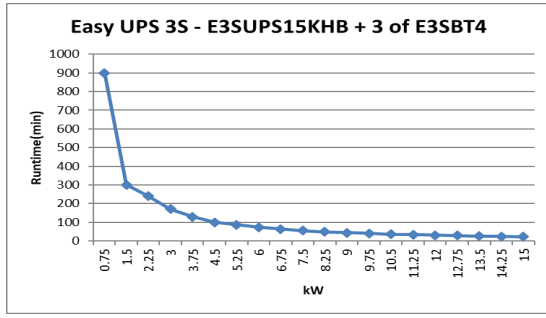

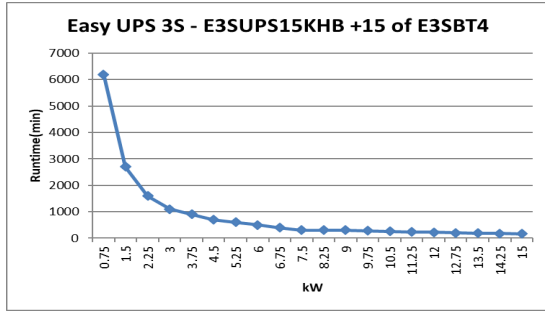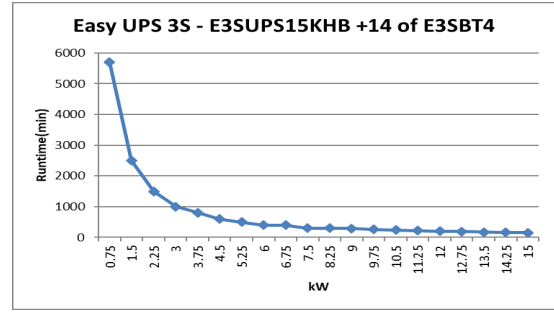
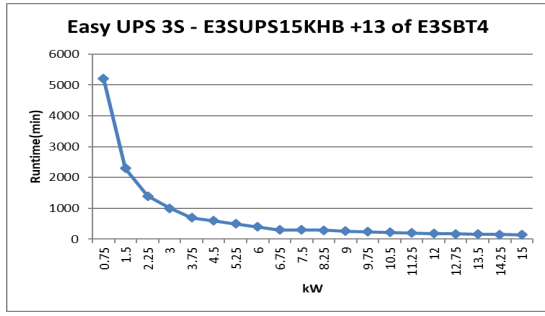












Easy UPS 3S - 20kVA – Runtime Table




UPS with battery of E3SBTH4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS20KHB/ E3SUPS20K3IB +			E3SUPS20KHB/ E3SUPS20K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4
5%	1	1	195	400	700	1000	1300	1600	2000	2300	2700
10%	2	2	85.5	195	300	400	500	700	800	1000	1100
15%	3	3	52.5	120	195	280	300	400	500	600	700
20%	4	4	36.5	86	140	195	255	300	300	400	500
25%	5	5	27.5	65.5	105	150	195	245	295	300	400
30%	6	6	21.5	52	86	120	155	195	235	280	300
35%	7	7	17.5	43	71	100	130	160	195	230	265
40%	8	8	14.5	36.5	60.5	86	110	140	165	195	225
45%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195
50%	10	10	10.5	27.5	45.5	65	85.5	105	125	150	170
55%	11	11	9.6	24.5	41	58.5	77	96	115	135	155
60%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140
65%	13	13	7.4	19.5	33	47	62	77.5	93.5	110	125
70%	14	14	6.7	17.5	30	43	57	71	86	100	115
75%	15	15	5.9	16	27.5	39.5	52	65	79	92.5	105
80%	16	16	5.4	14.5	25.5	36.5	48.5	60.5	73	86	99.5
85%	17	17		13.5	23.5	33.5	44.5	56	67.5	79.5	92
90%	18	18		12.5	21.5	31.5	41.5	52.5	63.5	74.5	86
95%	19	19		11.5	20	29.5	39	49	59	69.5	80.5
100%	20	20		10.5	19	27.5	36.5	45.5	55.5	65	75.5

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS20KHB/ E3SUPS20K3IB + 2 of E3SXR6					
			10 of E3SBTH4	11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4
5%	1	1	3000	3400	3800	4100	4500	4900
10%	2	2	1300	1500	1600	1800	2000	2100
15%	3	3	800	900	1000	1100	1200	1300
20%	4	4	500	600	700	800	800	900
25%	5	5	400	500	500	600	600	700
30%	6	6	300	400	400	400	500	500
35%	7	7	300	300	300	400	400	400
40%	8	8	255	290	300	300	300	400
45%	9	9	225	250	280	300	300	300
50%	10	10	195	220	245	270	295	300
55%	11	11	175	195	220	240	265	285
60%	12	12	155	175	195	215	235	255
65%	13	13	140	160	175	195	215	230
70%	14	14	130	145	165	180	195	215
75%	15	15	120	135	150	165	180	195
80%	16	16	110	125	140	155	165	180
85%	17	17	100	115	130	140	155	170
90%	18	18	98	110	120	130	145	160
95%	19	19	91.5	100	110	125	135	145
100%	20	20	85.5	96	105	115	125	140

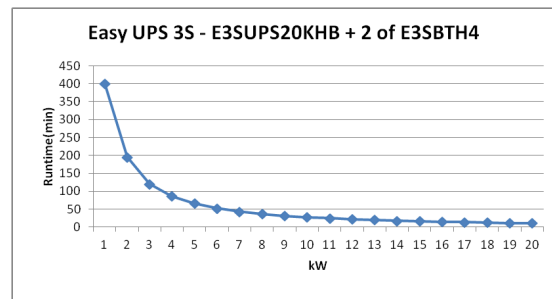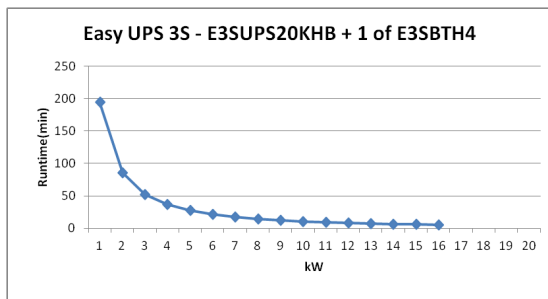

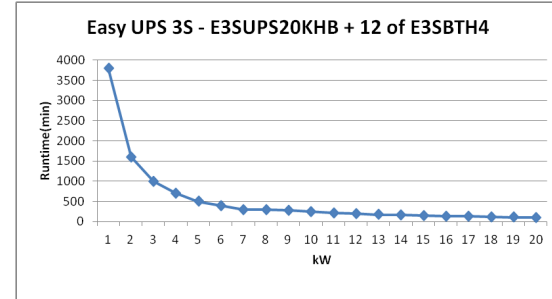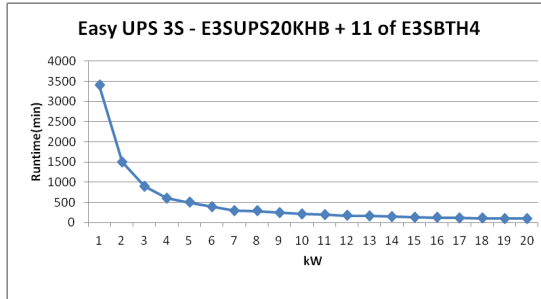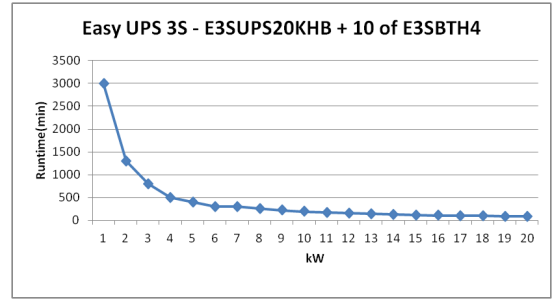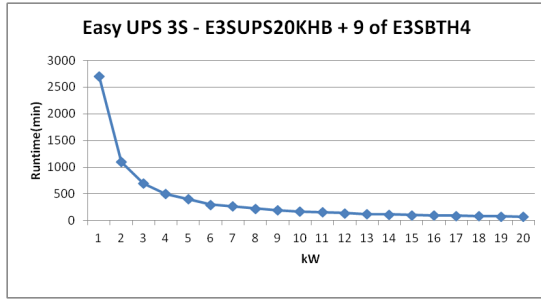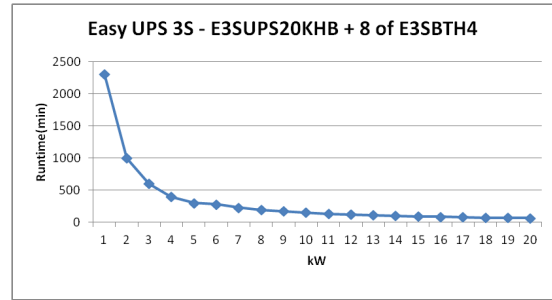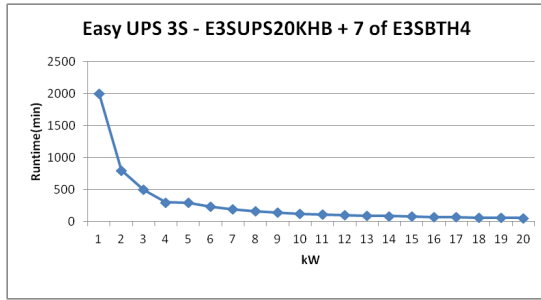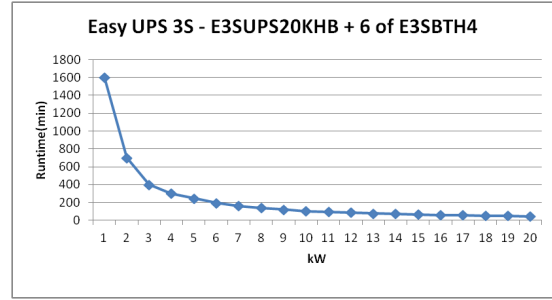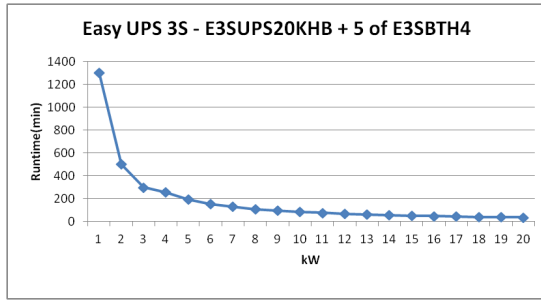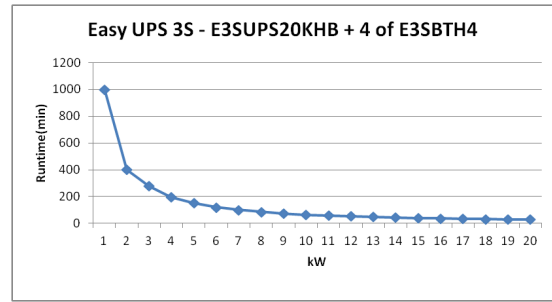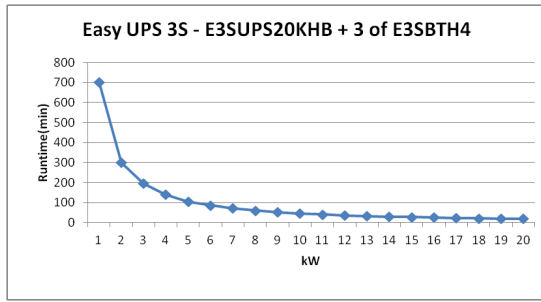

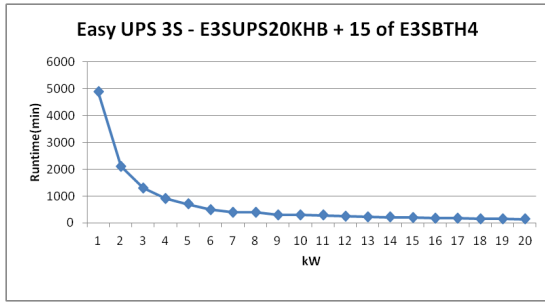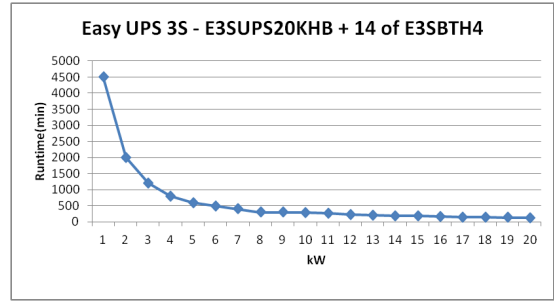
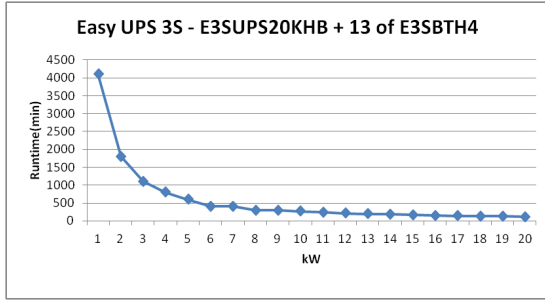












Easy UPS 3S - 20kVA – Runtime Table



UPS with battery of E3SBT4

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS20KHB1/ E3SUPS20K3IB1 or E3SUPS20KHB/ E3SUPS20K3IB + 2 of E3SBT4	E3SUPS20KHB2/ E3SUPS20K3IB2 or E3SUPS20KHB/ E3SUPS20K3IB + 3 of E3SBT4	E3SUPS20KHB/ E3SUPS20K3IB + 1 of E3SXR6						
					4 of E3SBT4	5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4	
5%	1	1	300	600	900	1100	1400	1700	2000	2400	
10%	2	2	170	275	300	500	600	700	900	1000	
15%	3	3	100	170	240	300	300	400	500	600	
20%	4	4	73	120	170	220	280	300	300	400	
25%	5	5	55.5	91.5	130	170	210	255	300	300	
30%	6	6	44	73	100	135	170	205	240	280	
35%	7	7	36	60	86	110	140	170	200	230	
40%	8	8	30	51	73	96	120	145	170	195	
45%	9	9	26	44	63	83.5	100	125	145	170	
50%	10	10	22.5	38.5	55	73	91.5	110	130	150	
55%	11	11	20	34	49	65	81.5	99	115	130	
60%	12	12	17.5	30.5	44	58	73	88.5	100	120	
65%	13	13	15.5	27	39.5	52.5	66	80	94	105	
70%	14	14	14	24.5	36	48	60.5	73	86.5	100	
75%	15	15	12.5	22.5	33	44	55	67	79	91.5	
80%	16	16	11.5	20.5	30.5	40.5	51	62	73	84.5	
85%	17	17	10.5	19	28	37.5	47	57.5	67.5	78.5	
90%	18	18	9.9	17.5	26	35	44	53.5	63.5	73.5	
95%	19	19	9.1	16.5	24	32.5	41	50	59	68.5	
100%	20	20	8.4	15	22.5	30	38.5	46.5	55	64	

Runtime estimation in minutes								
% of load	kVA	kW	E3SUPS20KHB/ E3SUPS20K3IB + 2 of E3SXR6					
			10 of E3SBT4	11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4
5%	1	1	2700	3000	3300	3700	4000	4400
10%	2	2	1100	1300	1400	1600	1700	1900
15%	3	3	700	800	900	1000	1000	1100
20%	4	4	500	500	600	700	700	800
25%	5	5	300	400	400	500	500	600
30%	6	6	300	300	300	400	400	500
35%	7	7	260	295	300	300	300	400
40%	8	8	220	250	275	300	300	300
45%	9	9	190	215	240	265	290	300
50%	10	10	170	190	210	235	255	275
55%	11	11	150	170	190	210	230	250
60%	12	12	135	150	170	185	205	220
65%	13	13	120	135	150	170	185	200
70%	14	14	110	125	140	155	170	185
75%	15	15	100	115	130	140	155	170
80%	16	16	96.5	105	120	130	145	155
85%	17	17	89.5	100	110	120	135	145
90%	18	18	83.5	94	100	115	125	135
95%	19	19	78	87.5	97.5	105	115	125
100%	20	20	73	82	91.5	100	110	120

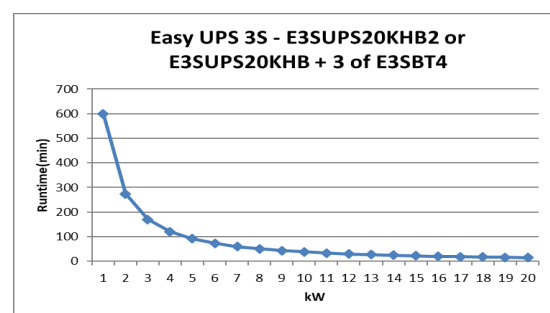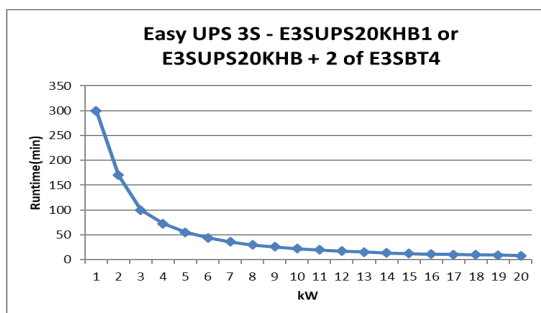

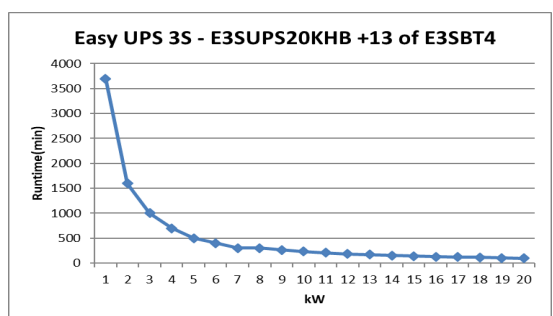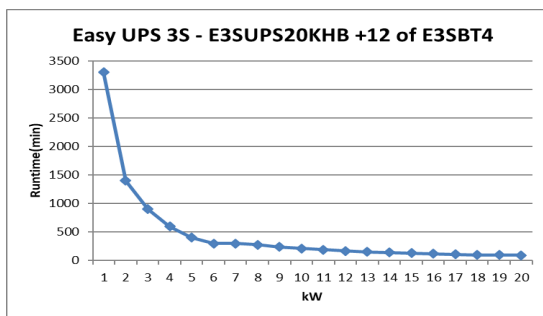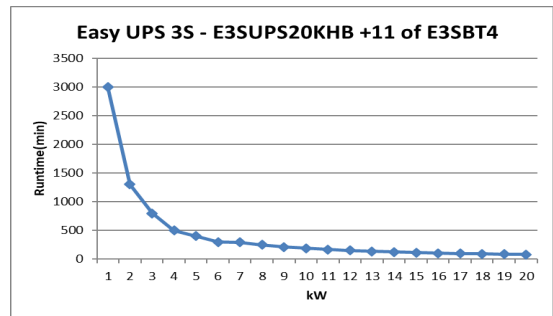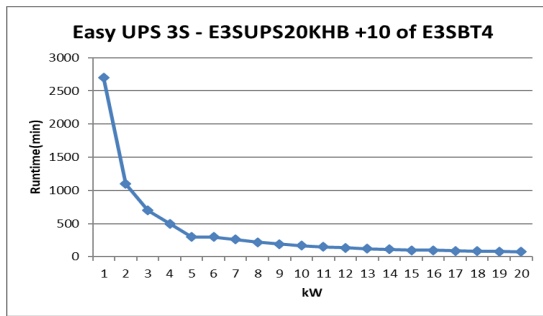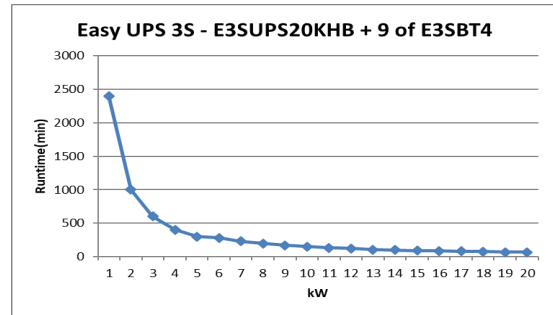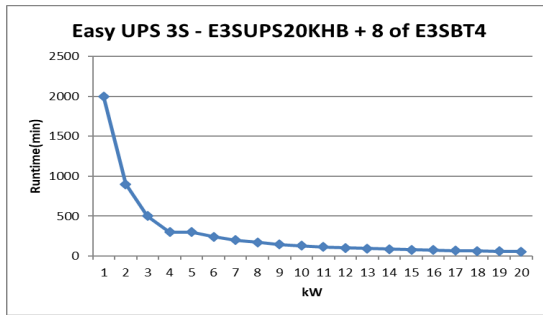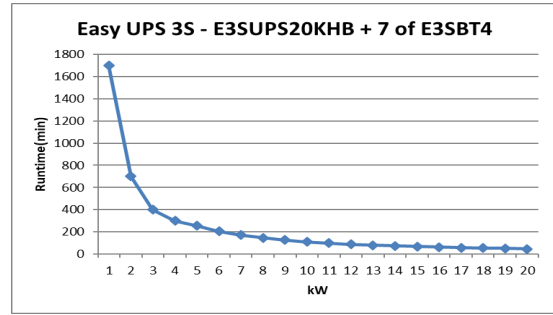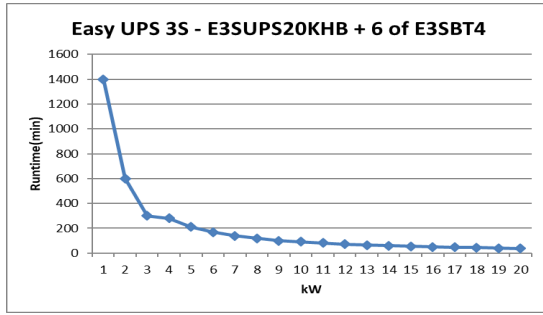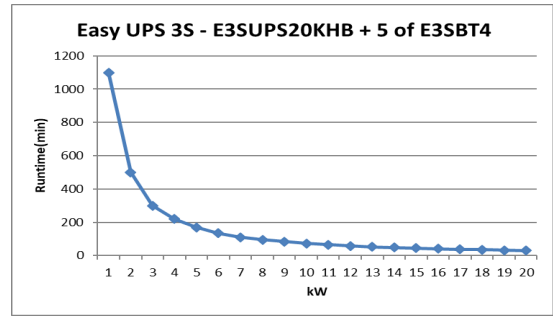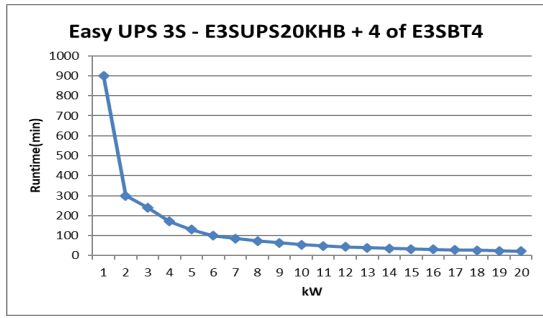

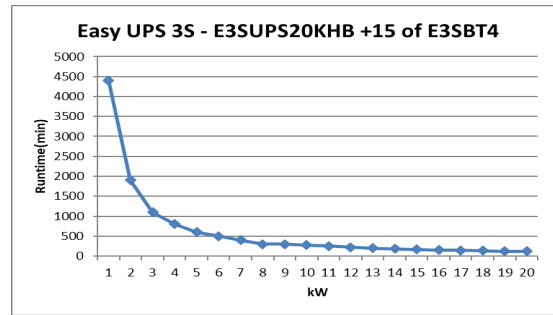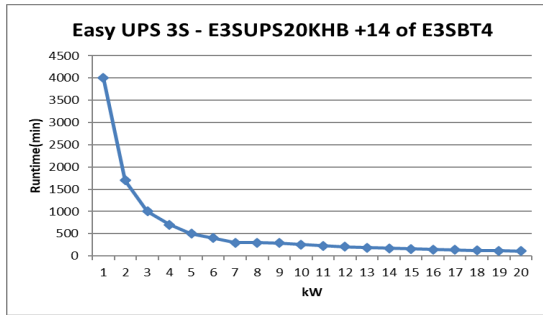











Easy UPS 3S - 30kVA – Runtime Table











UPS with battery of E3SBTH4









Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB +				E3SUPS30KHB/ E3SUPS30K3IB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4	10 of E3SBTH4
5%	1.5	1.5	120	275	400	600	800	1000	1200	1400	1600	1800
10%	3	3	52.5	120	195	280	300	400	500	600	700	800
15%	4.5	4.5	31.5	74.5	120	170	225	280	300	300	400	500
20%	6	6	21.5	52	86	120	155	195	235	280	300	300
25%	7.5	7.5	16	39.5	65.5	93	120	150	180	210	245	280
30%	9	9	12.5	31.5	52	74.5	97.5	120	145	170	195	225
35%	10.5	10.5	10	26	43	61.5	81	100	120	140	165	185
40%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140	155
45%	13.5	13.5	7	18.5	31.5	45	59.5	74.5	89.5	105	120	135
50%	15	15	5.9	16	27.5	39.5	52	65	79	92.5	105	120
55%	16.5	16.5	5.1	14	24	35	46	58	70	82.5	95	105
60%	18	18		12.5	21.5	31.5	41.5	52.5	63.5	74.5	86	98
65%	19.5	19.5		11	19.5	28.5	37.5	47.5	57.5	67.5	78	88.5
70%	21	21		10	17.5	26	34.5	43	52.5	61.5	71	81
75%	22.5	22.5		9.2	16	23.5	31.5	39.5	48	56.5	65.5	74.5
80%	24	24		8.4	14.5	21.5	29	36.5	44	52	60.5	68.5
85%	25.5	25.5		7.7	13.5	20	26.5	33.5	41	48.5	56	63.5
90%	27	27		7	12.5	18.5	25	31.5	38	45	52	59.5
95%	28.5	28.5		6.4	11.5	17	23	29	35.5	42	48.5	55.5
100%	30	30		6	11	16	21.5	27.5	33.5	39.5	46	52.5

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 2 of E3SXR6						E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SXR6		
			11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4	16 of E3SBTH4	17 of E3SBTH4	18 of E3SBTH4	19 of E3SBTH4
5%	1.5	1.5	2100	2300	2500	2800	3000	3300	3500	3800	4000
10%	3	3	900	1000	1100	1200	1300	1400	1500	1600	1700
15%	4.5	4.5	500	600	700	700	800	900	900	1000	1100
20%	6	6	400	400	400	500	500	600	600	700	700
25%	7.5	7.5	300	300	300	400	400	400	500	500	600
30%	9	9	250	280	300	300	300	300	400	400	400
35%	10.5	10.5	210	230	255	280	300	300	300	300	400
40%	12	12	175	195	215	235	255	280	300	300	300
45%	13.5	13.5	155	170	185	205	225	240	260	275	295
50%	15	15	135	150	165	180	195	210	230	245	260
55%	16.5	16.5	120	135	145	160	175	190	205	215	230
60%	18	18	110	120	130	145	160	170	185	195	210
65%	19.5	19.5	99.5	110	120	130	145	155	165	180	190
70%	21	21	91	100	110	120	130	140	150	165	175
75%	22.5	22.5	83.5	93	100	110	120	130	140	150	160
80%	24	24	77	86	94.5	100	110	120	130	140	145
85%	25.5	25.5	71.5	79.5	88	96	100	110	120	130	135
90%	27	27	67	74.5	82	89.5	97.5	105	110	120	130
95%	28.5	28.5	62.5	69.5	76.5	84	91	98.5	105	110	120
100%	30	30	59	65.5	72	79	86	93	100	105	110

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SXR6			E3SUPS30KHB/ E3SUPS30K3IB + 4 of E3SXR6					
			20 of E3SBTH4	21 of E3SBTH4	22 of E3SBTH4	23 of E3SBTH4	24 of E3SBTH4	25 of E3SBTH4	26 of E3SBTH4	27 of E3SBTH4	28 of E3SBTH4
5%	1.5	1.5	4300	4500	4800	5100	5300	5600	5900	6100	6400
10%	3	3	1900	2000	2100	2200	2300	2400	2600	2700	2800
15%	4.5	4.5	1100	1200	1300	1300	1400	1500	1600	1600	1700
20%	6	6	800	800	900	900	1000	1000	1100	1100	1200
25%	7.5	7.5	600	600	700	700	700	800	800	900	900
30%	9	9	500	500	500	600	600	600	700	700	700
35%	10.5	10.5	400	400	400	500	500	500	500	600	600
40%	12	12	300	300	400	400	400	400	400	500	500
45%	13.5	13.5	300	300	300	300	300	400	400	400	400
50%	15	15	275	295	300	300	300	300	300	400	400
55%	16.5	16.5	245	260	275	290	300	300	300	300	300
60%	18	18	225	235	250	265	280	295	300	300	300
65%	19.5	19.5	205	215	225	240	255	265	280	290	300
70%	21	21	185	195	210	220	230	240	255	265	280
75%	22.5	22.5	170	180	190	200	210	225	235	245	255
80%	24	24	155	165	175	185	195	205	215	225	235
85%	25.5	25.5	145	155	165	175	180	190	200	210	220
90%	27	27	135	145	155	160	170	180	185	195	205
95%	28.5	28.5	125	135	145	150	160	165	175	185	190
100%	30	30	120	125	135	140	150	155	165	175	180

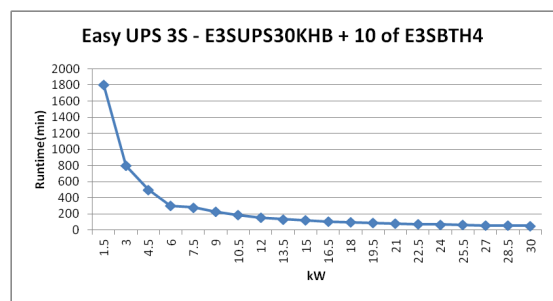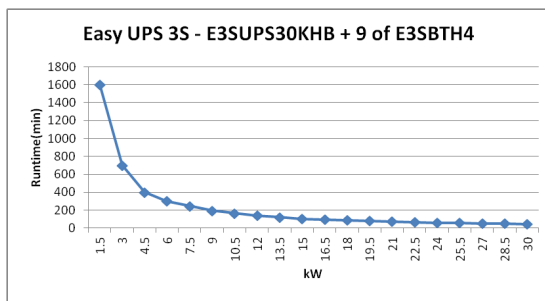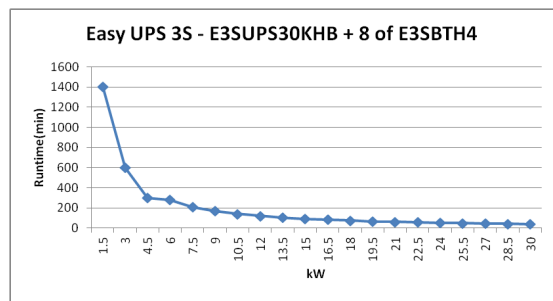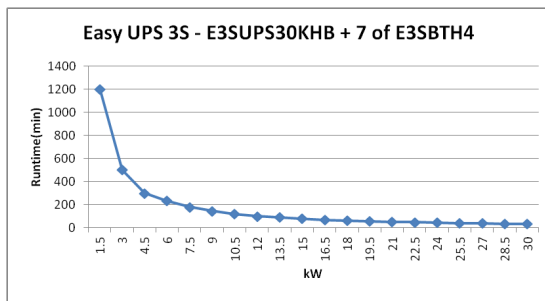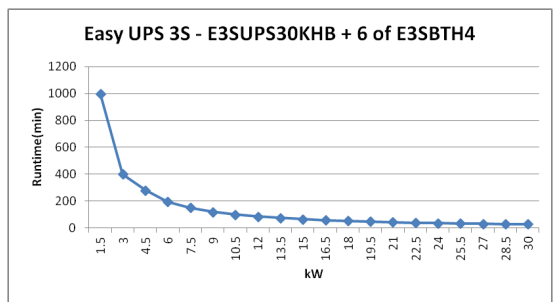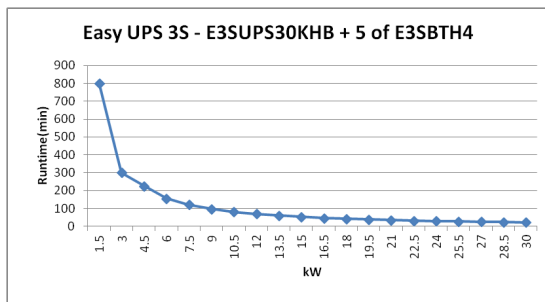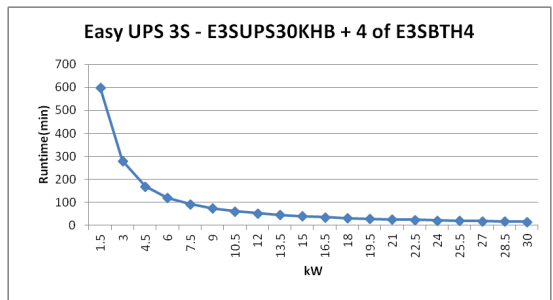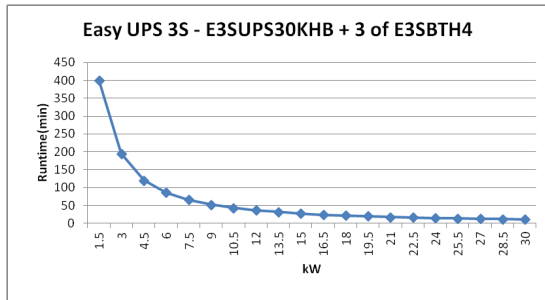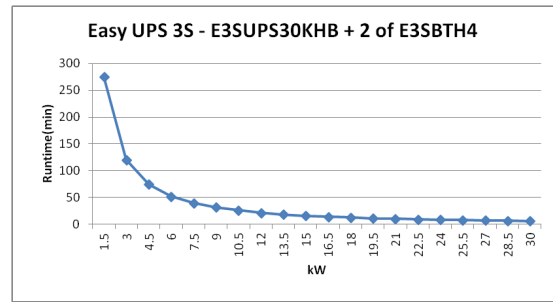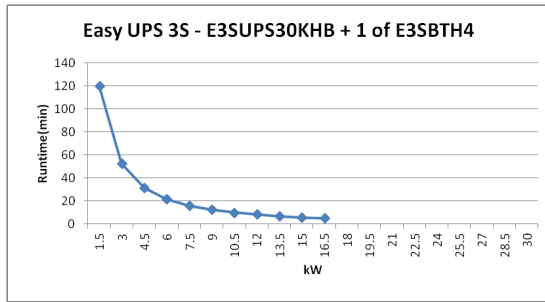

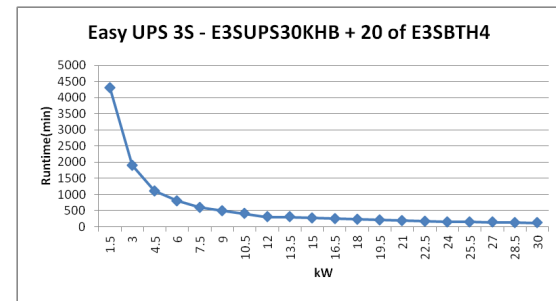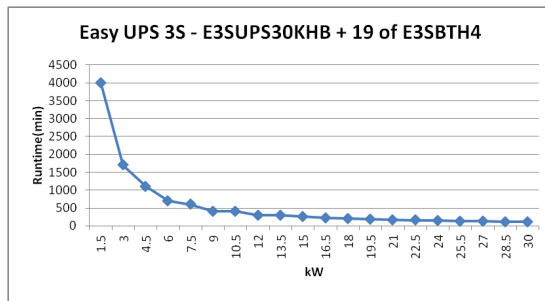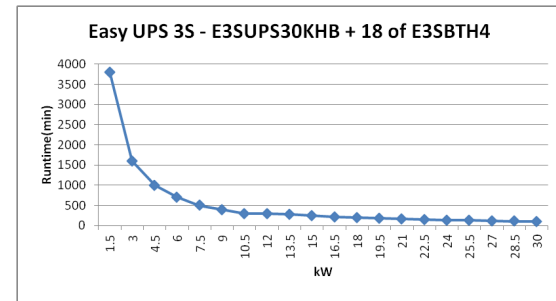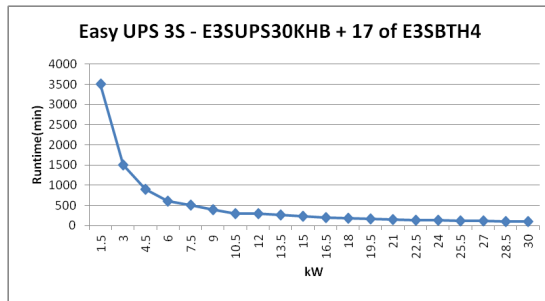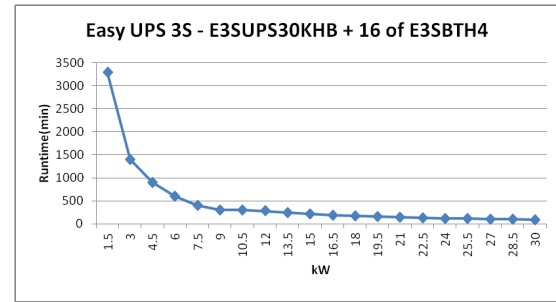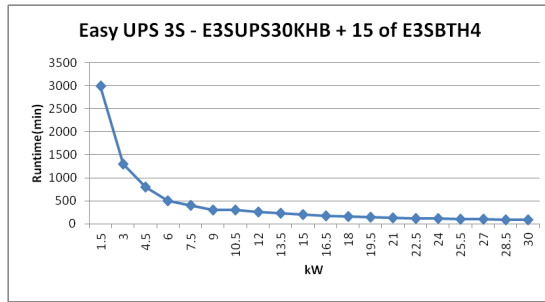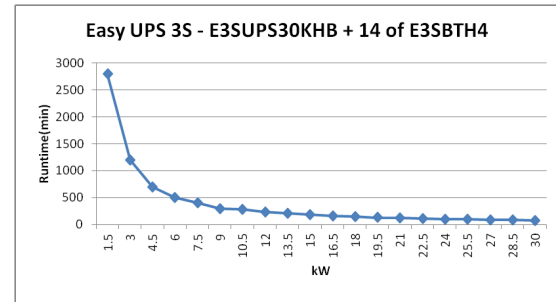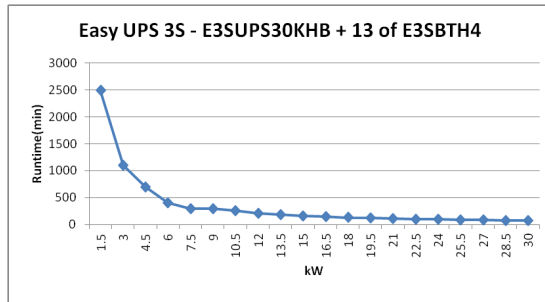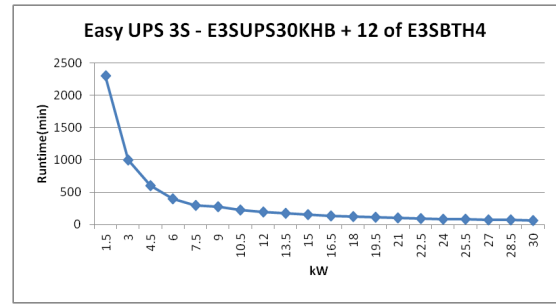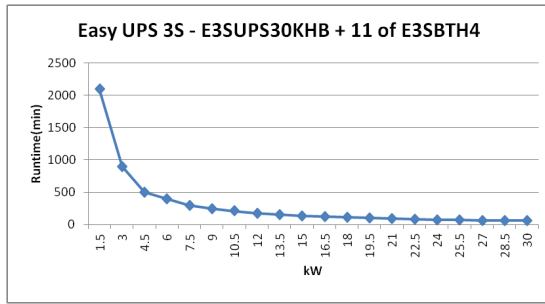

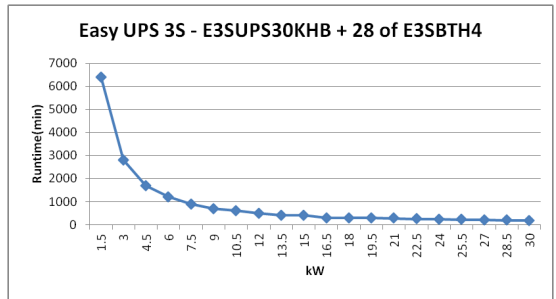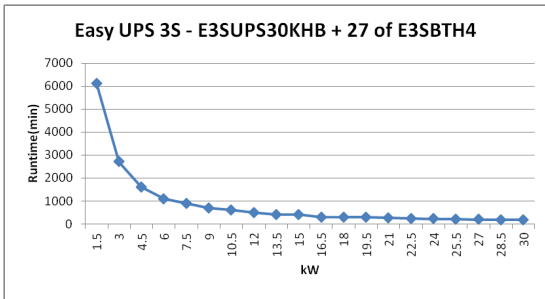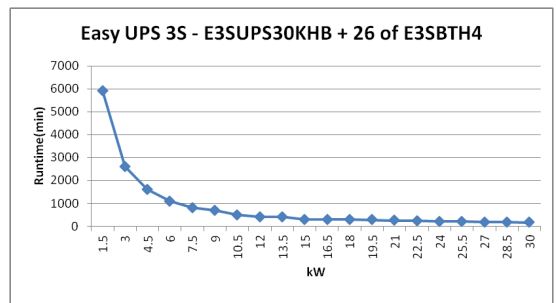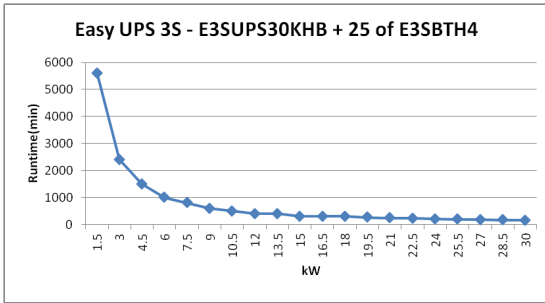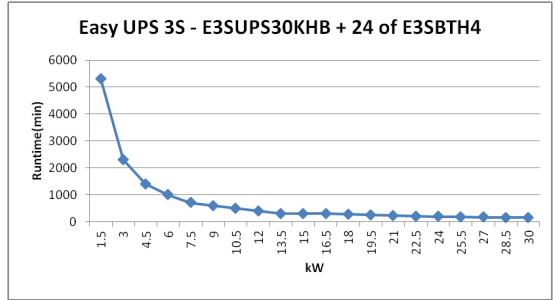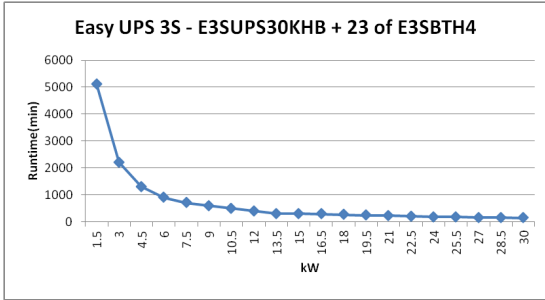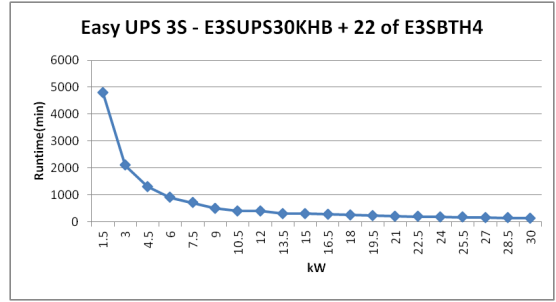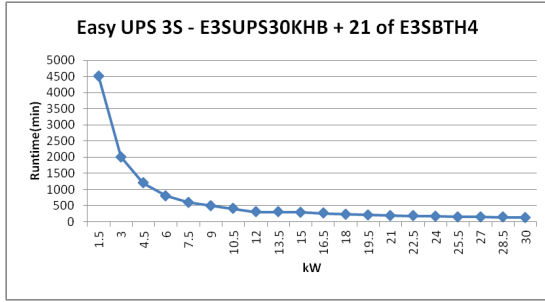











Easy UPS 3S - 30kVA – Runtime Table











UPS with battery of E3SBT4








Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB1/ E3SUPS30K3IB1 or E3SUPS30KHB/ E3SUPS30K3IB + 2 of E3SBT4	E3SUPS30KHB1/ E3SUPS30K3IB1 + 1 of E3SBT4 or E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SBT4	E3SUPS30KHB2/ E3SUPS30K3IB2 or E3SUPS30KHB/ E3SUPS30K3IB + 4 of E3SBT4	E3SUPS30KHB/ E3SUPS30K3IB + 1 of E3SXR6					
						5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4	10 of E3SBT4
5%	1.5	1.5	240	300	500	700	900	1000	1200	1400	1600
10%	3	3	100	170	240	300	300	400	500	600	700
15%	4.5	4.5	63	100	145	190	240	290	300	300	400
20%	6	6	44	73	100	135	170	205	240	280	300
25%	7.5	7.5	33	55	79	100	130	155	185	210	240
30%	9	9	26	44	63	83.5	100	125	145	170	190
35%	10.5	10.5	21	36	52	69	86.5	100	120	140	160
40%	12	12	17.5	30.5	44	58	73	88.5	100	120	135
45%	13.5	13.5	15	26	37.5	50	63	76.5	90	100	115
50%	15	15	12.5	22.5	33	44	55	67	79	91.5	100
55%	16.5	16.5	11	19.5	29	38.5	49	59.5	70	81	92.5
60%	18	18	9.9	17.5	26	35	44	53.5	63.5	73.5	83.5
65%	19.5	19.5	8.8	15.5	23.5	31.5	39.5	48.5	57	66.5	75.5
70%	21	21	7.8	14	21	28.5	36	44	52	60.5	69
75%	22.5	22.5	7	13	19	26	33	40	47.5	55.5	63
80%	24	24	6.3	11.5	17.5	24	30.5	37	44	51	58
85%	25.5	25.5	5.6	10.5	16	22	28	34	40.5	47	54
90%	27	27	5.1	9.9	15	20.5	26	31.5	37.5	44	50
95%	28.5	28.5		9.1	13.5	19	24	29.5	35	41	47
100%	30	30		8.4	13	17.5	22.5	27.5	33	38.5	44

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 2 of E3SXR6						E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SXR6		
			11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4	16 of E3SBT4	17 of E3SBT4	18 of E3SBT4	19 of E3SBT4
5%	1.5	1.5	1800	2000	2300	2500	2700	2900	3100	3300	3600
10%	3	3	800	900	1000	1000	1100	1200	1300	1400	1500
15%	4.5	4.5	500	500	600	600	700	700	800	900	900
20%	6	6	300	300	400	400	500	500	600	600	600
25%	7.5	7.5	270	300	300	300	300	400	400	400	500
30%	9	9	215	240	265	290	300	300	300	300	400
35%	10.5	10.5	180	200	220	240	260	285	300	300	300
40%	12	12	150	170	185	205	220	240	260	280	295
45%	13.5	13.5	130	145	160	175	190	210	225	240	255
50%	15	15	115	130	140	155	170	185	195	210	225
55%	16.5	16.5	100	115	125	135	150	160	175	185	200
60%	18	18	94	100	115	125	135	145	160	170	180
65%	19.5	19.5	85	94.5	100	110	120	135	145	155	165
70%	21	21	77.5	86.5	95.5	100	110	120	130	140	150
75%	22.5	22.5	71	79	87.5	96	100	110	120	130	135
80%	24	24	65.5	73	80.5	88.5	96.5	100	110	120	125
85%	25.5	25.5	60.5	67.5	75	82	89.5	96.5	100	110	115
90%	27	27	56.5	63	69.5	76.5	83	90	97	100	110
95%	28.5	28.5	52.5	59	65	71.5	77.5	84	91	97.5	100
100%	30	30	49.5	55.5	61	67	73	79.5	85.5	91.5	98

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS30KHB/ E3SUPS30K3IB + 3 of E3SXR6			E3SUPS30KHB/ E3SUPS30K3IB + 4 of E3SXR6					
			20 of E3SBT4	21 of E3SBT4	22 of E3SBT4	23 of E3SBT4	24 of E3SBT4	25 of E3SBT4	26 of E3SBT4	27 of E3SBT4	28 of E3SBT4
5%	1.5	1.5	3800	4000	4300	4500	4700	5000	5200	5500	5700
10%	3	3	1600	1700	1800	1900	2000	2200	2300	2400	2500
15%	4.5	4.5	1000	1000	1100	1200	1200	1300	1400	1400	1500
20%	6	6	700	700	800	800	900	900	1000	1000	1000
25%	7.5	7.5	500	500	600	600	600	700	700	800	800
30%	9	9	400	400	500	500	500	500	600	600	600
35%	10.5	10.5	300	300	400	400	400	400	500	500	500
40%	12	12	300	300	300	300	300	400	400	400	400
45%	13.5	13.5	275	290	300	300	300	300	300	300	400
50%	15	15	240	255	270	285	300	300	300	300	300
55%	16.5	16.5	215	225	240	255	265	280	295	300	300
60%	18	18	195	205	215	230	240	255	265	280	290
65%	19.5	19.5	175	185	195	205	220	230	240	250	265
70%	21	21	160	170	180	190	200	210	220	230	240
75%	22.5	22.5	145	155	165	175	185	190	200	210	220
80%	24	24	135	145	150	160	170	180	185	195	205
85%	25.5	25.5	125	135	140	150	155	165	175	180	190
90%	27	27	115	125	130	140	145	155	160	170	175
95%	28.5	28.5	110	115	120	130	135	145	150	160	165
100%	30	30	100	110	115	120	130	135	140	150	155

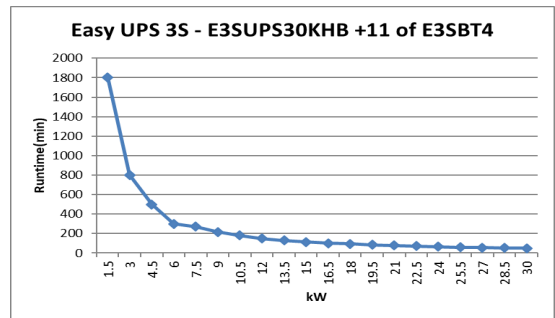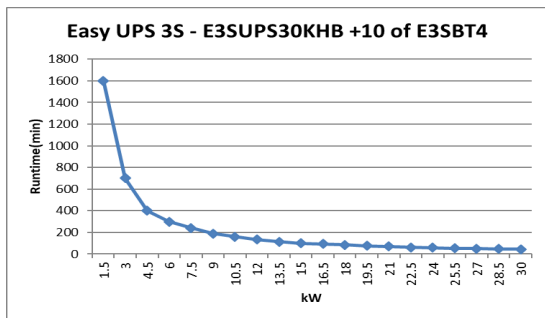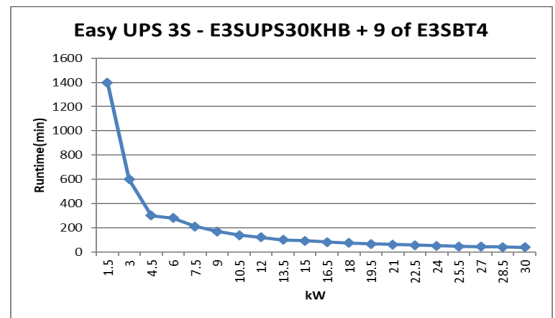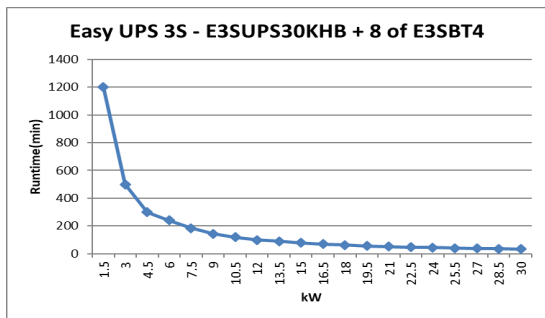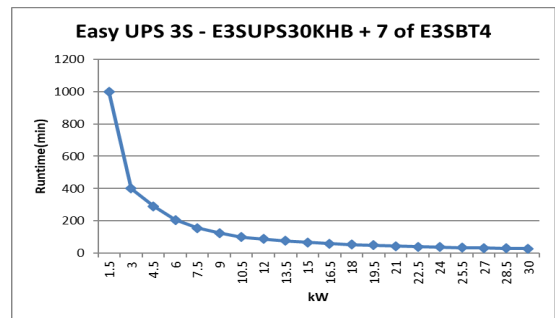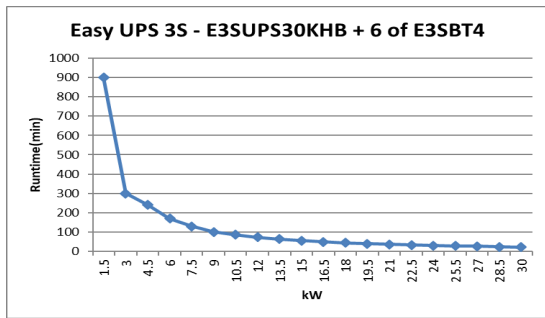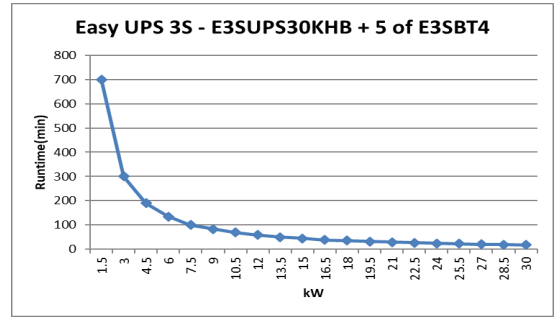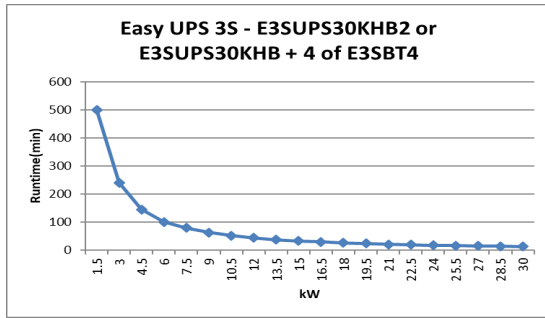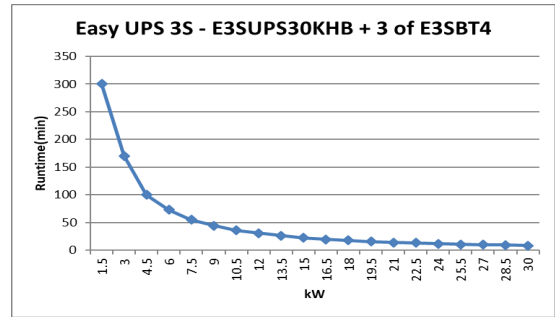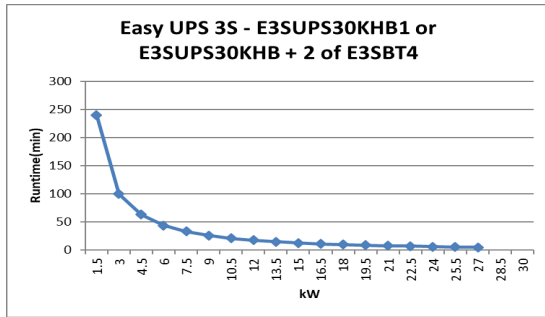

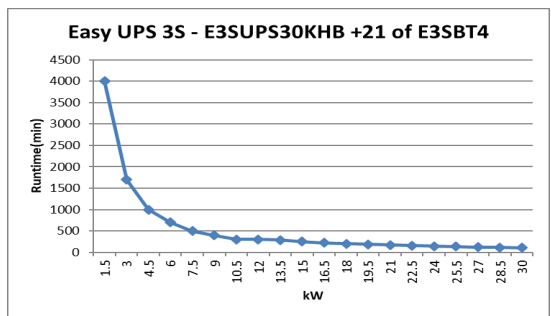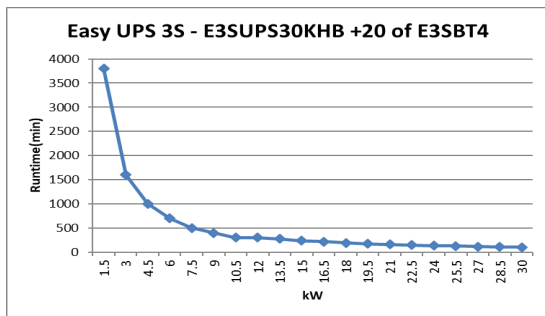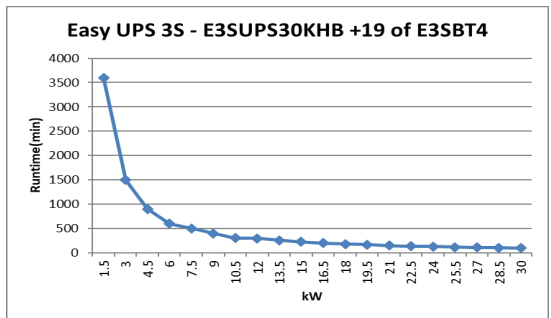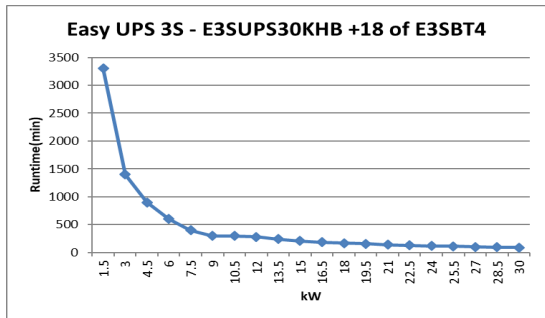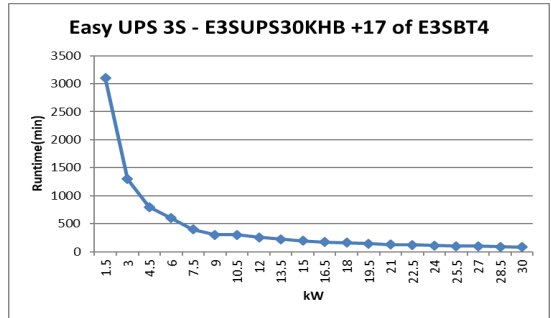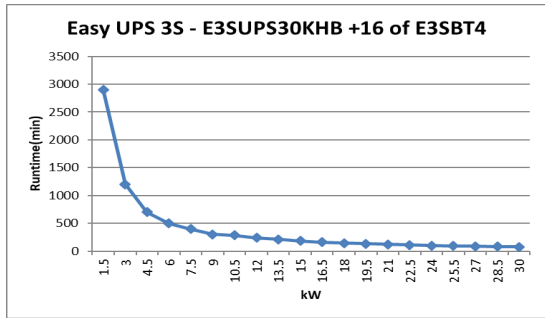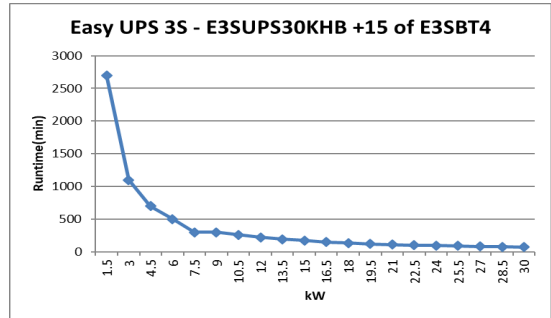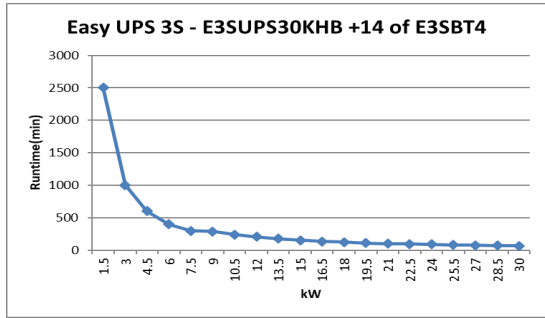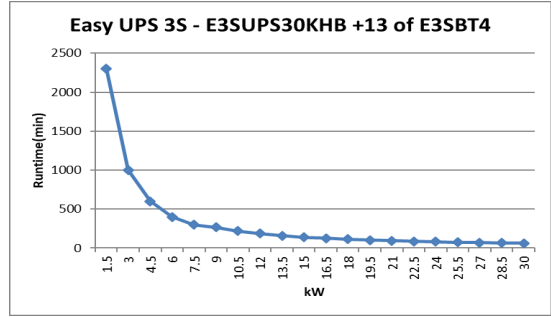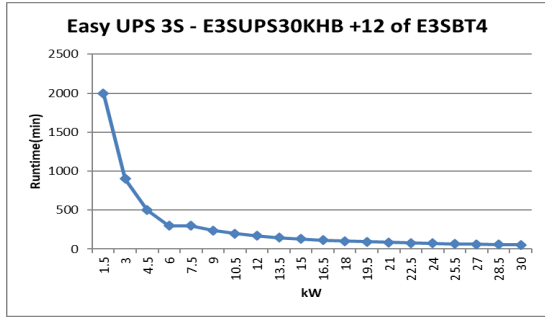

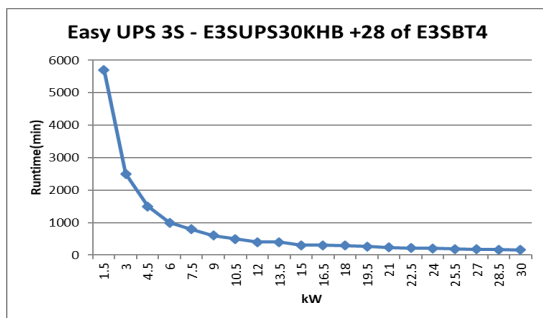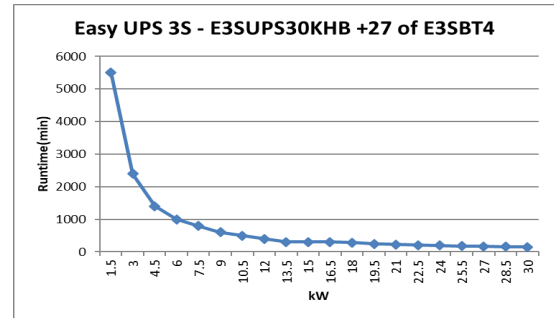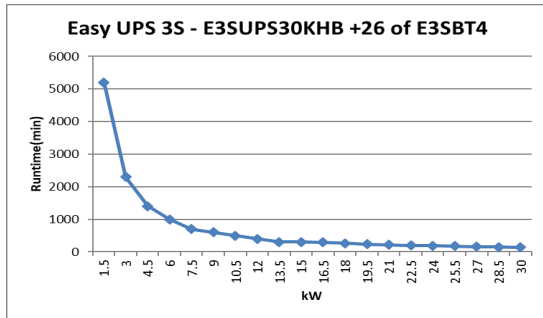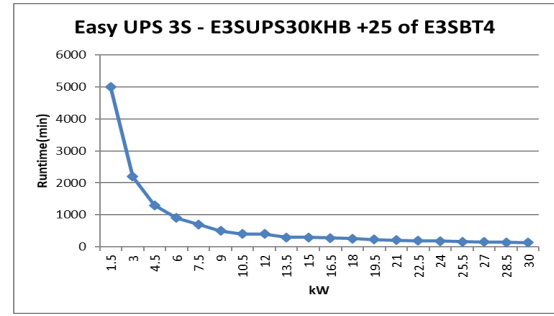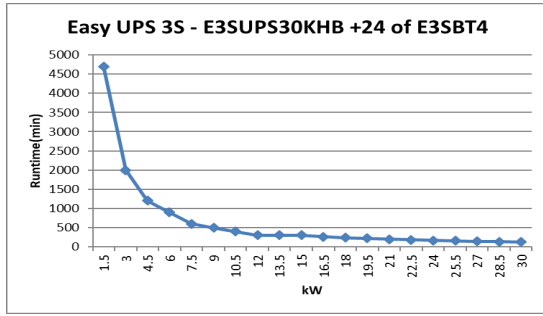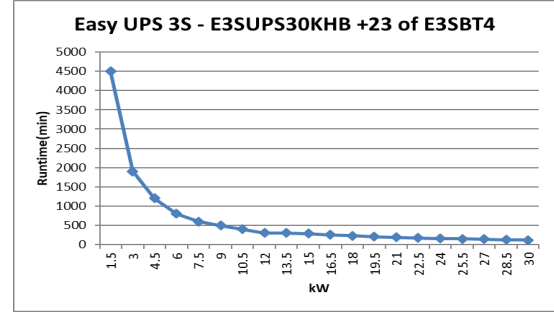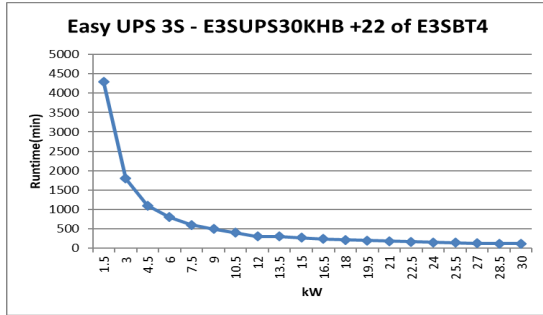











Easy UPS 3S - 40kVA – Runtime Table











UPS with battery of E3SBTH4









Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS40KHB +				E3SUPS40KHB + 1 of E3SXR6					
			1 of E3SBTH4	2 of E3SBTH4	3 of E3SBTH4	4 of E3SBTH4	5 of E3SBTH4	6 of E3SBTH4	7 of E3SBTH4	8 of E3SBTH4	9 of E3SBTH4	10 of E3SBTH4
5%	2	2	85.5	195	300	400	500	700	800	1000	1100	1300
10%	4	4	36.5	86	140	195	255	300	300	400	500	500
15%	6	6	21.5	52	86	120	155	195	235	280	300	300
20%	8	8	14.5	36.5	60.5	86	110	140	165	195	225	255
25%	10	10	10.5	27.5	45.5	65	85.5	105	125	150	170	195
30%	12	12	8.4	21.5	36.5	52	68.5	86	100	120	140	155
35%	14	14	6.7	17.5	30	43	57	71	86	100	115	130
40%	16	16	5.4	14.5	25.5	36.5	48.5	60.5	73	86	99.5	110
45%	18	18		12.5	21.5	31.5	41.5	52.5	63.5	74.5	86	98
50%	20	20		10.5	19	27.5	36.5	45.5	55.5	65	75.5	85.5
55%	22	22		9.5	16.5	24	32	40.5	49	58	67	76.5
60%	24	24		8.4	14.5	21.5	29	36.5	44	52	60.5	68.5
65%	26	26		7.5	13	19.5	26	33	40	47.5	54.5	62.5
70%	28	28		6.7	12	17.5	23.5	30	36.5	43	50	57
75%	30	30		6	11	16	21.5	27.5	33.5	39.5	46	52.5
80%	32	32		5.3	10	14.5	20	25	30.5	36.5	42	48
85%	34	34			9.1	13.5	18.5	23.5	28.5	33.5	39	44.5
90%	36	36			8.4	12.5	17	21.5	26.5	31.5	36.5	41.5
95%	38	38			7.8	11.5	16	20	24.5	29.5	34	39
100%	40	40			7.2	11	14.5	19	23	27.5	32	36.5

Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS40KHB + 2 of E3SXR6						E3SUPS40KHB + 3 of E3SXR6			
			11 of E3SBTH4	12 of E3SBTH4	13 of E3SBTH4	14 of E3SBTH4	15 of E3SBTH4	16 of E3SBTH4	17 of E3SBTH4	18 of E3SBTH4	19 of E3SBTH4	
5%	2	2	1500	1600	1800	2000	2100	2300	2500	2700	2800	
10%	4	4	600	700	800	800	900	1000	1100	1100	1200	1200
15%	6	6	400	400	400	500	500	600	600	700	700	700
20%	8	8	290	300	300	300	400	400	400	500	500	500
25%	10	10	220	245	270	295	300	300	300	400	400	400
30%	12	12	175	195	215	235	255	280	300	300	300	300
35%	14	14	145	165	180	195	215	230	250	265	285	
40%	16	16	125	140	155	165	180	195	210	225	240	
45%	18	18	110	120	130	145	160	170	185	195	210	
50%	20	20	96	105	115	125	140	150	160	170	185	
55%	22	22	86	95.5	105	115	125	135	145	155	165	
60%	24	24	77	86	94.5	100	110	120	130	140	145	
65%	26	26	70	78	86	94	100	110	115	125	135	
70%	28	28	64	71	78.5	86	93.5	100	105	115	120	
75%	30	30	59	65.5	72	79	86	93	100	105	110	
80%	32	32	54	60.5	66.5	73	79	85.5	92.5	99	105	
85%	34	34	50.5	56	62	67.5	73.5	79.5	86	92	98	
90%	36	36	47	52	57.5	63	68.5	74.5	80	86	91.5	
95%	38	38	44	49	54	59	64.5	69.5	75	80.5	86	
100%	40	40	41	46	50.5	55.5	60.5	65.5	70.5	75.5	80.5	

Runtime estimation in minutes												
% of load	kVA	kW	E3SUPS40KHB + 3 of E3SXR6				E3SUPS40KHB + 4 of E3SXR6					
			20 of E3SBTH4	21 of E3SBTH4	22 of E3SBTH4	23 of E3SBTH4	24 of E3SBTH4	25 of E3SBTH4	26 of E3SBTH4	27 of E3SBTH4	28 of E3SBTH4	
5%	2	2	3000	3200	3400	3600	3800	4000	4100	4300	4500	
10%	4	4	1300	1400	1500	1500	1600	1700	1800	1900	2000	
15%	6	6	800	800	900	900	1000	1000	1100	1100	1200	
20%	8	8	500	600	600	600	700	700	800	800	800	
25%	10	10	400	400	500	500	500	500	600	600	600	
30%	12	12	300	300	400	400	400	400	400	500	500	
35%	14	14	300	300	300	300	300	300	400	400	400	
40%	16	16	255	275	290	300	300	300	300	300	300	
45%	18	18	225	235	250	265	280	295	300	300	300	
50%	20	20	195	210	220	230	245	255	270	280	295	
55%	22	22	175	185	195	205	220	230	240	250	260	
60%	24	24	155	165	175	185	195	205	215	225	235	
65%	26	26	140	150	160	170	180	185	195	205	215	
70%	28	28	130	140	145	155	165	170	180	190	195	
75%	30	30	120	125	135	140	150	155	165	175	180	
80%	32	32	110	115	125	130	140	145	150	160	165	
85%	34	34	100	110	115	120	130	135	140	150	155	
90%	36	36	97.5	100	105	115	120	125	130	140	145	
95%	38	38	91.5	97	100	105	110	120	125	130	135	
100%	40	40	86	91	96.5	100	105	110	115	120	125	

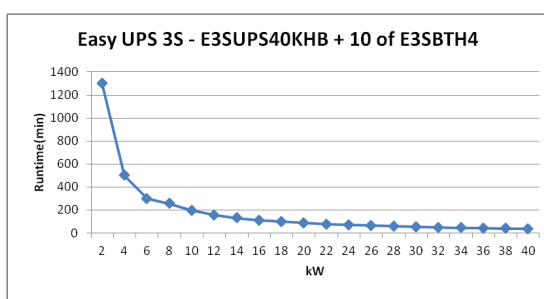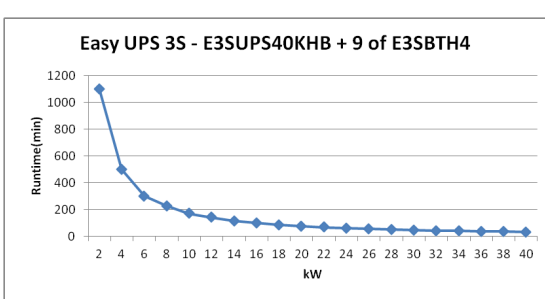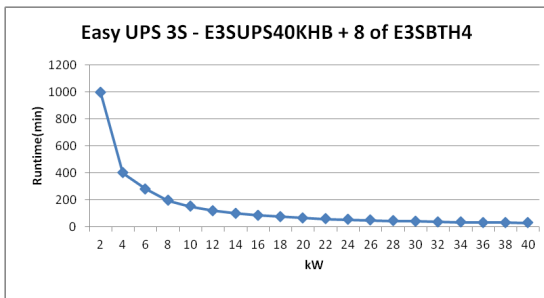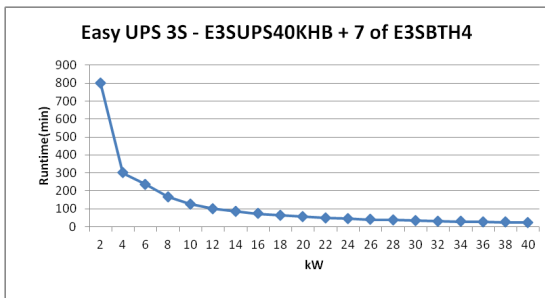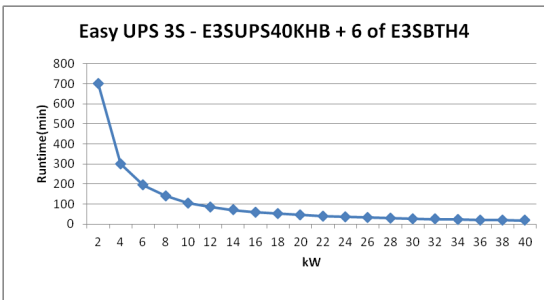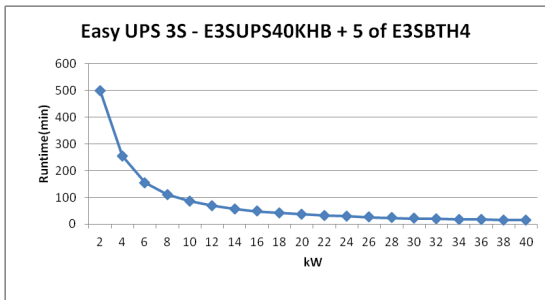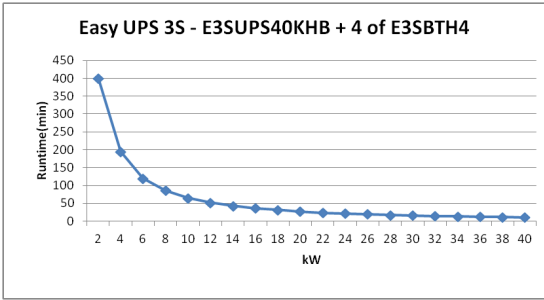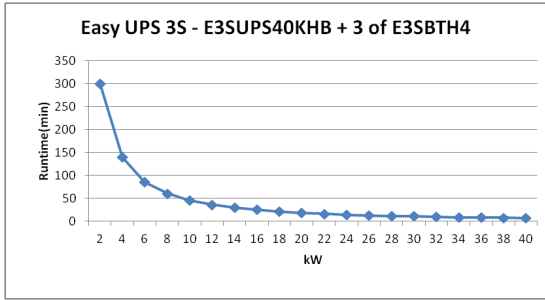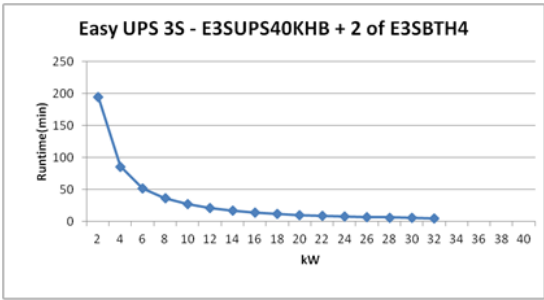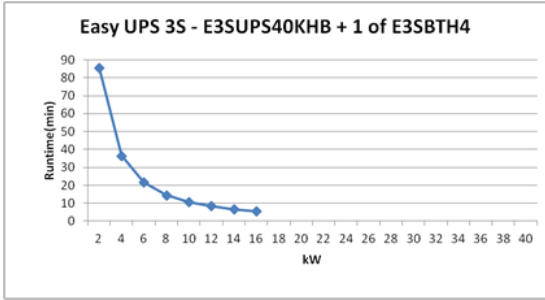

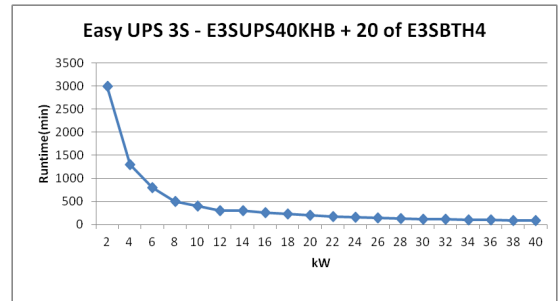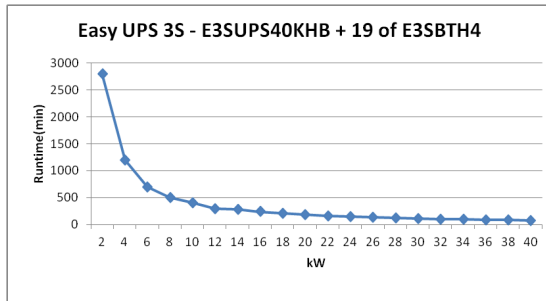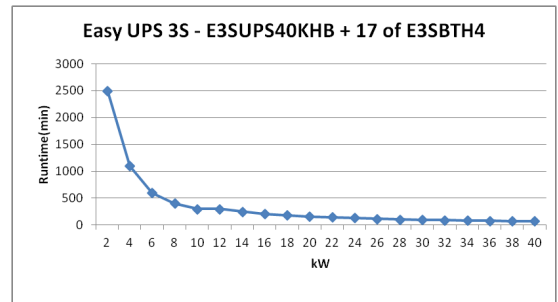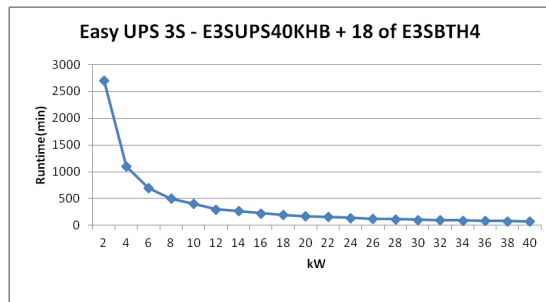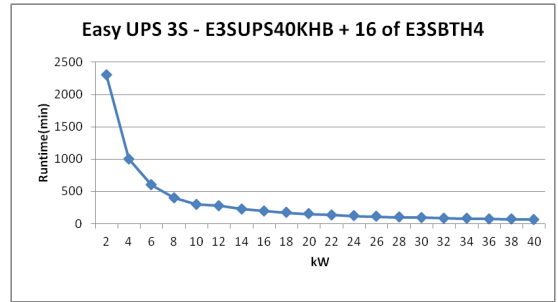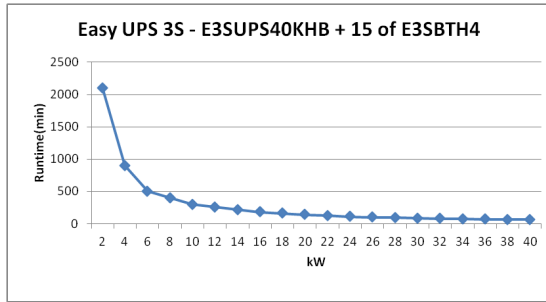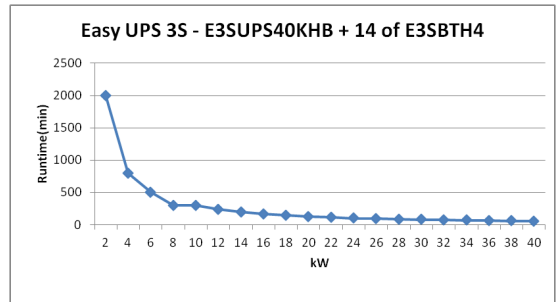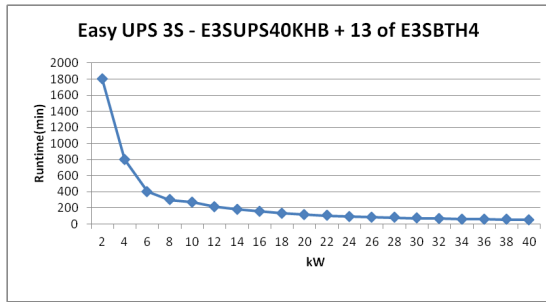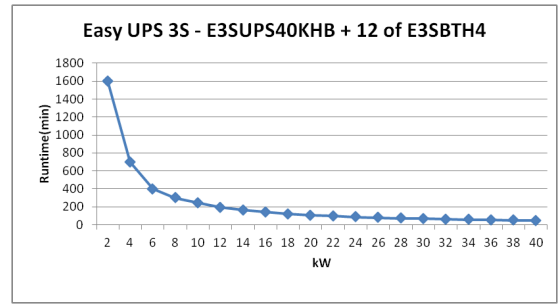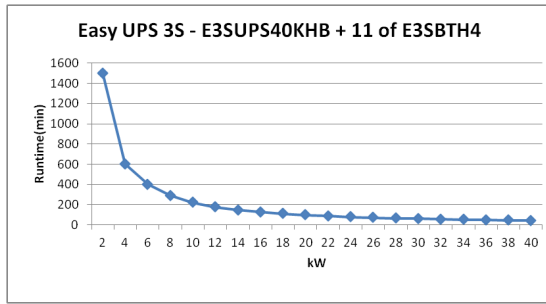

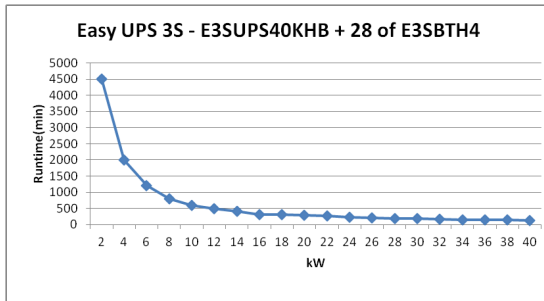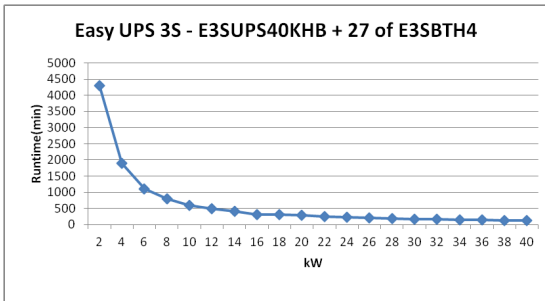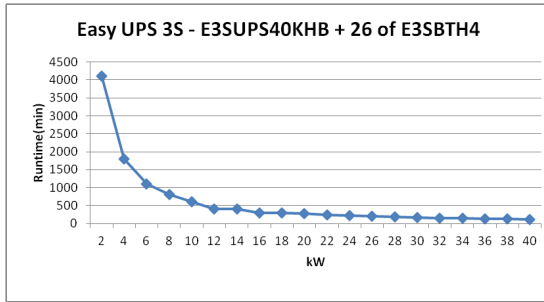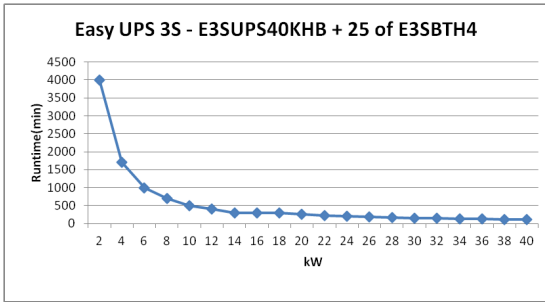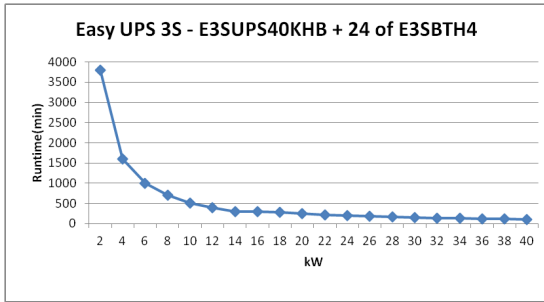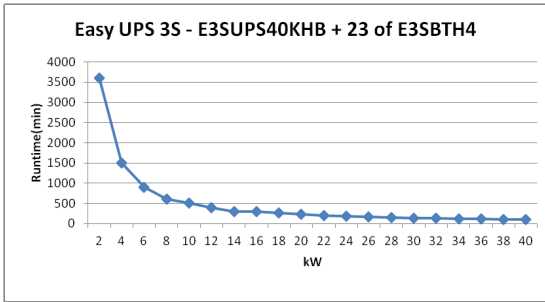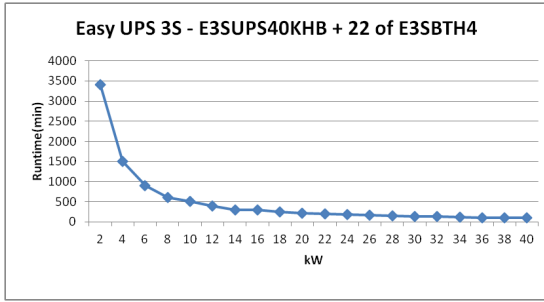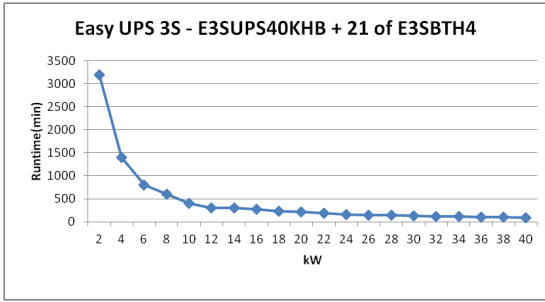

Easy UPS 3S - 40kVA – Runtime Table

UPS with battery of E3SBT4

Runtime estimation in minutes										
% of load	kVA	kW	E3SUPS40KHB1 or E3SUPS40KHB +3 of E3SBT4	E3SUPS40KHB2 or E3SUPS40KHB +4 of E3SBT4	E3SUPS40KHB + 1 of E3SXR6					
					5 of E3SBT4	6 of E3SBT4	7 of E3SBT4	8 of E3SBT4	9 of E3SBT4	10 of E3SBT4
5%	2	2	275	300	500	600	700	900	1000	1100
10%	4	4	120	170	220	280	300	300	400	500
15%	6	6	73	100	135	170	205	240	280	300
20%	8	8	51	73	96	120	145	170	195	220
25%	10	10	38.5	55	73	91.5	110	130	150	170
30%	12	12	30.5	44	58	73	88.5	100	120	135
35%	14	14	24.5	36	48	60.5	73	86.5	100	110
40%	16	16	20.5	30.5	40.5	51	62	73	84.5	96.5
45%	18	18	17.5	26	35	44	53.5	63.5	73.5	83.5
50%	20	20	15	22.5	30	38.5	46.5	55	64	73
55%	22	22	13	20	26.5	34	41.5	49	57	65
60%	24	24	11.5	17.5	24	30.5	37	44	51	58
65%	26	26	10.5	15.5	21.5	27.5	33.5	39.5	46	52.5
70%	28	28	9.4	14	19.5	24.5	30.5	36	42	48
75%	30	30	8.4	13	17.5	22.5	27.5	33	38.5	44
80%	32	32	7.6	11.5	16	20.5	25.5	30	35	40.5
85%	34	34	6.9	10.5	14.5	19	23.5	28	32.5	37.5
90%	36	36	6.3	9.9	13.5	17.5	21.5	26	30.5	34.5
95%	38	38	5.7	9.1	12.5	16.5	20	24	28	32.5
100%	40	40	5.2	8.4	11.5	15	19	22.5	26.5	30.5

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS40KHB + 2 of E3SXR6						E3SUPS40KHB + 3 of E3SXR6		
			11 of E3SBT4	12 of E3SBT4	13 of E3SBT4	14 of E3SBT4	15 of E3SBT4	16 of E3SBT4	17 of E3SBT4	18 of E3SBT4	19 of E3SBT4
5%	2	2	1300	1400	1600	1700	1900	2000	2200	2400	2500
10%	4	4	500	600	700	700	800	900	900	1000	1100
15%	6	6	300	300	400	400	500	500	600	600	600
20%	8	8	250	275	300	300	300	300	400	400	400
25%	10	10	190	210	235	255	275	300	300	300	300
30%	12	12	150	170	185	205	220	240	260	280	295
35%	14	14	125	140	155	170	185	200	215	230	245
40%	16	16	105	120	130	145	155	170	180	195	210
45%	18	18	94	100	115	125	135	145	160	170	180
50%	20	20	82	91.5	100	110	120	130	140	150	160
55%	22	22	73	81.5	90	98.5	105	115	125	130	140
60%	24	24	65.5	73	80.5	88.5	96.5	100	110	120	125
65%	26	26	59.5	66	73	80	87.5	94.5	100	105	115
70%	28	28	54	60.5	66.5	73	79.5	86.5	93	100	105
75%	30	30	49.5	55.5	61	67	73	79.5	85.5	91.5	98
80%	32	32	45.5	51	56.5	62	67.5	73	78.5	84.5	90.5
85%	34	34	42	47	52	57.5	62.5	67.5	73	78.5	84
90%	36	36	39	44	48.5	53.5	58	63	68	73	78
95%	38	38	36.5	41	45.5	50	54.5	59	63.5	68.5	73
100%	40	40	34.5	38.5	42.5	46.5	51	55.5	59.5	64	68.5

Runtime estimation in minutes											
% of load	kVA	kW	E3SUPS40KHB + 3 of E3SXR6			E3SUPS40KHB + 4 of E3SXR6					
			20 of E3SBT4	21 of E3SBT4	22 of E3SBT4	23 of E3SBT4	24 of E3SBT4	25 of E3SBT4	26 of E3SBT4	27 of E3SBT4	28 of E3SBT4
5%	2	2	2700	2800	3000	3200	3300	3500	3700	3900	4000
10%	4	4	1100	1200	1300	1400	1400	1500	1600	1700	1700
15%	6	6	700	700	800	800	900	900	1000	1000	1000
20%	8	8	500	500	500	600	600	600	700	700	700
25%	10	10	300	400	400	400	400	500	500	500	500
30%	12	12	300	300	300	300	300	400	400	400	400
35%	14	14	260	280	295	300	300	300	300	300	300
40%	16	16	225	235	250	265	280	290	300	300	300
45%	18	18	195	205	215	230	240	255	265	280	290
50%	20	20	170	180	190	200	210	220	235	245	255
55%	22	22	150	160	170	180	190	195	205	215	225
60%	24	24	135	145	150	160	170	180	185	195	205
65%	26	26	120	130	135	145	155	160	170	175	185
70%	28	28	110	120	125	135	140	145	155	160	170
75%	30	30	100	110	115	125	130	135	140	150	155
80%	32	32	96	100	105	110	120	125	130	135	145
85%	34	34	89.5	95	100	105	110	115	120	125	135
90%	36	36	83	88.5	93.5	99	100	105	115	120	125
95%	38	38	78	82.5	87.5	92.5	97.5	100	105	110	115
100%	40	40	73	77.5	82.5	87	91.5	96.5	100	105	110

