

CARACTÉRISTIQUES TECHNIQUES / Technical data
VLVAF3P03516AA

TENSION ASSIGNEE / rated voltage (Un):	400	V
PUISSANCE ASSIGNEE / rated power (Qn):	300	Kvar
COURANT ASSIGNÉ / rated current (In):	433	A
COURANT MAXIMUM PERMANENT / maximum continuous current (Imp):	515	A
FRÉQUENCE ASSIGNÉE / rated frequency (Fn):	50	Hz
ISOLEMENT / insulation (Um):	690	V
PERTES CALCULÉES / calculated losses:	1800	W
ACCORD / tuning:	190	Hz
COURANT ASSIGNE DE COURT-CIRCUIT CONDITIONNEL / rated conditional short-circuit current (Icc):	50	kA
COURANT ASSIGNE DE COURTE DUREE ADMISSIBLE / rated short-time withstand current (Icw):	-	kA/1s
UTILISATION INTÉRIEURE / indoor type:	IP31	
NORME / standard:	IEC 61439-1 : 2011 IEC 61439-2 : 2011 IEC 61921 : 2017	
TEMPERATURE / temperature:	-5° / +45°C	°C
MOYENNE SUR 24 HEURE / average temperature over 24 hours :	35°C	°C
MOYENNE ANNUELLE / average annual temperature :	25°C	°C
SCHEMA ELECTRIQUE DE PUISSANCE / Power diagram :	PF3PA4S(D21)WCBSPF	
SCHEMA ELECTRIQUE DE CONTROLE / Control diagram :	CF3PA4S(D21)WCB	
PLANS D'ARCHITECTURE, D'IMPLANTATION & D'INSTALLATION / General Arrangement, Layout & Installation drawings :	EF3PA3M4SBWCBPF	
BORNIER CLIENT / Customer Terminal Blocks :	S1B9989700	



VarSet capacitor bank Auto 300kvar DR3,8 with incomer CB xxB 400V 50Hz

Number:

VLVAF3P03516AA

Revision:

00

Sheet:

1/2

Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires.

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

NOMENCLATURE / Bill of material

Item	Description	Part N°
QS01	Gamme / range – Ref Disjoncteur / Ref Breaker	NSX630N - LV432893
	Réglage / Setting	600/0,95/7
	Bobine MX - Auxiliary MX	LV429387

MODULES						
	n=1	n=2	n=3	n=4	n=5	n=6
Power (kVar)	50 + 50	100	100	-	-	-
QS _n	Fuses 250A	Fuses 250A	Fuses 250A			
KM _n	LC1D95P7 x 2	LC1D115P7	LC1D115P7			
C _n	BLRCH680A000B48 x 2	BLRCH680A000B48 x 2	BLRCH680A000B48 x 2			
DR _n	LVR7500A40T x 2	LVR07X00A40T	LVR07X00A40T			
	n=7	n=8	n=9	n=10	n=11	n=12
Power (kVar)	-	-	-	-	-	-
QS _n						
KM _n						
C _n						
DR _n						

Item	Description	Part N°
QF1	Fuses or CB	DF2CA04
QF2	Unipolar and neutral breaker	A9F74603
TC1	Transformer	ABL6TS63U
ST1	Thermostat (ventilation)	
ST2	Thermostat (overheating)	NSYCCOTH0
EV1	Fan	PHA25988
EV2	Fan	
A1	PFC controller	VPL06N

(La liste et les références des composants figurant ci-après sont données à titre indicatif compte tenu de leur caractère évolutif du fait des éventuelles modifications de design ou évolutions des normes de référence / As product design and standards of reference change from time to time, the following list of part and corresponding reference are for information only)



VarSet capacitor bank Auto 300kvar DR3,8 with incomer CB xxB 400V 50Hz

Number:

VL VAF3P03516AA

Revision:

00

Sheet:

2/2

Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

A

B

C


D


A


B

C


D

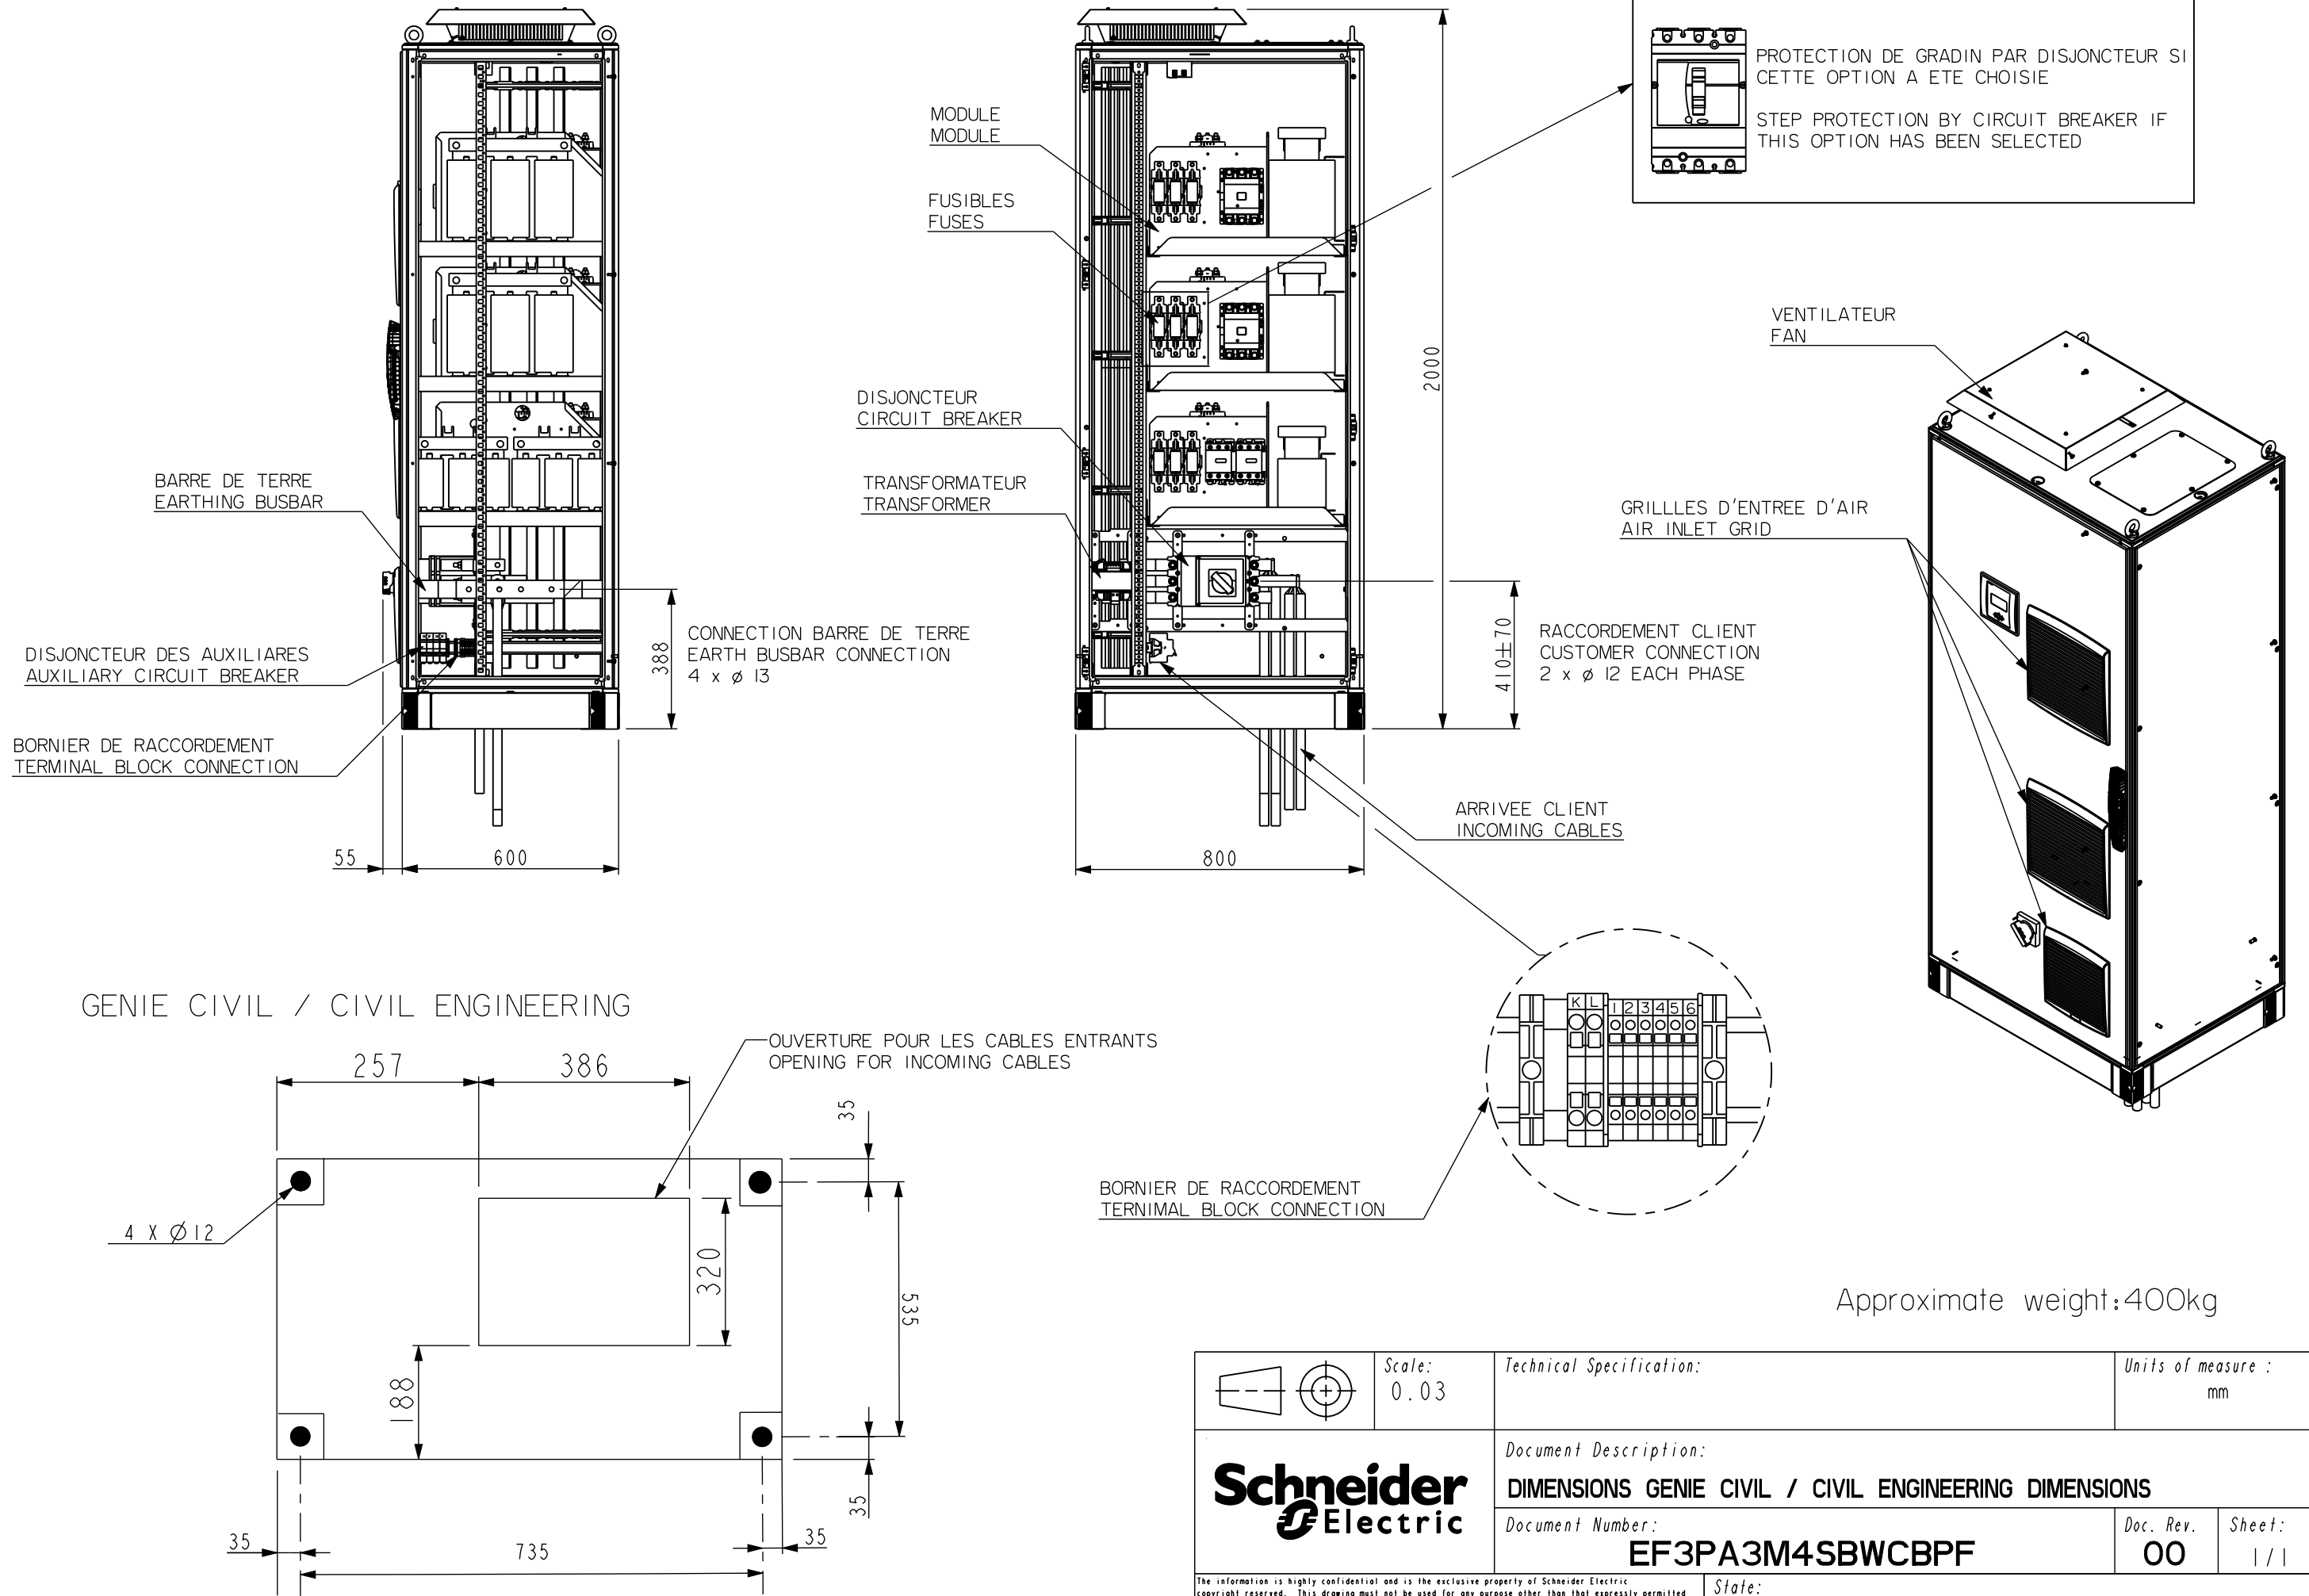

	Scale: 0.03	Technical Specification:	Units of measure : mm
Schneider Electric	Document Description: DIMENSIONS GENIE CIVIL / CIVIL ENGINEERING DIMENSIONS		
	Document Number: EF3PA3M4SBWCBPF		Doc. Rev. Sheet: 00 1 / 1
The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This drawing must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing. This drawing must be returned to the owners when the purpose has ceased.		State:	

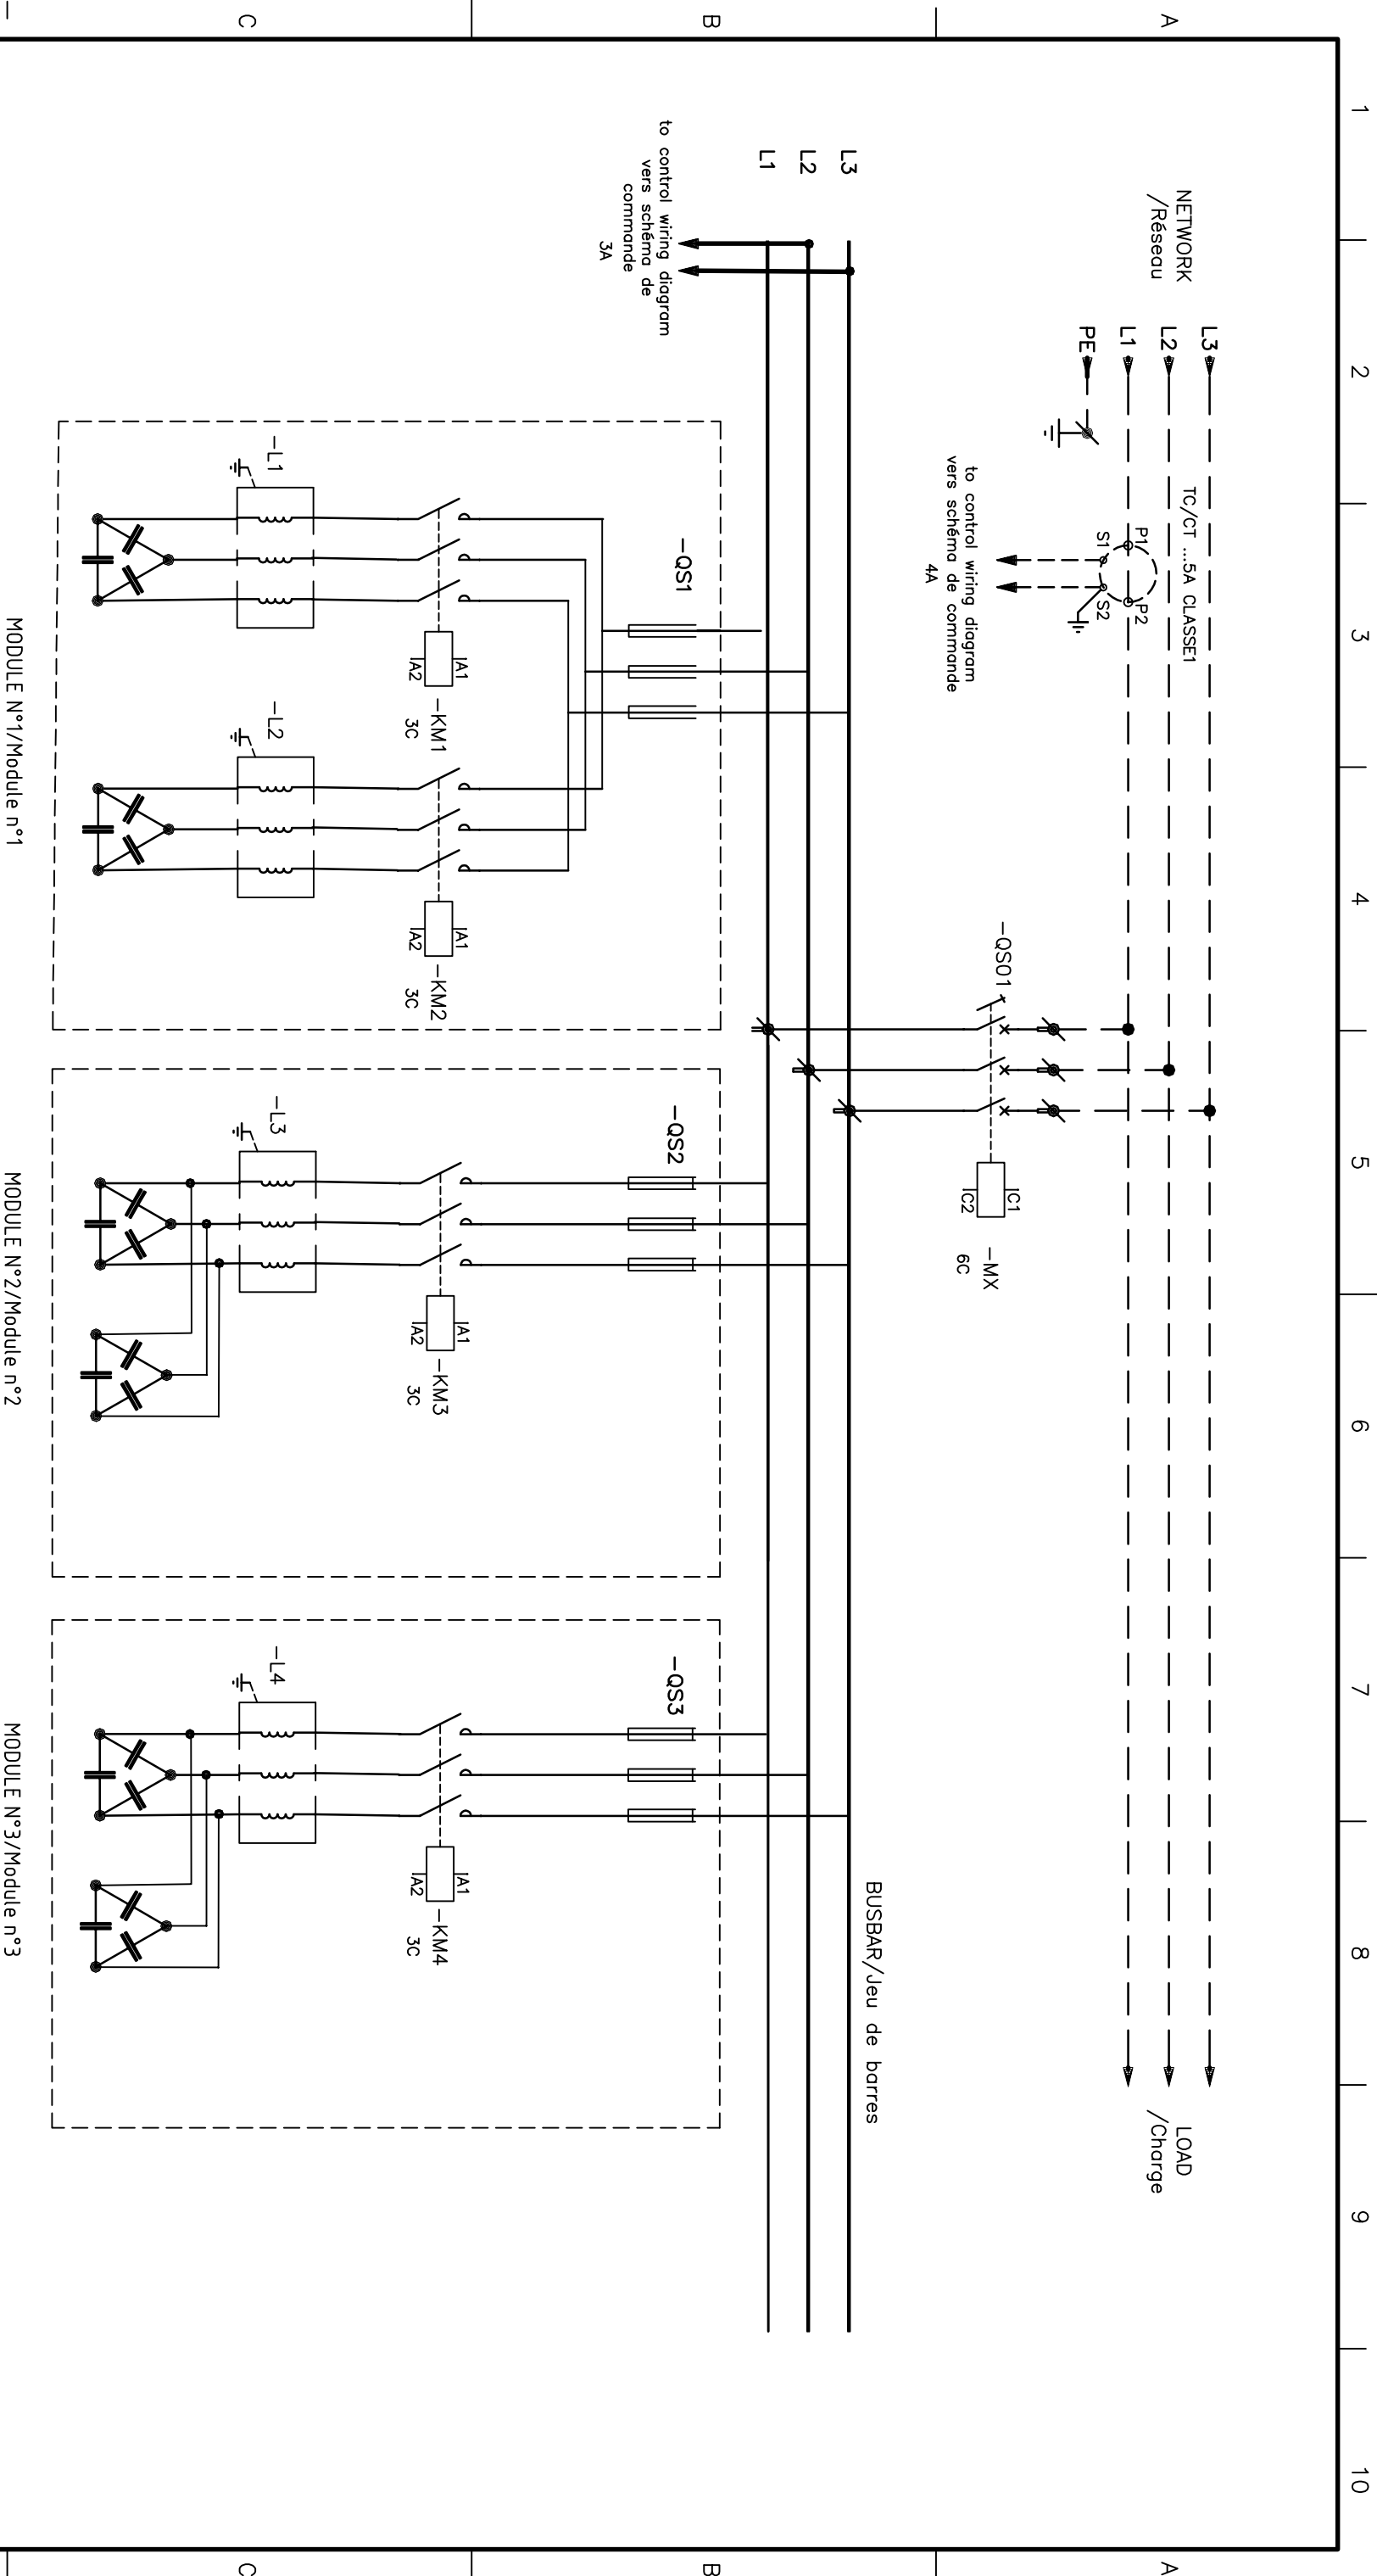

D	Connection not supply/Connexion non fournie



F3P auto P wiring diag W CB 4 steps

Schneider
Electric


Number: **PF3PA4S(D21)WCBSPF**

Revision: 00 Sheet: 1 / 1

Sheet:
1 / 1

All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent

State:

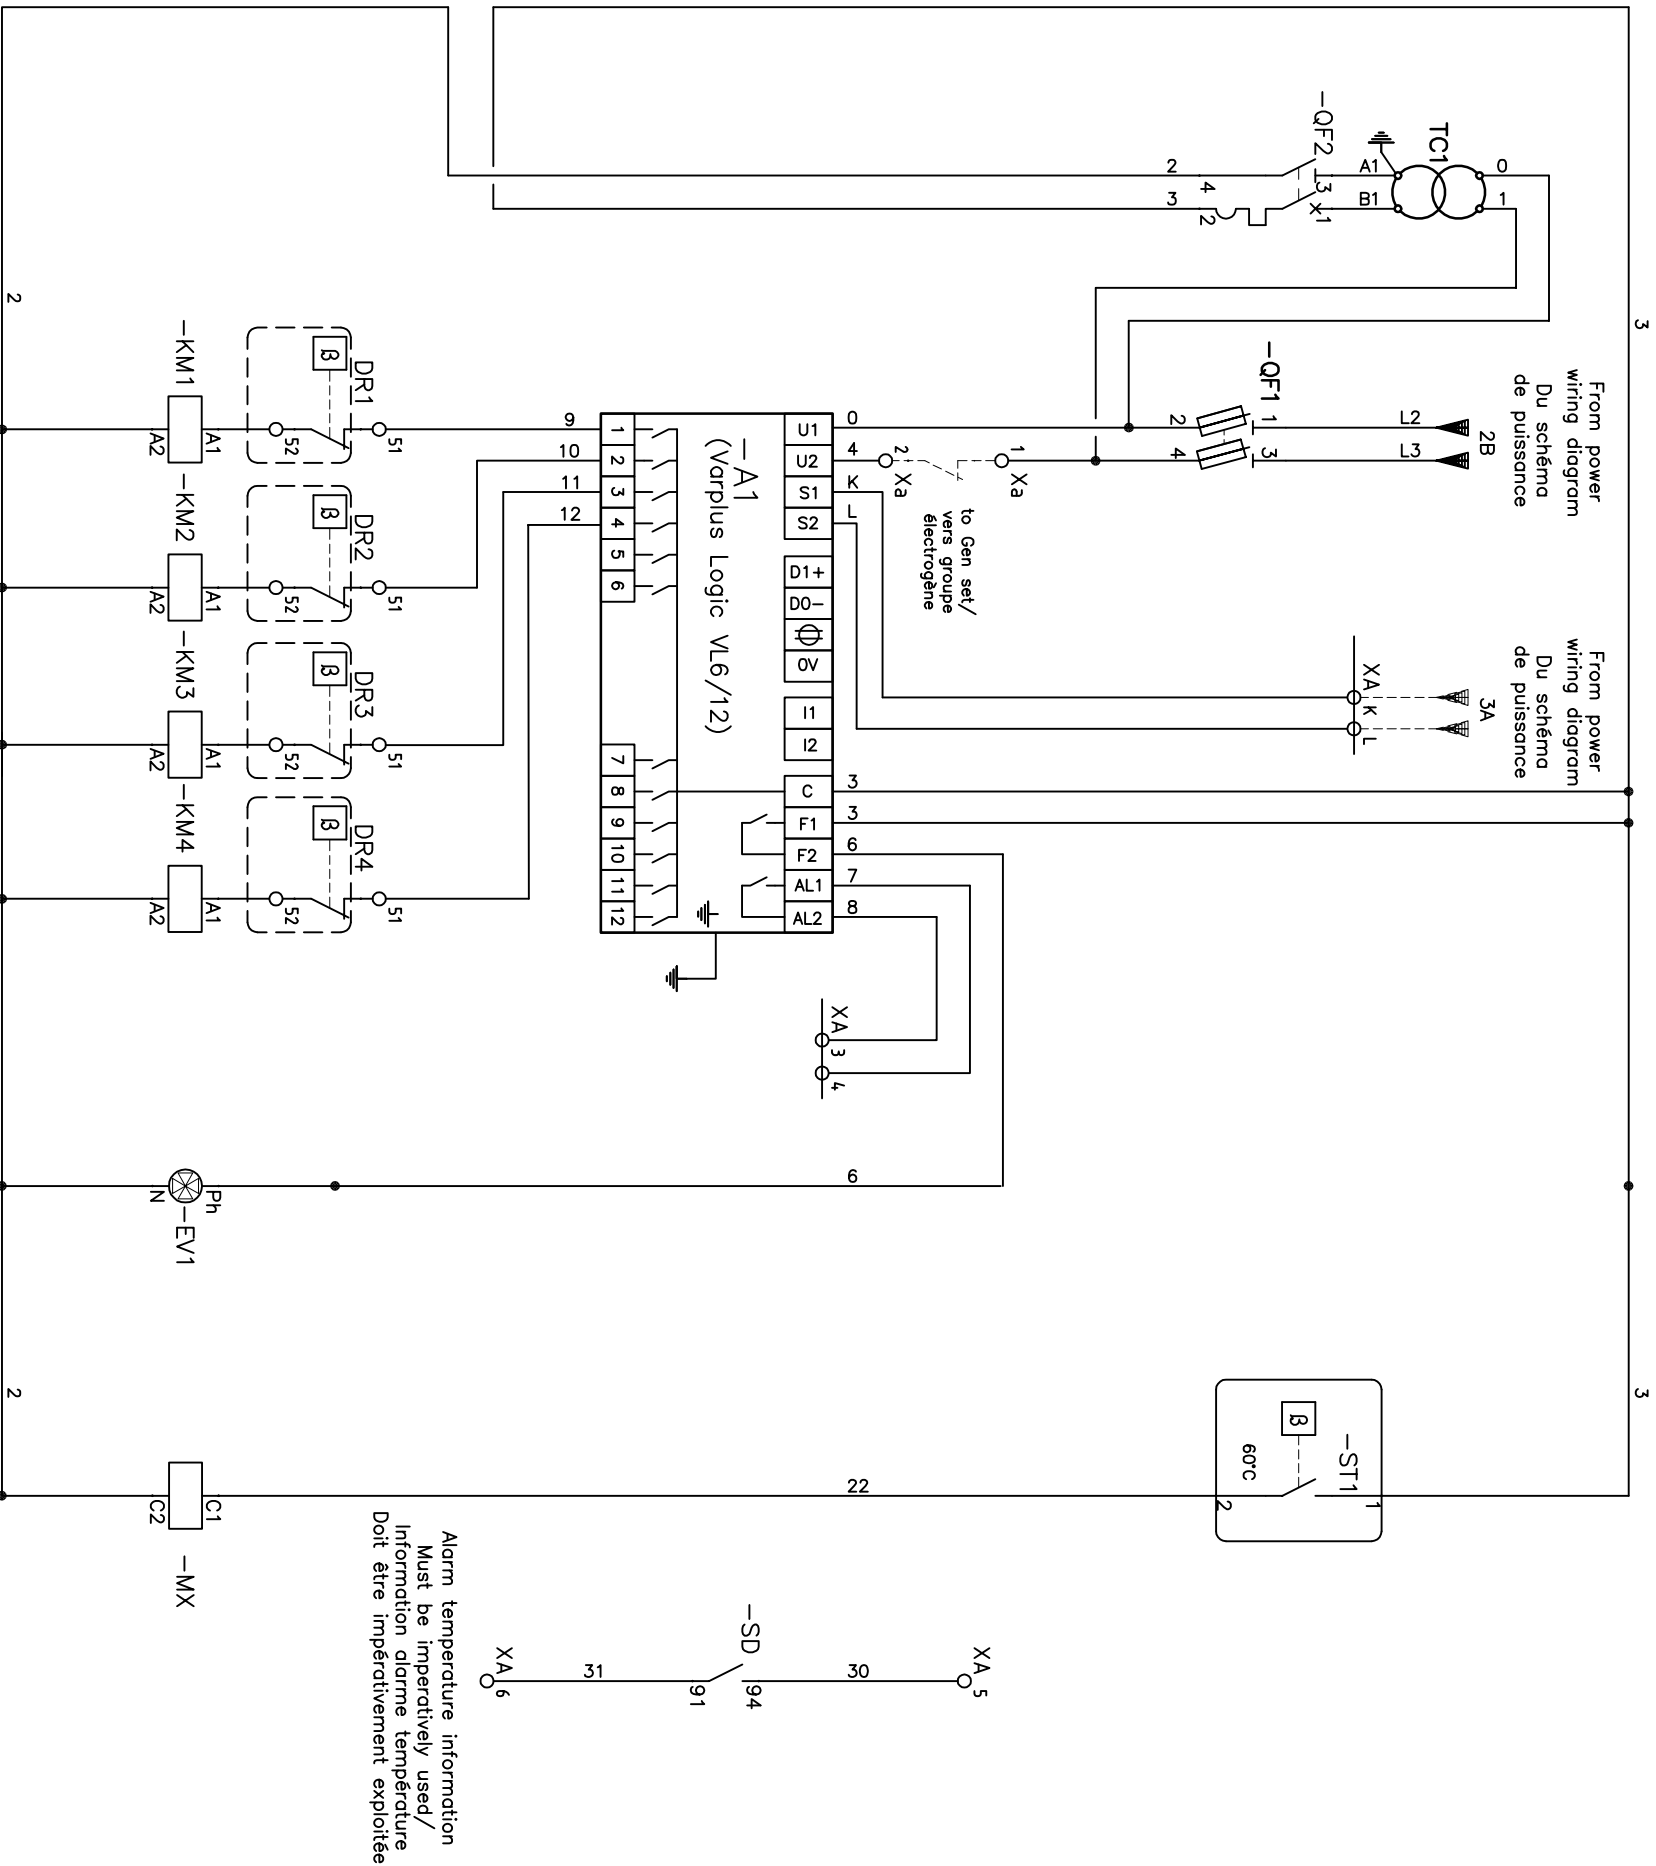

----- Connection not supply/Connexion non fournie

	Scale:	Tolerancing Standard :	Units of measure :
--	--------	------------------------	--------------------

Schneider Electric		F3P CONTROL WIRING DIAGRAM - 4 STEPS - WITH CB	
Number: CF3PA4S(D21)WCB		Revision: 00	
NETWORK : 400V-415V/50Hz & 400V/60Hz		Sheet: 1 / 1	


All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent		State:	
---	--	--------	--

CUSTOMER TERMINAL BLOCK

Bornier client

Клеммный блок для внешних присоединений

VLVAW1N/VLVAW2N/VLVAW3N
/VLVAF5N/VLVAF6P
VLVAF2P/VLVAF3P/VLVAF5P

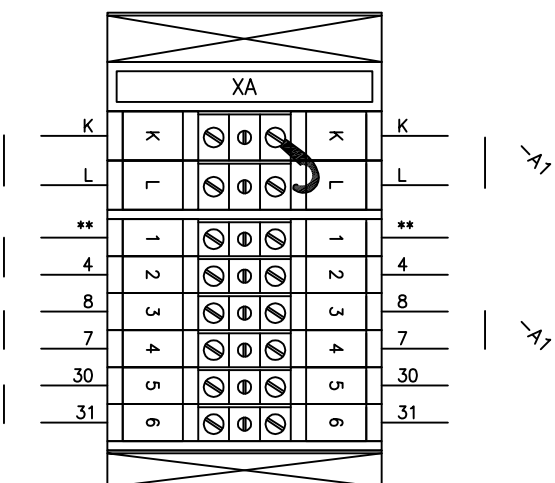

**
= 1 for VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P/
= 1 для контроллеров VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P
= 1 for VL12 VLVAF5N-VLVAF6P /
= 1 для контроллеров VL12 VLVAF5N-VLVAF6P

PFC current measure/Mesure courant régulateur/
Измерение тока
Gen set / Groupe électrogène
Генераторная установка
PFC alarm / Alarme température
Сигнализация по температурному режиму
Alarm temperature information/Information alarme température
Сигнализация по температурному режиму

	Scale:	Tolerancing Standard :	Units of measure :
---	--------	------------------------	--------------------

CUSTOMER TERMINAL BLOCKS	
BORNIER CLIENT	
Number:	Revision:
S1B9989700	06
Sheet:	1 / 1