

CATALOG NUMBER **--SERIES 2011

AMPACITY	SCCR (240V/480V)		
	65k/35k	100k/65k	125k/100k
400A	SBSAD800LH4	SBSAD800LC4	SBSAD800LI4
600A	SBSAD800MGA6	SBSAD800MJA6	SBSAD800PLA6
800A	SBSAD800MGA8	SBSAD800MJA8	SBSAD800PLA8

** STAND-ALONE DISTRIBUTION SECTION NOT CONNECTED TO AN SB SECTION. SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN PROVIDED WITH A BACK-FEED MAIN CIRCUIT BREAKER.






SPECIFICATIONS:
CONSTRUCTION: PER UL STANDARD 891

ENCLOSURE: TOTALLY ENCLOSED, FRONT ACCESSIBLE,
CODE GAUGE STEEL. ANSI #49 BAKED ENAMEL FINISH.

DISTRIBUTION PANEL: I-LINE PANEL ACCEPTS QB, QD, QG, QJ, FY, FA,
FH, HD, HG, HJ, HL, JD, JG, JJ, JL, LA, LH, LC, MG, MJ, PG, PJ,
AND PL CIRCUIT BREAKERS.

BUS MATERIAL: COPPER

THE SHORT-CIRCUIT CURRENT RATING OF THIS SWITCHBOARD SECTION IS EQUAL TO THE LOWEST SHORT-CIRCUIT RATING OF ANY SECTION ELECTRICALLY CONNECTED IN SERIES, OR THE LOWEST MARKED RATING AT THE SUPPLY VOLTAGE OF ANY CIRCUIT BREAKER OR SERIES CONNECTED RATING INSTALLED IN THIS SECTION. THE SECTION'S MAXIMUM SHORT-CIRCUIT CURRENT RATING IS 125,000 RMS SYMMETRICAL AMPERES AT 240V AC OR 100,000 RMS SYM. AMPERES AT 480V AC.

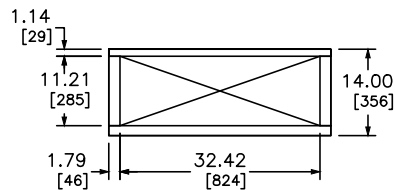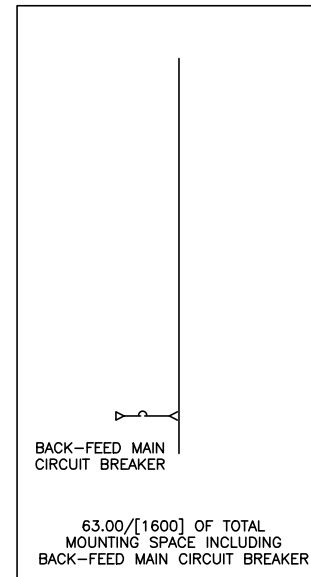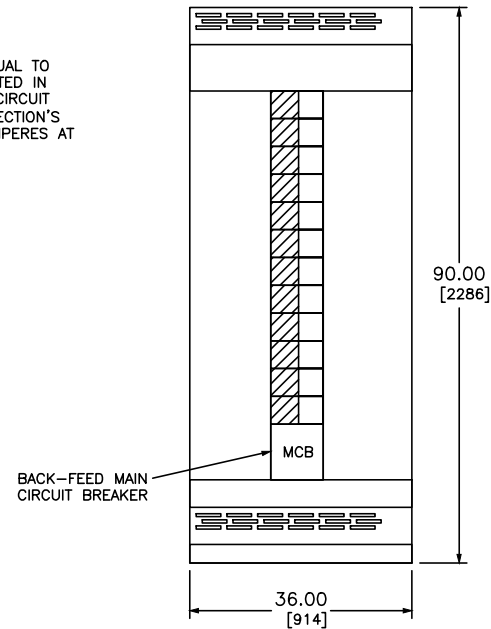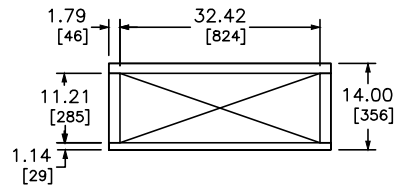

INDICATES RECOMMENDED
CONDUIT AREA

I-LINE 400-800 AMP SECTION
WITH SINGLE BACK-FED MAIN CIRCUIT BREAKER
SPEED D SWITCHBOARD
ELEVATION



by Schneider Electric

DWG# SPEED-D12