


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

T36CN139BDS

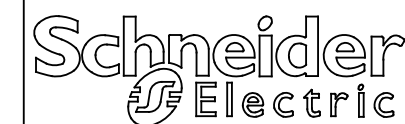

Schneider Electric United States
 North American Division
 Boston One Campus
 800 Federal Street
 Andover, MA 01810, USA
 Phone: +1 8773425173
 Email: CCC@us.schneider-electric.com

Technical Information:

Max. Continuous Current Rating: 600V / 27A
 Certifications: UL Listed, CSA, CE
 RoHS: Yes
 Termination Method: Power Line: Screw Clamp, Power Load: Lug, Control Circuit: Screw Clamp
 Weight (lbs): 6.28
 Power Line Size (AWG): #6 - #14
 Power Load Size (AWG): #4 - #14
 Control Wire Size (AWG): #10 - #18
 Thermal Overload Type: Motor Logic Solid State 3 - 9A
 Thermal Overload Trip Class: Class 10/20 Selectable
 Mounting: Panel

Specification:

Description: TeSys N Sz 1 open starter, 3 pole, 24VDC with special SSOLR (Size 00C), Separate Control
 Type: FVNR
 Voltages Code: BD at 24VDC
 Control Type: Separate Control
 Coil Consumption: Inrush 5.4 W
 Sealed 5.4 W

Single Phase			Three Phase		
115V	230V	200V	230V	460V	575V
2 HP	3 HP	7.5 HP	7.5 HP	10 HP	10 HP