Product Environmental Profile

QOvs MCB

QO MCB Series








☐ General information

| Reference product | QOvs MCB - QO132VSC6 | | | | | |
|----------------------------|--|--|--|--|--|--|
| Description of the product | Provide overload protection and short circuit protection in low voltage power system | | | | | |
| Description of the range | This range consists of QOvs MCB of 6A to 32A, 1P to 3P, C curve. The representative product used for the analysis is QOvs MCB 1P 32A C type (commercial reference: QO132VSC6). The mass of the product range is from 104g and 312g including packaging. | | | | | |
| | The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology. | | | | | |
| Functional unit | Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 240V and rated current 32A. This protection is ensured in accordance with following standard: IEC/EN 60898-1, and the following parameters: - Number of poles: 1 P - Rated breaking capacity: 6000 A - Tripping curve: C | | | | | |

Constituent materials

Reference product mass

106 g including the product, its packaging and additional elements and accessories

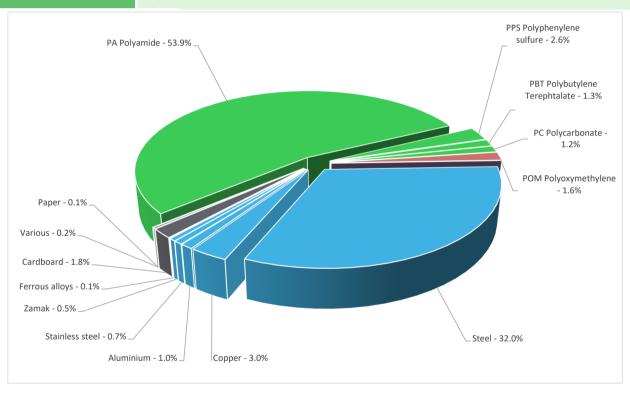

 Plastics
 60.60%

 Metals
 37.30%

 Others
 2.10%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/



(19) Additional environmental information

End Of Life

Recyclability potential:

37%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0%



Tenvironmental impacts

| Reference service life time | 20 years | | | | | | |
|------------------------------------|--|--|---|--|--|--|--|
| Product category | Circuit-breakers | | | | | | |
| Installation elements | The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal). | | | | | | |
| Use scenario | Load rate: 50% of In Use time rate: 30% of RLT | | | | | | |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production | | | | | | |
| Geographical representativeness | UK | | | | | | |
| Energy model used | [A1 - A3] | [A5] | [B6] | [C1 - C4] | | | |
| | Electricity Mix; Production mix; Low voltage; TH | Electricity Mix; Production mix; Low voltage; UK | Electricity Mix; Production mix; Low voltage; UK | Electricity Mix; Production mix; Low voltage; UK | | | |

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

| Mandatory Indicators | | | | QOV | vs MCB - QO132V | SC6 | | |
|--|-----------------|-----------|---------------|--------------|-----------------|-----------|-------------|-----------|
| lancas in diagram | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | Benefits |
| Impact indicators | Unit | Total | [A1 - A3] | [A4] | [A5] | [B1 - B7] | [C1 - C4] | [D] |
| Contribution to climate change | kg CO2 eq | 1.27E+01 | 8.55E-01 | 3.06E-02 | 3.64E-03 | 1.15E+01 | 2.93E-01 | -7.64E-01 |
| Contribution to climate change-fossil | kg CO2 eq | 1.26E+01 | 8.53E-01 | 3.06E-02 | 3.48E-03 | 1.15E+01 | 2.92E-01 | -7.59E-01 |
| Contribution to climate change-biogenic | kg CO2 eq | 1.61E-02 | 1.82E-03 | 0* | 1.62E-04 | 1.35E-02 | 6.35E-04 | -5.11E-03 |
| Contribution to climate change-land use and land use change | kg CO2 eq | 1.06E-08 | 0* | 0* | 0* | 0* | 1.06E-08 | 0.00E+00 |
| Contribution to ozone depletion | kg CFC-11 eq | 1.24E-07 | 6.65E-08 | 2.70E-08 | 2.41E-10 | 2.95E-08 | 1.23E-09 | -1.13E-07 |
| Contribution to acidification | mol H+ eq | 5.93E-02 | 5.10E-03 | 1.33E-04 | 1.44E-05 | 5.35E-02 | 4.76E-04 | -5.02E-03 |
| Contribution to eutrophication, freshwater | kg (PO4)3- eq | 7.70E-05 | 1.49E-05 | 0* | 2.63E-08 | 3.95E-05 | 2.26E-05 | -1.40E-06 |
| Contribution to eutrophication marine | kg N eq | 7.08E-03 | 6.98E-04 | 6.10E-05 | 3.82E-06 | 6.23E-03 | 8.86E-05 | -4.39E-04 |
| Contribution to eutrophication, terrestrial | mol N eq | 1.71E-01 | 7.63E-03 | 6.61E-04 | 2.89E-05 | 1.62E-01 | 1.04E-03 | -5.08E-03 |
| Contribution to photochemical ozone formation - human health | kg COVNM eq | 1.97E-02 | 2.35E-03 | 2.17E-04 | 7.71E-06 | 1.68E-02 | 3.24E-04 | -1.79E-03 |
| Contribution to resource use, minerals and metals | kg Sb eq | 5.22E-05 | 5.02E-05 | 0* | 0* | 1.30E-06 | 6.39E-07 | -2.07E-04 |
| Contribution to resource use, fossils | MJ | 3.56E+02 | 1.45E+01 | 3.71E-01 | 3.79E-02 | 3.33E+02 | 7.34E+00 | -1.63E+01 |
| Contribution to water use | m3 eq | -6.85E-02 | -3.40E-01 | 0* | 0* | 0* | 0* | -3.13E-01 |

Additional indicators for the French regulation are available as well

| Inventory flows Indicators | | | | QOv | s MCB - QO132V | SC6 | | |
|--|---------|-----------|------------------------|-------------------|----------------|------------------|--------------------------|-----------------|
| Inventory flows | Unit | Total | Manufact. [A1 - A3] | Distribution [A4] | Installation | Use [B1 - B7] | End of Life [C1 - C4] | Benefits [D] |
| Contribution to use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 1.02E+02 | 2.41E-01 | 0* | 0* | 1.02E+02 | 1.63E-02 | -1.95E-01 |
| Contribution to use of renewable primary energy resources used as raw material | MJ | 3.95E-02 | 3.95E-02 | 0* | 0* | 0* | 0* | -2.99E-03 |
| Contribution to total use of renewable primary energy resources | MJ | 1.02E+02 | 2.80E-01 | 0* | 0* | 1.02E+02 | 1.63E-02 | -1.98E-01 |
| Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 3.54E+02 | 1.30E+01 | 3.71E-01 | 3.79E-02 | 3.33E+02 | 7.34E+00 | -1.63E+01 |
| Contribution to use of non renewable primary energy resources used as raw material | MJ | 1.54E+00 | 1.54E+00 | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to total use of non-renewable primary energy resources | MJ | 3.56E+02 | 1.45E+01 | 3.71E-01 | 3.79E-02 | 3.33E+02 | 7.34E+00 | -1.63E+01 |
| Contribution to use of secondary material | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to net use of freshwater | m³ | -1.59E-03 | -7.92E-03 | 0* | 0* | 0* | 0* | -7.28E-03 |
| Contribution to hazardous waste disposed | kg | 4.28E+00 | 4.04E+00 | 0* | 0* | 1.38E-01 | 1.03E-01 | -1.64E+01 |
| Contribution to non hazardous waste disposed | kg | 1.10E+00 | 2.68E-01 | 0* | 1.18E-02 | 7.62E-01 | 6.27E-02 | -7.04E-01 |
| Contribution to radioactive waste disposed | kg | 2.27E-04 | 9.04E-05 | 6.08E-06 | 1.59E-06 | 1.27E-04 | 2.71E-06 | -3.76E-04 |
| Contribution to components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to materials for recycling | kg | 4.01E-02 | 0* | 0* | 2.00E-03 | 0* | 3.81E-02 | 0.00E+00 |
| Contribution to materials for energy recovery | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to exported energy | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to biogenic carbon content of the product | kg de C | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |
| Contribution to biogenic carbon content of the associated packaging * represents less than 0.01% of the total life cycle of the | kg de C | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | 0.00E+00 |

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| Registration number: | ENVPEP2104004_V1 | Drafting rules | PEP-PCR-ed4-2021 09 06 | | | |
|---|------------------|-------------------------------------|-------------------------|--|--|--|
| Verifier accreditation N° | | Supplemented by | PSR-0005-ed2-2016 03 29 | | | |
| Date of issue | 2023/08/17 | Information and reference documents | www.pep-ecopassport.org | | | |
| | | Validity period | 5 years | | | |
| Independent verification of the declaration and data, in compliance with ISO 14021 : 2016 | | | | | | |

Independent verification of the declaration and data, in compliance with ISO 14021 : 201

Internal X External

The PCR review was conducted by a panel of experts chaired by Julie ORGELET (Ddemain)

PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021: 2016 « Environmental labels and declarations. Type II environmental declarations »

Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact 35, rue Joseph Monier CS 30323

F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

ENVPEP2104004_V1 ©2023 - Schneider Electric - All rights reserved

2023/08/17