

APPLICATION GUIDE Switch Module, Push-in








CAT. NO.

3031P_1_2M_F	3031M2P_3M_F
3031P_1_2NM	3031E1P_2NM
3031P_2_3M_F	3031E1P_2M_F
3031M1P_2NM	3031E2P_3M_F
3031M1P_2M_F	

Concept

Thank you for choosing **Schneider Electric** Concept Switches. To ensure proper application of our product, please read through the following information before installation and use.

This application guide applies to the following products.

Cat. No.	Description
 3031P_1_2M_F	16AX 1W Switch 1M Sized Module Push in
 3031P_1_2NM	16AX 1W Sw 1M Sized Module Neon Push in
 3031P_2_3M_F	16AX 2W Switch 1M Sized Module Push in
 3031M1P_2NM	16AX 1W Sw 1.5M Size Module Neon Push in
 3031M1P_2M_F	16AX 1W Sw 1.5M Sized Module Push in
 3031M2P_3M_F	16AX 2W Switch 1.5M Sized Module Push in
 3031E1P_2NM	16AX 1W Sw 3M Sized Module Neon Push in
3031E1P_2M_F	16AX 1W Switch 3M Sized Module Push in
3031E2P_3M_F	16AX 2W Switch 3M Sized Module Push in

SPECIFICATIONS


Voltage	: 250V~
Max Current	: 16AX
Compliance	: IEC 60669-1 TIS 824-2551

IMPORTANT NOTE


1. The products must be installed by qualified electricians.
2. Please check your local wiring regulations before installation.
3. Safekeeping the surround to prevent damage during product installation.
4. Turn off the power supply when you clean the product. Use a soft dry cloth for cleaning the product surface.

WIRING DIAGRAMS

1/ 1W

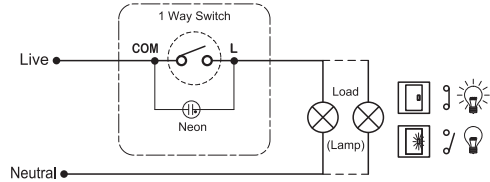

2/ 2W

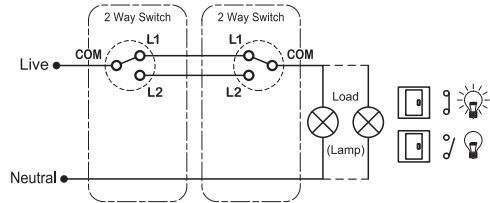

MOUNTING INSTRUCTION

The process of connecting cables :

1. Cut the sheath of cable to about 12mm length
2. Press the release button with fingers before pushing in the cables.
3. Push in the cables.
4. Release your fingers and finish the operation.




The process of releasing cables :

1. Press the release button by fingers before pulling out the cables.
2. Pull out the cable; for 4.0 mm² cables, please spin the cables before pulling out the cables.




Please refer to the following diagram for proper installation.



Remarks:

For surround mounting, align the clip locks on the faceplate and press both side of the surround. Complete engagement of the clip locks is indicated by two clear clicks.



Insert a screwdriver into the clip lock, and twist the screwdriver to remove the surround.