

Conventional IS Manual Call Point MCP3A- R000SG-K013-01IS

Instruction Sheet
R10202GB0



Schneider Electric Fire & Security Oy

Sokerilinnantie 11 C
FI-02600 Espoo, Finland
Tel: +358 10 446 511
Website: www.se.com
Document number: R10202GB0
Published: 06.03.2020

© 2020 – Schneider Electric. All Rights Reserved. This information is only to be used as guidance. Subject to changes and errors.

Contents

1	Intrinsically Conventional Manual Call Point MCP3A-R000SG-K013-01IS.....	4
1.1	Product Benefits.....	5
1.2	Connection Details.....	5
1.3	Dimensions.....	5

1 Intrinsically Conventional Manual Call Point MCP3A-R000SG-K013-01IS

An Intrinsically Safe version of our MCP3A indoor call point is available for installation in hazardous areas. These call points are manufactured to protect against other hazards. They are intended for use within Intrinsically Safe (I.S.) systems using suitable I.S. barriers.

Suitable IS Barriers:

- Pepperl & Fuchs - KFDO-Cs-Ex 1.51P (BAS98ATEX7343), KFDO-Cs-Ex 2.51P (BAS98ATEX7343)
- MTL - MTL4061 (BAS01ATEX7176), MTL5061 (BAS01ATEX7160)

A certified shunt zener barrier may be used having the following output parameters; Uz - 28V, I_{max} - 93.3mA, W_{max} - 0.67W

For a list of suitable barriers see reverse. Installation efficiency, flexibility and full compliance with the latest standards are at the heart of the Indoor Call Point range. Installation time and ultimately cost, are of paramount importance to any fire or security installer. The MCP range directly reflects this need by providing a unique 'plug and play' concept designed specifically to reduce installation time. All new MCP products utilize a special terminal block, where all initial installation cabling is terminated. This terminal block is then simply connected to the back of the MCP. Simple, but effective with no re-termination required and no time wasted.

Through new standards and legislation, both break glass and resettable operating elements can now be used within a manual call point. To provide you with the greatest 'flex-ability', the new MCP range can be configured as either a break glass or resettable unit by simply changing from one element to another. No other additional parts or alternative products need to be ordered.

All MCP Indoor Call Point products also help preserve the integrity of the overall system as illegal removal of the product lid will result in the call point operating and the system going in to alarm. The MCP3A product version is supplied with one normally open and one normally closed contact. Selecting either the "Normally Open" or "Normally Closed" contact is easily achieved by simply connecting the terminal block to the required connection in the back of the MCP3 Product. Single pole changeover switching can be achieved with the use of two terminal blocks


Model	Part code	Electrical configuration	Mounting	Operating Element	Markings
MCP3A-R000SG-K013-01IS	FFS06425151	N/O & N/C contacts 30VDC	Surface	Glass	EN54-11

N/O= Normally Open Contact
N/C= Normally Closed Contact

1.1 Product Benefits

- Unique “Plug & Play” installation concept
- Total “Flex-Ability” in the choice of operating element
- Anti-Tamper Facility
- Enhanced aesthetics
- Fully approved to the latest standards
- Backward compatibility
- CPR and Ex approved
- LPCB certificated

1.2 Connection Details

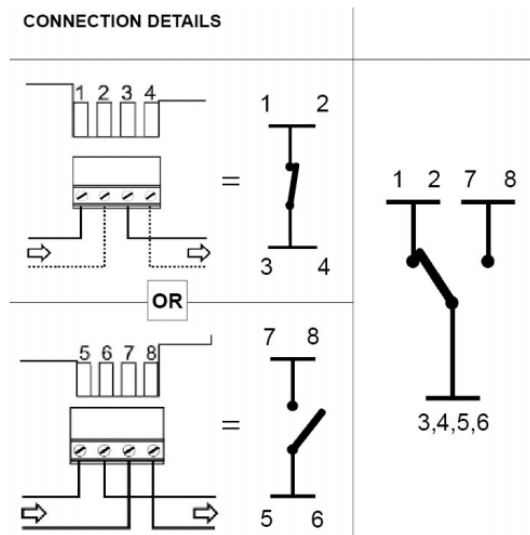

1.3 Dimensions

Material: PC/ABS
 Weight: 130g Flush
 180g Surface
 Colour: Red, Ral 3001

