

# Panel instruments

Schneider Electric panel instruments reliably comply with the most stringent standards, including IEC, MID, UL, etc., and we thoroughly test all products with recognized, third-party laboratories.

Our products are simple to install, configure, and use. This saves our partners time and money and lets them deliver the best solutions in a timely and cost-effective manner.

Whatever the size or type of application, the PowerLogic™ product line is an integral part of smart panels.

DB119006  
PB112024  
PB101118



16029



15202



16003



iAMP.



16029



iVLT.



16061

### Function

#### iAMP

Ammeters measure the current flowing through an electric circuit in amps.

#### iVLT

Voltmeters measure the potential (voltage) difference of an electric circuit in volts.

### Common technical data

- Accuracy: Class 1.5.
- Complies with standards IEC 60051-1, IEC 61010-1 and IEC 61000-4.
- Ferromagnetic device.
- Pseudo-linear scale over 90°.
- Ammeters (except catalog number 16029):
  - connection on CT, ratio  $I_n/5$ , to be ordered separately interchangeable dials.
- Temperature:
  - operating temperature: -25 °C to 55 °C
  - reference temperature: 23 °C
- Influence of temperature on accuracy:  $\pm 0.03\%/^{\circ}\text{C}$ .
- Utilisation frequency: 50 Hz to 60 Hz.
- Consumption:
  - AMP: 1.1 VA
  - VLT catalog number 15060: 2.5 VA
  - VLT catalog number 16061: 3.5 VA.
- Permanent overload:
  - AMP: 1.2  $I_n$
  - VLT: 1.2  $U_n$ .
- Maximum overload for 5 s:
  - AMP: 10  $I_n$
  - VLT: 2  $U_n$ .
- Connection: tunnel terminals for 1.5 to 6 mm<sup>2</sup> rigid cables.

### Commercial reference numbers

Type	Scale	Connection with CT	Width in mod. of 9 mm	Comm. ref. no.
<b>iAMP with direct connection</b>				
	0-30 A	no	8	<b>16029</b>
<b>iAMP with connection on CT</b>				
Basic device (delivered without dial)		X/5	8	<b>16030</b>
Dial	0-5 A			
	0-50 A	50/5		<b>16032</b>
	0-75 A	75/5		<b>16033</b>
	0-100 A	100/5		<b>16034</b>
	0-150 A	150/5		<b>16035</b>
	0-200 A	200/5		<b>16036</b>
	0-250 A	250/5		<b>16037</b>
	0-300 A	300/5		<b>16038</b>
	0-400 A	400/5		<b>16039</b>
	0-500 A	500/5		<b>16040</b>
	0-600 A	600/5		<b>16041</b>
	0-800 A	800/5		<b>16042</b>
	0-1000 A	1000/5		<b>16043</b>
	0-1500 A	1500/5		<b>16044</b>
	0-2000 A	2000/5		<b>16045</b>
<b>iVLT</b>				
	0-300 V		8	<b>16060</b>
	0-500 V		8	<b>16061</b>

See your Schneider Electric representative for complete ordering information.

PB112024



15202

iAMP.

PB112023



15201

iVLT.

PB112025



15208

iFRE.

## Function

### iAMP

Ammeters measure in amps the current flowing through an electric circuit.

### iVLT

Voltmeters measure in volts the potential (voltage) difference of an electric circuit.

### iFRE

Frequency meters measure in hertz the frequency of an electric circuit from 20 to 600 V AC.

## Common technical data

- Supply voltage: 230 V AC
- Operating frequency: 50 Hz to 60 Hz.
- Display by red LED: 3 digits, h = 8 mm (0.31 in).
- Accuracy at full-scale : 0.5 % ±1 digit.
- Consumption: max. 5 VA or rated 2.5 VA.
- Degree of protection:
  - IP40 on front face.
  - IP20 at terminal level.
- Connection: tunnel terminals for 2.5 mm<sup>2</sup> cables.

## Specific data

### 10 A direct reading ammeter

- Minimum value measured: 4 % of rating.
- Measurement input consumption: 1 VA.

### Multi-rating ammeter

- Ratings:
  - in direct reading: 5 A.
  - by CT (not supplied) configurable on the front face of the ammeter: 10, 15, 20, 25, 40, 50, 60, 100, 150, 200, 250, 400, 500, 600, 800, 1000, 1500, 2000, 2500, 4000, 5000 A.
- Minimum value measured: 4 % of rating.
- Measurement input consumption: 0.55 VA.

### Voltmeter

- Direct measurement: 0...600 V AC
- Input impedance: 2 MW.
- Minimum value measured: 4 % of rating.

### Frequency meter

- Minimum value measured: 20 Hz.
- Maximum value measured: 100 Hz.
- Full-scale display: 99.9 Hz.

### Compliance with standards

- Safety: IEC/EN 61010-1.
- EMC electromagnetic compatibility: IEC/EN 65081-1 and IEC/EN 65082-2.

## Commercial reference numbers

Type	Scale	Connection with CT	Width in mod. of 9 mm	Comm. ref. no.
Direct reading iAMP	0-10 A	No	4	15202
	0-5000 A	As per rating	4	15209
iVLT	0-600 V		4	15201
	20-100 Hz		4	15208

See your Schneider Electric representative for complete ordering information.



AMP for standard feeder.



16009



AMP for motor feeder.



16006



VLT.



16005

### Function

The 72 x 72 measurement devices are designed for flush-mounted installation on doors, wicket doors and front plates of enclosures and cubicles.

#### AMP

The ammeters measure in amps the current flowing through an electrical circuit.

#### VLT

The voltmeter measure in volts the potential difference (voltage) of an electrical circuit.

### Common technical data

- Accuracy: Class 1.5.
- Compliance with standard IEC 60051-1, IEC 61010-1 and IEC 61000-4.
- Ferromagnetic device.
- Scale length: 62 mm over 90°.
- Mounting in enclosure or in cubicle.
- Degree of protection: IP52.
- Maximum operating position: 30° / vertical.
- Temperature:
  - operation: -25 °C to 50 °C.
  - reference: 23 °C.
- Influence of temperature on accuracy: ±0.003 %/ °C.
- Utilisation frequency: 50 Hz to 60 Hz.

### AMP specific technical data

- Needs a In/5 CT to be ordered separately.
- Interchangeable dials to be ordered separately.
- Consumption: 1.1 VA.
- Permanent overload: 1.2 In.
- Maximum overload for 5 s: 10 In.

### VLT specific technical data

- Consumption: 3 VA.
- Permanent overload: 1.2 Un.
- Maximum overload for 5 s: 2 Un.

### Commercial reference numbers

Type	Scale	Connection on CT	Comm. ref. no.
<b>AMP for standard feeder</b>			
Basic device (delivered without dial)		X/5	<b>16004</b>
1.3 In dial	0-50 A	50/5	<b>16009</b>
	0-100 A	100/5	<b>16010</b>
	0-200 A	200/5	<b>16011</b>
	0-400 A	400/5	<b>16012</b>
	0-600 A	600/5	<b>16013</b>
	0-1000 A	1000/5	<b>16014</b>
	0-1250 A	1250/5	<b>16015</b>
	0-1500 A	1500/5	<b>16016</b>
	0-2000 A	2000/5	<b>16019</b>
<b>AMP for motor feeder</b>			
Basic device (delivered without dial)		X/5	<b>16003</b>
3 In dial	0-30-90 A	30/5	<b>16006</b>
	0-75-225 A	75/5	<b>16007</b>
	0-200-600 A	200/5	<b>16008</b>
<b>VLT</b>			
	0-500 V		<b>16005</b>

See your Schneider Electric representative for complete ordering information.



AMP for standard feeder.



16079



AMP for motor feeder.



16076



VLT.



16075

### Function

The 96 x 96 measurement devices are designed for flush-mounted installation on doors, wicket doors and front plates of enclosures and cubicles.

#### AMP

The ammeters measure in amps the current flowing through an electrical circuit.

#### VLT

The voltmeter measure in volts the potential difference (voltage) of an electrical circuit.

### Common technical data

- Accuracy: class 1.5.
- Compliance with standard IEC 60051-1, IEC 61010-1 and IEC 61000-4.
- Ferromagnetic device.
- Scale length: 80 mm over 90°.
- Mounting in enclosure or in cubicle.
- Degree of protection: IP52.
- Maximum operating position: 30° / vertical.
- Temperature:
  - operation: -25 °C to 50 °C.
  - reference: 23 °C.
- Influence of temperature on accuracy: ±0.003 % / °C.
- Utilisation frequency: 50 Hz to 60 Hz.

### AMP specific technical data

- Needs a In/5 CT to be ordered separately.
- Interchangeable dials to be ordered separately.
- Consumption: 1.1 VA.
- Permanent overload: 1.2 In.
- Maximum overload for 5S: 10 In.

### VLT specific technical data

- Consumption: 3 VA.
- Permanent overload: 1.2 Un.
- Maximum overload for 5S: 2 Un.

### Commercial reference numbers

Type	Scale	Connection on CT	Comm. ref. no.
<b>AMP for standard feeder</b>			
Basic device (delivered without dial)		X/5	<b>16074</b>
1.3 In dial	0-50 A	50/5	<b>16079</b>
	0-100 A	100/5	<b>16080</b>
	0-200 A	200/5	<b>16081</b>
	0-400 A	400/5	<b>16082</b>
	0-600 A	600/5	<b>16083</b>
	0-1000 A	1000/5	<b>16084</b>
	0-1250 A	1250/5	<b>16085</b>
	0-1500 A	1500/5	<b>16086</b>
	0-2000 A	2000/5	<b>16087</b>
	0-2500 A	2500/5	<b>16088</b>
	0-3000 A	3000/5	<b>16089</b>
	0-4000 A	4000/5	<b>16090</b>
	0-5000 A	5000/5	<b>16091</b>
0-6000 A	6000/5	<b>16092</b>	
<b>AMP for motor feeder</b>			
Basic device (delivered without dial)		X/5	<b>16073</b>
3 In dial	0-30-90 A	30/5	<b>16076</b>
	0-75-225 A	75/5	<b>16077</b>
	0-200-600 A	200/5	<b>16078</b>
<b>VLT</b>			
	0-500 V		<b>16075</b>

See your Schneider Electric representative for complete ordering information.

### Function

The 48 x 48 selector switches are designed for flush-mounted installation on doors, wicket doors and front plates of enclosures and cubicles.

#### CMA

The ammeter selector switch uses a single ammeter (by means of current transformers) for successive measurement of the currents of a three-phase circuit.

#### CMV

The voltmeter selector switch uses a single voltmeter for successive measurement of the voltages (phase-to-phase and phase-to-neutral) of a three-phase circuit.

### Common technical data


- Durability:
  - electrical: 100,000 operations.
  - mechanical: 2,000,000 operations.
- AgNi contact.
- Operating temperature: -25 °C to 50 °C.
- Compliance with standards IEC/EN 60947-3.
- Degree of protection:
  - IP65 on front face.
  - IP20 at terminal level.

### Commercial reference numbers


Type	Rating (A)	Voltage (V)	Number of positions	Comm. ref. no.
CMA	20		4	16017
CMV		500	7	16018

See your Schneider Electric representative for complete ordering information.

### Connection

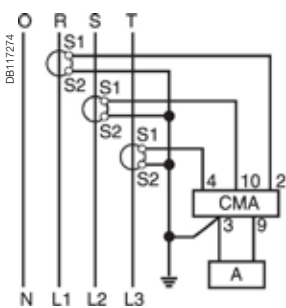

CMA.



CMV.



Reading 3 phase-to-earth voltages + 3 phase-to-phase voltages.

**Note:** when connecting do not remove the pre-cabling.

See appropriate Installation Guide for this product.



15126

iCMA.



15125

iCMV.

### Function

#### iCMA

This 4-position ammeter selector switch uses a single ammeter (using current transformers) for successive measurement of the currents of a three-phase circuit.

#### iCMV

This 7-position voltmeter selector switch uses a single voltmeter for successive measurement of voltages (phase-to-phase and phase-to-neutral) of a three-phase circuit.

### Common technical data


- Rotary handle.
- Maximum operating voltage: 440 V, 50/60 Hz.
- Nominal thermal current: 10 A.
- Operating temperature: -20 °C to 55 °C.
- Storage temperature: -25°C to 80°C.
- Mechanical durability (AC21A-3 x 440 V): 2,000,000 operations.
- Degree of protection:
  - IP66 on front face.
  - IP20 at terminal level.
- Electrical durability: 1,000,000 operations.
- Connection: jumper terminals with captive screws, for cables up to 1.5 mm<sup>2</sup>.
- Complies with standards: IEC/EN 60947-3.

### Commercial reference numbers

Type	Rating (A)	Voltage (V AC)	Width in mod. of 9 mm	Comm. ref. no.
iCMA	10	415	4	15126
iCMV	10	415	4	15125

See your Schneider Electric representative for complete ordering information.

### Connection

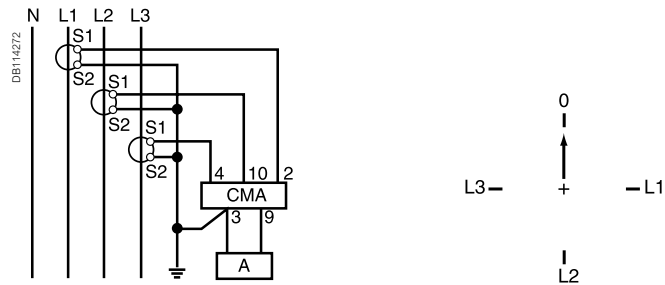

iCMA.



iCMV.

See appropriate Installation Guide for this



PE112026



15440

iCH "DIN".



DB119003



15607

CH "48 x 48".

### Function

Electromechanical counter that counts the operating hours of a machine or piece of electrical equipment. Giving a precise indication of operating time, the counter is used to decide when to carry out preventive maintenance.

### Common technical data

- Electromechanical display.
- Maximum display: 99999.99 hours.
- Display accuracy: 0.01 %.
- Without reset.
- Storage temperature: -25 °C to 85 °C.
- Connection: tunnel terminals for 2.5 mm<sup>2</sup> cable.

### Specific technical data

#### iCH "DIN"

- Consumption: 0.15 VA.
- Operating temperature: -10 °C to 70 °C.
- Mounting on DIN rail.

#### CH "48 x 48"


- Consumption:
  - 15607: 0.25 VA
  - 15608: 0.15 VA
  - 15609: 0.02 VA to 12 V and 0.3 VA to 36 V.
- Operating temperature: -20 °C to 70 °C.
- Degree of protection: IP65 on front face.
- Mounting on front face of monitoring switchboards.

### Commercial reference numbers


Type	Voltage (V)	Width in mod. of 9 mm	Comm. ref. no.
iCH "DIN"	230 V AC ± 10 %/50 Hz	4	15440
CH "48 x 48"	24 V AC ± 10 %/50 Hz		15607
	230 V AC ± 10 %/50 Hz		15608
	12 to 36 V DC		15609

See your Schneider Electric representative for complete ordering information.

### Connection



iCH "DIN".



CH "48 x 48".

See appropriate Installation Guide for this



iCI, eps



15443

iCI impulse counter

### Function

Electromechanical counter designed to count impulses emitted by: kilowatt-hour meters, temperature overrun detectors, people meters, speed meters, etc.



### Common technical data

- Supply and metering voltage: 230 V AC  $\pm$  10 %, 50/60 Hz.
- Consumption: 0.15 VA.
- Maximum display: 9 999 999 impulses.
- Without reset.
- Metering data:
  - minimum impulse time: 50 ms
  - minimum time between 2 impulses: 50 ms.
- Storage temperature: -25 °C to 85 °C.
- Operating temperature: -10 °C to 70 °C.
- Connection: tunnel terminals for 2.5 mm<sup>2</sup> cable.

### Commercial reference numbers


Type	Width in mod. of 9 mm	Comm. ref. no.
iCI	4	<b>15443</b>

### Connection

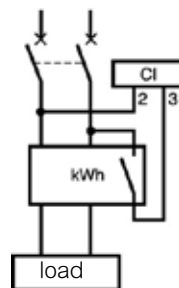


See appropriate Installation Guide for this


Analog ammeters and voltmeters iAMP, iVLT

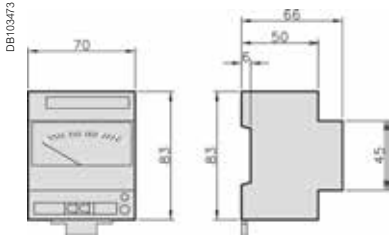


Digital ammeters, voltmeter and frequency meter iAMP, iVLT

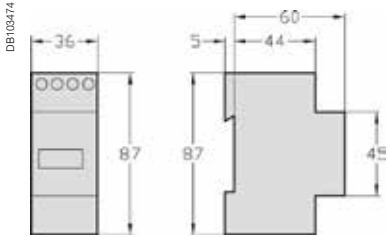


iCMA and iCMV selector switches

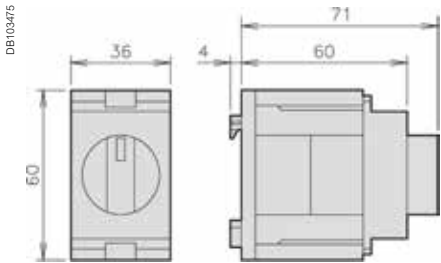

72 x 72 analog ammeters and voltmeter

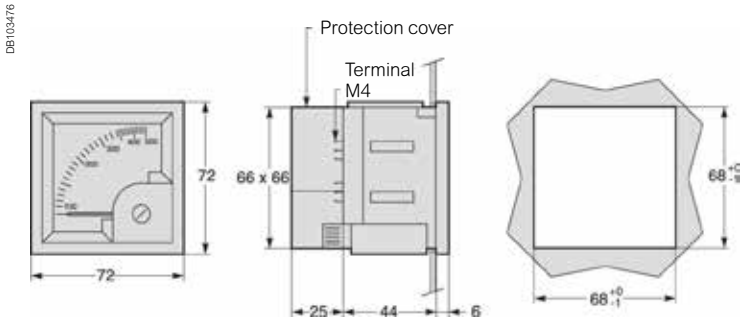


96 x 96 analog ammeters and voltmeter

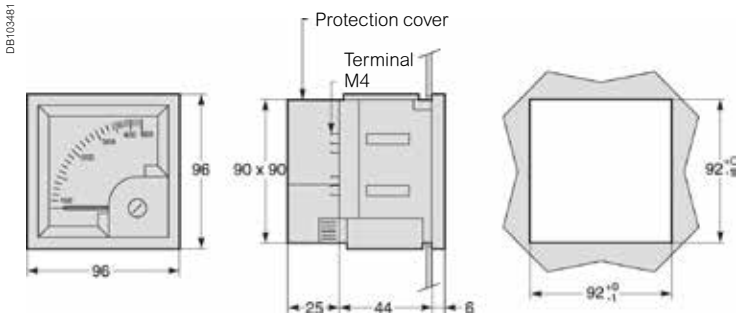


See the appropriate Installation Guide for this product.


48 x 48 CMA and CMV selector switches

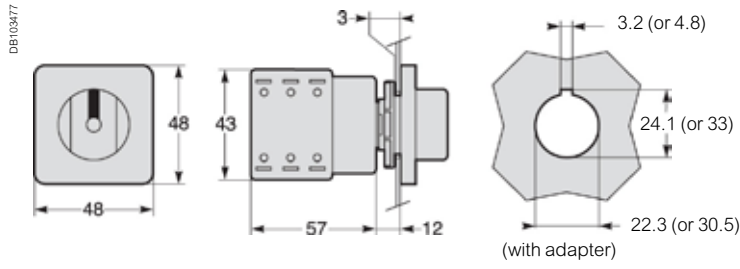

iCI impulse counter and iCH hour counter

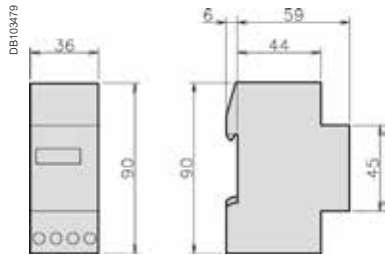

48 x 48 CH hour counters

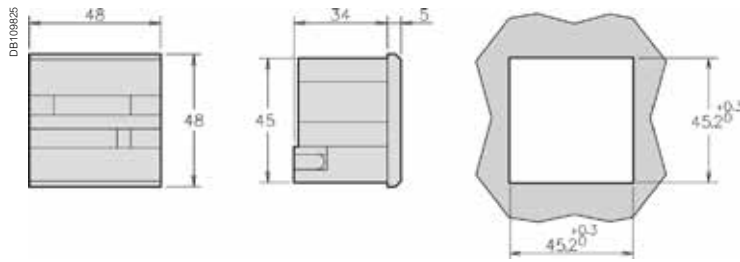

See the appropriate Installation Guide for this product.