


Security Expert Security Purpose Output Expansion

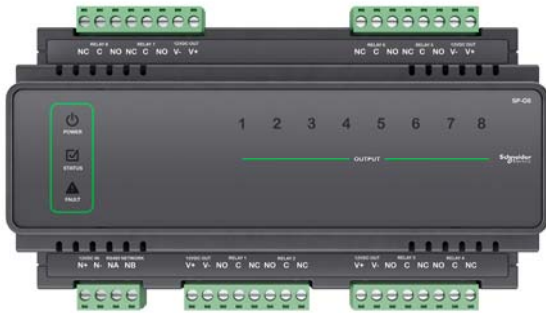

The Security Expert Security Purpose Output Expansion provides the control of 8 high current Form C relay outputs. It provides extensive hardware advancements that provide flexible access control, area control and alarm monitoring. This device is designed for use with industry standard DIN Rail mounting.

Feature Highlights

- 8 Form C relays capable of switching resistive loads up to 7 Amps
- Ideal for connection in an electrical switch room to control signage, lighting and building automation
- LED indicators to show state of all onboard relays
- High performance 32 Bit processor
- Secure encrypted RS-485 module communications
- Online and remote upgradable firmware
- Designed for use with industry standard DIN Rail mounting

Power Supply

Device power is supplied from a 12VDC input. Ultra low current requirements ensure cost effective power distribution.

Connectivity and System Expansion

Expanding the Security Expert System with outputs from the Output Expansion allows convenient, cost effective expansion and added benefit of:

- 8 multi-function outputs for use in any programmable output entry
- Ideal for connection in an electrical switch room to control signage, lighting and building automation
- Address configuration of the Output Expansion is achieved using the address programming feature of the Security Expert System Controller
- Outputs can be configured to automatically turn on when powered up, communication failure, or to resume previous state

Communication

Single RS-485 communication interface port used for all network communication functions and interconnection to other modules.

Upgradable Firmware

Utilizing the latest flash technology and high performance communication mediums, the firmware can be updated using the Loadit utility over the system module network.

Technical Specifications

Power Supply	
DC Input Voltage	11-14VDC
DC Output Voltage (DC IN Pass-Through)	10.83-14.0VDC 0.7A (Typical) Electronic Shutdown at 1.1A
Operating Current	80mA (Typical)
Total Combined Current*	3.25A (Max)
Low Voltage Cutout	8.7VDC
Low Voltage Restore	10.5VDC
Communication	
RS-485	Module Network
Outputs	
PGM Outputs	8 Form C relays - 7A N.O./N.C. at 30 VAC/DC resistive/inductive
Dimensions	
Dimensions (L x W x H)	156.8 x 90 x 60mm (6.17 x 3.54 x 2.36")
Weight	482g (17oz)
Temperature	
Operating	0°-50°C (32° - 122°F)
Storage	-10° - 85°C (14° - 185°F)
Humidity	0%-93% non-condensing, indoor use only (relative humidity)

* The Total Combined Current refers to the current that will be drawn from the external power supply to supply the Output Expansion and any devices connected to the Expander's outputs. The Auxiliary outputs are directly connected via electronic fuses to the N+ N- input terminals, and the maximum current is governed by the trip level of these fuses.

Ordering Information

SP-O8	Security Expert Security Purpose Output Expansion
-------	---

Regulatory Notices

Federal Communications Commission (FCC)

FCC Rules and Regulations CFR 47, Part 15, Class A.

This equipment complies with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference; (2) This device must accept any interference received, including interference that may cause undesired operation.

Industry Canada

ICES-003

This is a Class A digital device that meets all requirements of the Canadian Interference-Causing Equipment Regulations.

CAN ICES-3 (A)/NMB-3(A)

RCM (Australian Communications and Media Authority (ACMA))

This equipment carries the RCM label and complies with EMC and radio communications regulations of the Australian Communications and Media Authority (ACMA) governing the Australian and New Zealand (AS/NZS) communities.

CE – Compliance with European Union (EU)

Conforms to European Union (EU) Low Voltage Directive (LVD) 2014/35/EU, Electro-Magnetic Compatibility (EMC) Directive 2014/30/EU and RoHS Recast (RoHS2) Directive: 2011/65/EU.

This equipment complies with the rules of the Official Journal of the European Union for governing the Self Declaration of the CE Marking for the European Union as specified in the above directive(s).

UL/ULC (Underwriters Laboratories)

- UL 294 for Access Control System Units
- UL1610 for Central-Station Burglar-Alarm Units
- CAN/ULC S319 for Electronic Access Control Systems
- CAN-ULC S304 for Signal Receiving Centre And Premise Burglar Alarm Control Units
- CAN/ULC S559 for Fire Signal Receiving Centres And Systems