



21180


fr en de it es pt
nl se no dk fi

Découvrez / Discover / Allgemeines / Scoprite /
Descubra / Descubra / Omschrijving / Upptäck /
Obs! / Opdag / Tutustuminen

RCP




Schneider
Electric

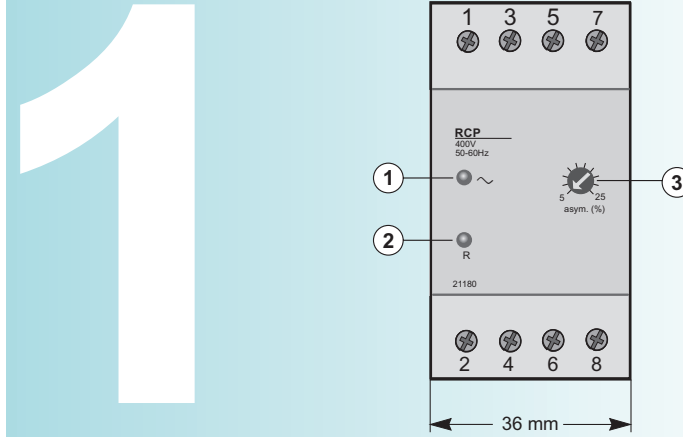

	fr	en	de	it	es	pt	nl	se	no	dk	fi
RCP	relais de contrôle de phases	phase control relay	Phasenkontrollrelais	relè di controllo delle fasi	ajuste de control de fases	relé de control de fases	fasecontrole-relais	relä för fasstyrning	fasekontroll-relé	fasestyre-relæ	vaiheensäätörele
1	présence tension vert	mains "on" green indicator	Spannungsanzeige grün	presenza tensione verde	presencia de tensión verde	presença tensão verde	spanning aanwezig groen	spänning närvarande (grön lampa)	grønn indikator for spenning på	grøn indikator for tilstedeværelse af spænding	jännitteen merkivalo (vihreä)
2	défaut rouge	fault red indicator	Fehler rot	difetto rosso	defecto rojo	defeito vermelho	defect rood	fel (röd lampa)	rød feil	rød fejl	virheen merkivalo (punainen)
3	réglage de l'asymétrie 5 à 25% (de 400 V)	asymetry adjustment 5 to 25% (400 V)	Einstellung der Asymetrie 5 bis 25% (400 V)	regolazione dell'asimetria dal 5 al 25% (400 V)	ajuste de la asimetria 5 a 25% (400 V)	regulação da assimetria 5 a 25% (400 V)	instellen van asymmetrie 5 tot 25% (400 V)	asymmetri-inställning 5 till 25% (400 V)	asymmetrijustering 5 til 25% (400 V)	asymmetrijustering 5 til 25% (400 V)	asymmetri-an säätö 5:stä 25%:iin (400 V)



Branchez / Connect / Anschluß / Collegare / Ajuste / Ligue / Aansluiten / Anslut /
Tilkopling / Tilslut / Kytkeminen

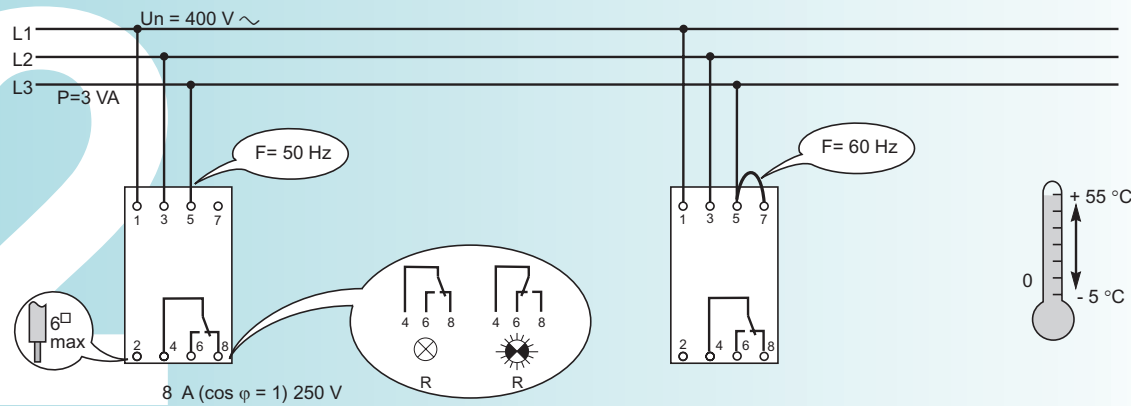

Réglez / Adjust / Einstellung / Regolate / Funcionamiento / Regule / Afstellen /
Ställ in / Innstilling / Indstil / Säätö

