


# MULTIPLES OF TRIP CURRENT RATING

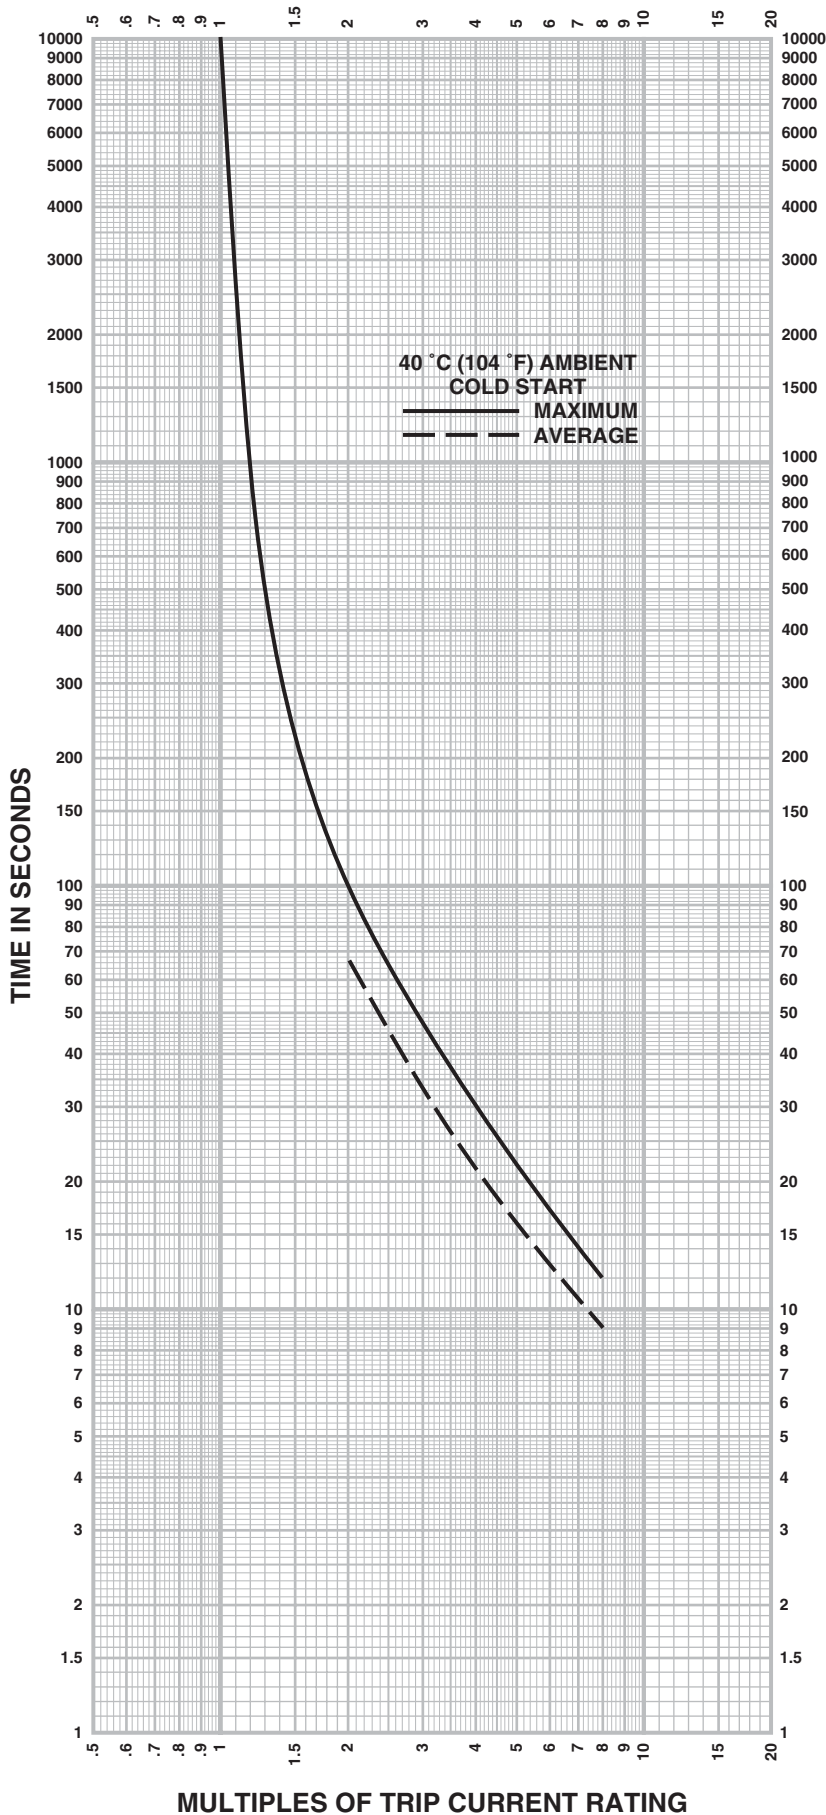

## OVERLOAD RELAY TIME-CURRENT CHARACTERISTICS REFERENCE DRAWING NO. 30068-419A

|                    |            |
|--------------------|------------|
| Relay Design       | Bimetallic |
| Thermal Unit Types | AR.45-AR35 |

40 °C ambient cold start trip time characteristics of:

|                       |                         |
|-----------------------|-------------------------|
| Equipment             | Separate Overload Relay |
| Size                  | 26 A (nominal)          |
| Type                  | SEO6B2                  |
| Series                | A                       |
| Qty. of Thermal Units | 3                       |

When installed in:

- Hinged door and all other (larger) enclosures

The trip current rating can be determined from the instructions given with the appropriate thermal unit selection table. The characteristics shown do not necessarily apply to equipment manufactured before the date of the referenced drawing.

TIME IN SECONDS

TIME IN SECONDS

MULTIPLES OF TRIP CURRENT RATING

