

230 Series Exterior Meter Enclosures



QUEENSLAND

Meters ahead for ease of installation and consumer safety

The new Clipsal 230 Series of Exterior Queensland Meter and Combined Meter/Switchboard Enclosures are packed with features that make them perfect for all domestic outdoor locations.

Our new 230 Series is designed to provide ease of installation and consumer safety, with a range of functional options to suit any application.

Constructed from robust, spot welded Galvabond, the boxes have an attractive merino beige painted outer finish. This also acts as an ideal primer for subsequent painting.


The doors can be held open at 100 degrees and are easily removed if required. Our special hinge design helps door location and is therefore easy to replace. Ventilation louvres are designed to suit IP23. All edges are folded to ensure safety, and minimise risk of damage to cables and personal injury.

Each model is easy to install. All have plenty of wiring room and a range of well located cable knockouts. Relevant marking guides and labels are also included with each unit.



230 Series Exterior

230DRAQTP (Temporary supply AS/NZS3012 compliant)

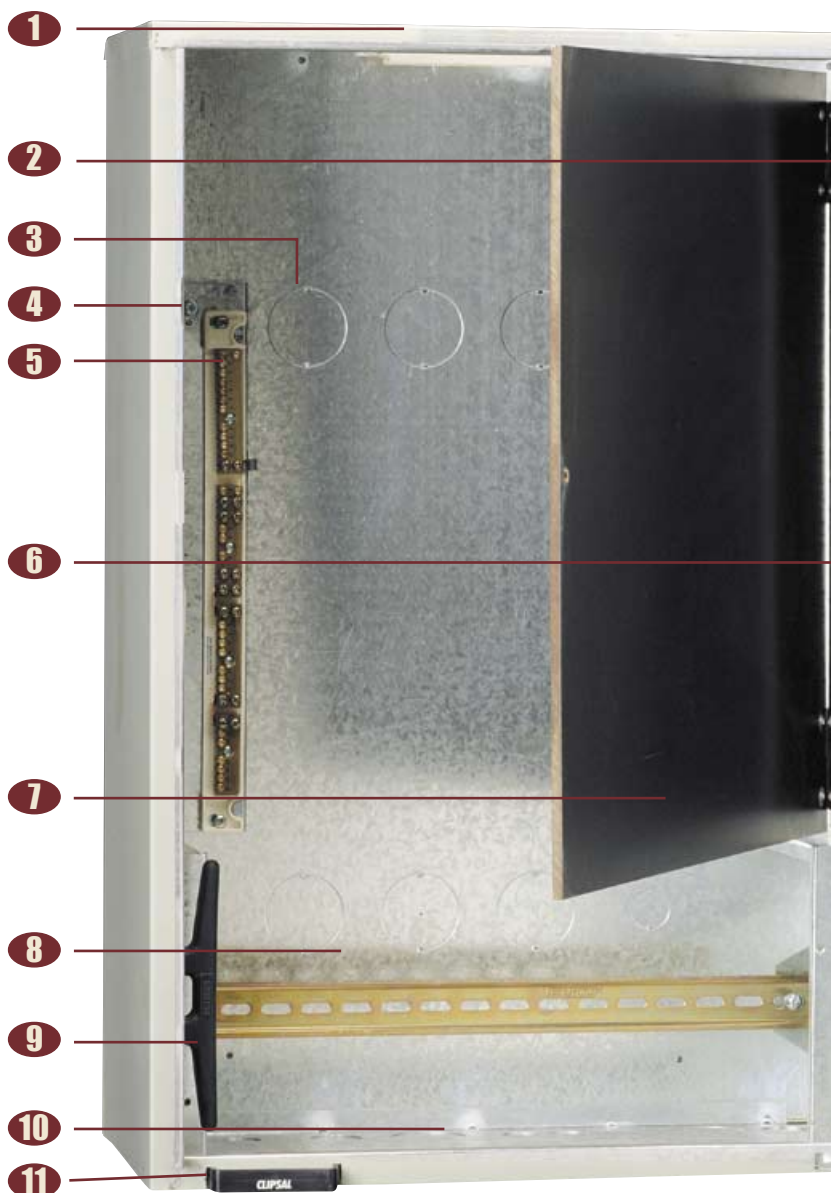

Built to the highest standards

IP23 rated, all 230 Series Enclosures are designed to comply with Australian Standards and the Queensland Service Installation Rules.




Meter Enclosures



Features

- 1** Weather rib provided.
- 2** Double rivets to hinge for increased strength.
- 3** 6 x 50mm and 2 x 32mm rear knockouts into meter section.
- 4** Earth Stud mounted adjacent earth bar, with nut, washer and crimp lug.
- 5** Neutral and Earth Bar Grid Assembly.
1 x 35mm² / 11 x 10mm² Earth
4 x 25mm² / 4 x 10mm² Neutral
2 x 35mm² / 7 x 10mm² RCD Neutral
1 x 35mm² / 6 x 10mm² RCD Neutral
- 6** Meter panel is double hinged; swings forward or fully removed for easy access and wiring.
- 7** 480mm wide x 455mm high hinged panel with provision for 2 meters.
- 8** Generous wiring room behind switchboard escutcheon for easy and quick wiring installation.
- 9** Lead tie-off point.
TIME SAVER! Pre-assembled internal lead tie off point saves installation time.
- 10** 2 x 50mm, 3 x 32mm and 3 x 25mm bottom entries knockouts.
- 11** Protective slider for temporary power cable access.
- 12** 21 Modules of full DIN. Suits Clipsal 4RCBE120/30 1MOD, 1POLE MCB/RCD.
- 13** Gland and slider for easy cable installation.
- 14** Circuit identification labels and 14 pole busbar provided.
- 15** Lock device optional.

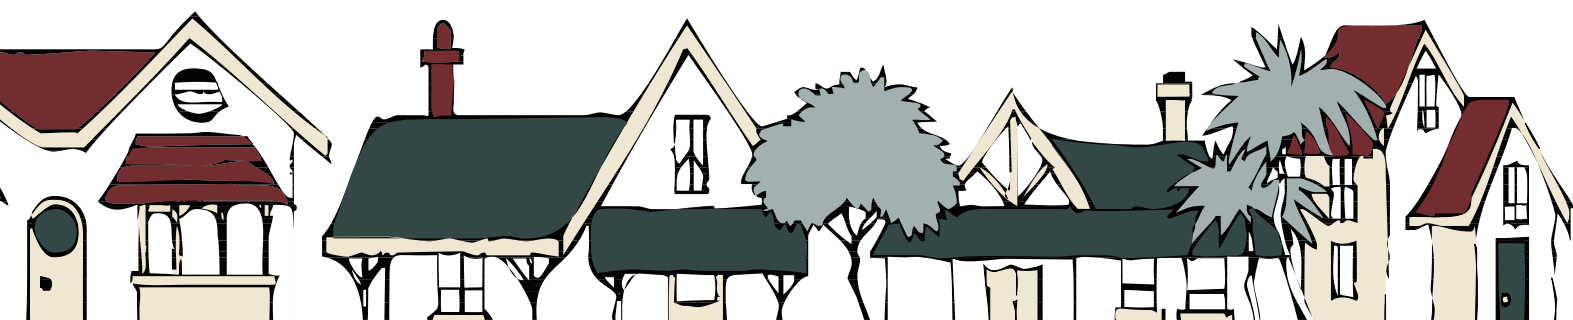

230MQ

Completing the 230 Queensland Domestic range is our 230MQ Meter Box, which features all the same structural design qualities as the other 230 Series Units. Once again, this model has been designed with an emphasis on easy installation, flexibility and consumer safety.



Product Range

Catalogue Number	Description
230DRAQ	Combined Meter/Switchboard Enclosure 21 module - 698H x 470W x 280D
230DRAQTP	Same as 230DRAQ but suitable for use as temporary supply (AS/NZS3012)
230MQ	Meter Enclosure only - 525H x 470W x 280D

Products of Gerard Industries Pty Ltd

ABN 27 007 873 529

Head Office

12 Park Terrace, Bowden
South Australia 5007
Telephone (08) 8269 0511
Facsimile (08) 8340 1724
Internet clipsal.com
E-Mail plugin@clipsal.com.au

QLD Brisbane (07) 3244 7444
Townsville (07) 4729 3333

Customer Service

Free Fax (0508) 250 305
Free Phone (0508) CLIPSAL
2547725

You can find this brochure and many others online in PDF format at:
clipsal.com

Follow the links off the home page or access the following page directly:
clipsal.com/wat_lib_pdf.cfm

clipsal.com

Gerard Industries Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.