


Product Environmental Profile

Exiway Smartled non maintained

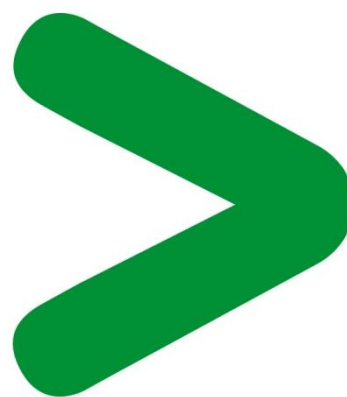

Product Environmental Profile – PEP

Product overview

The main purpose of the “Exiway Smartled non maintained” product range is to provide emergency lighting and it is designed in compliance with the European standard EN60598-2-22.

Functional unit: to provide emergency lighting in case of mains failure, for 10 years

All the products of this range are non-maintained.

The light source is made up of white LED with a lifespan of at least 10 years.

The range includes standard and self-testing luminaires. It is possible to connect the luminaires of this range to a remote control to optimize the energy consumption.

This range consists of 14 references

Commercial reference	IP Protection rating	IK Mechanical shock index	Consumption in Watts	Lumen emission in emergency mode
OVA48300	65	IK7	0,32	120
OVA48301	65	IK7	0,57	180
OVA48302	65	IK7	0,71	180
OVA48305	65	IK7	0,32	280
OVA48307	65	IK7	1,04	270
OVA48308	65	IK7	0,71	300
OVA48309	65	IK7	1	460
OVA48310	65	IK7	0,38	480
OVA48311	65	IK7	0,44	490
OVA48312	65	IK7	1,1	610
OVA48313	65	IK7	0,41	600
OVA48101	65	IK7	0,714	300
OVA48103	65	IK7	0,41	400
OVA48104	65	IK7	1,1	610


The representative product used for the analysis is EXIWAY-SMARTLED IP65 ACT.L/610/1NC ref. OVA48312.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

The environmental analysis was performed in conformity with ISO 14040.

Constituent materials

The mass of the product range is from 770g and 930g including packaging. It is 920g for the EXIWAY-SMARTLED IP65 ACT.L/610/1NC ref. OVA48312. The constituent materials are distributed as follows:

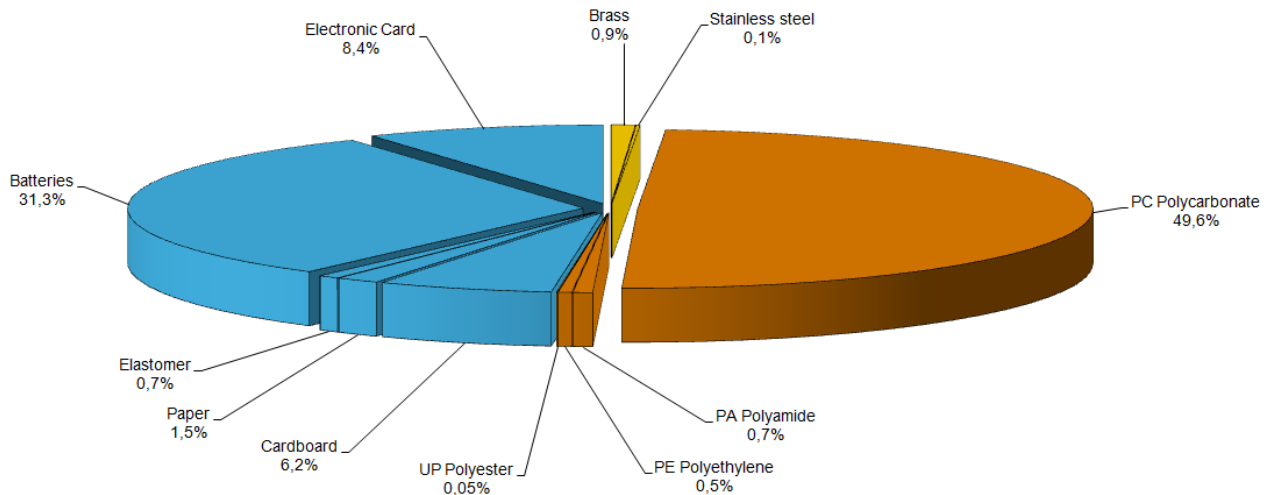

Substance assessment

Products of this range are designed in conformity with the requirements of the European RoHS Directive 2011/65/EU and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric [Green Premium website](http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page) . (<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>)

Manufacturing

The “Exiway Smartled non maintained” product range is manufactured at a Schneider Electric production site on which an ISO14001 certified environmental management system has been established.

Distribution

The weight and volume of the packaging have been optimized, based on the European Union's packaging directive.

The “Exiway Smartled non maintained” packaging weight is 71 g. It consists of cardboard (57g) and paper (14g).

The product distribution flows have been optimised by setting up local distribution centres close to the market areas.

Product Environmental Profile – PEP

Use

The products of the “**Exiway Smartled non maintained**” range do not generate environmental pollution (noise, emissions) requiring special precautionary measures in standard use.

The electrical power consumption depends on the conditions under which the product is implemented and used. The electrical power consumed by the “**Exiway Smartled non maintained**” range is between 0.32 W and 1.1 W. It is 2.28W for 1% in active mode and 1.1W for 99% in standby mode for the referenced **EXIWAY-SMARTLED IP65 ACT.L/610/1NC** ref. **OVA48312**.

During the Product's service life, the substitution of the batteries is needed when the product becomes unable to maintain the rated performance. The standard battery lifetime of 4 years have been considered. The substitution operation is required 1.5 times.

End of life

At end of life, the products in the “**Exiway Smartled non maintained**” have been optimized to decrease the amount of waste and allow recovery of the product components and materials.

This product range contains batteries and an electronic card that should be separated from the stream of waste so as to optimize end-of-life treatment by special treatments. The location of these components and other recommendations are given in the End of Life Instruction document which is available for this product range on the Schneider-Electric Green Premium website [Green Premium website](http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page) (<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>).

The recyclability potential of the products has been evaluated using the “ECO DEEE recyclability and recoverability calculation method” (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio without packaging is: 71%.

As described in the recyclability calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

Environmental impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I) Use (U), and End of life (E).

Modelling hypothesis and method:

- The calculation was performed on **EXIWAY-SMARTLED IP65 ACT.L/610/1NC** ref. **OVA48312**
- Product packaging is included.
- Installation components: no special components included.
- Scenario for the Use phase: this product range is included in the category 2, Energy consuming products.
- Assumed service lifetime is 10 years and use scenario is 2.28W for 1% in active mode and 1.1W for 99% in standby mode.
- The geographical representative area for the assessment is Europe and the electrical power model used for calculation is European model.
- End of life impacts are based on a worst case transport distance to the recycling plant (1000km)

Product Environmental Profile – PEP

Presentation of the product environmental impacts

Environmental indicators	Unit	For 1 EXIWAY-SMARTLED IP65 ACT.L/610/1NC ref. OVA48312					
		S = M + D + I + U + E	M	D	I	U	E
Air Acidification (AA for PEP)	kg H+ eq	1.7337E-02	4.7526E-03	2.9608E-05	0*	1.2424E-02	1.3067E-04
Air Toxicity (AT for PEP)	m ³	2.0788E+07	6.1395E+06	4.4012E+04	0*	1.4410E+07	1.9461E+05
Energy Depletion (ED for PEP)	MJ	1.3428E+03	1.6619E+02	2.2193E+00	0*	1.1650E+03	9.3815E+00
Global Warming Potential (GWP for PEP)	kg CO ₂ eq.	6.8316E+01	9.9477E+00	1.5779E-01	0*	5.7544E+01	6.6595E-01
Hazardous Waste Production (HWP for PEP)	kg	1.3052E-01	1.2065E-01	1.9493E-07	0*	9.8719E-03	8.2401E-07
Ozone Depletion Potential (ODP for PEP)	kg CFC-11 eq.	1.3679E-05	5.6775E-07	2.9840E-10	0*	1.3110E-05	1.2614E-09
Photochemical Ozone Creation Potential (POCP for PEP)	kg C ₂ H ₄ eq.	7.0542E-03	3.2920E-03	4.0667E-05	0*	3.5557E-03	1.6575E-04
Raw Material Depletion (RMD for PEP)	Y-1	3.5611E-14	3.4818E-14	3.2184E-18	0*	7.7619E-16	1.3605E-17
Water Depletion (WD for PEP)	dm ³	3.9033E+02	2.4024E+02	1.6352E-02	0*	1.5000E+02	6.9124E-02
Water Eutrophication (WE for PEP)	kg PO ₄ ³⁻ eq.	1.1522E-02	1.0974E-02	2.9262E-07	0*	5.4702E-04	1.2370E-06
Water Toxicity (WT for PEP)	m ³	2.9133E+01	3.1613E+00	6.7317E-02	0*	2.5619E+01	2.8457E-01

Life cycle assessment has been performed with the EIME software (Environmental Impact and Management Explorer), version 5 and with its database version 2013-02

The **U** phase is the life cycle phase which has the greatest impact on the majority of environmental indicators.

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range: the environmental indicators (without RMD) of other products in this family may be proportional extrapolated by energy consumption values". For RMD, impact may be proportional extrapolated by mass of the product.

This product range benefits from a general reduction of the mass, in respect to previous product ranges with similar lighting performance, which reduces the impacts on the environment.

System approach

Thanks to the improved efficiency of the led light source and electronic card,. the use of the Exiway Smartled range of products brings to a reduction of energy consumption compared to other products with similar lighting performance.

The use of a remote control to place the system on stand-by in periods when the establishment is idle can reduce the environmental impact of your installation by as much as 20% and reduce your electricity bill

As the products of the range are designed in accordance with the European RoHS Directive 2011/65/EU, they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Glossary

Air Acidification (AA)	The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H ⁺ .
Air Toxicity (AT)	This indicator represents the air toxicity in a human environment. It takes into account the usually accepted concentrations for several gases in the air and the quantity of gas released over the life cycle. The indication given corresponds to the air volume needed to dilute these gases down to acceptable concentrations.
Energy Depletion (ED)	This indicator gives the quantity of energy consumed, whether it is from fossil, hydroelectric, nuclear or other sources. It takes into account the energy from the material produced during combustion. It is expressed in MJ.
Global Warming (GW)	The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO ₂ .
Hazardous Waste Production (HWP)	This indicator quantifies the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.
Ozone Depletion (OD)	This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.
Photochemical Ozone Creation (POC)	This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C ₂ H ₄).
Raw Material Depletion (RMD)	This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.
Water Depletion (WD)	This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm ³ .
Water Eutrophication (WE)	Eutrophication is a natural process defined as the enrichment in mineral salts of marine or lake waters or a process accelerated by human intervention, defined as the enrichment in nutritive elements (phosphorous compounds, nitrogen compounds and organic matter). This indicator represents the water eutrophication of lakes and marine waters by the release of specific substances in the effluents. It is expressed in grams equivalency of PO ₄ ³⁻ (phosphate).
Water Toxicity (WT)	This indicator represents the water toxicity. It takes into account the usually accepted concentrations for several substances in water and the quantity of substances released over the life cycle. The indication given corresponds to the water volume needed to dilute these substances down to acceptable concentrations.

PEP achieved with Schneider-Electric TT01 10.4 and TT02 V20 procedures in compliance with ISO14040 series standards

PEP in line with PEP ecopassport PCR : PEP-PCR-ed 2.1-EN-2012 12 11

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com