Product Environmental Profile

Homeline™ Load Centers







General information

Representative product

Homeline™ Load Centers - HOM4080L225PC

Description of the product

Square D™ Homeline™ Load Centers are listed to comply with standards for lighting and appliance panelboards to distribute power in residential, commercial and industrial applications. Homeline Load Centers are tested and listed only for Homeline circuit breakers.


Functional unit

Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure or a cabinet having the following dimensions 1000mm x362mm x 95mm, that is certified for UL 67.

Constituent materials

Reference product mass

16010 g including the product, its packaging and additional elements and accessories

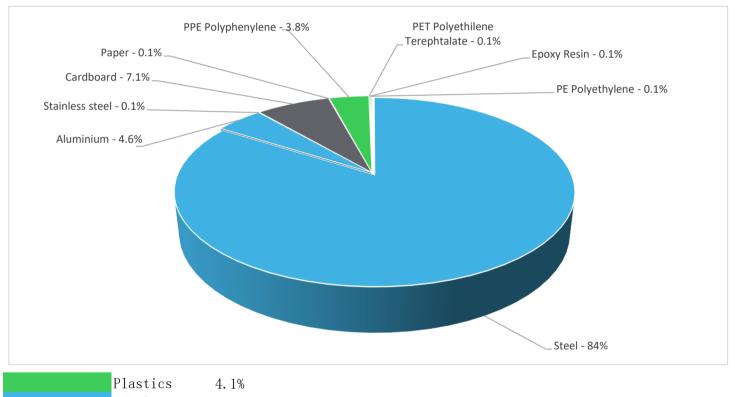

Plastics 4.1%
Metals 88.7%
Others 7.2%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE, Bis(2-ethylhexyl) phthalate - DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




The Homeline™ Load Centers presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
	Packaging weight is 1188.7 g, consisting of Cardboard (98.43%),Paper (0.74%),PE film(0.83%)					
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 89% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

Environmental impacts

Reference life time	20 years					
Product category	Unequipped enclosures and cabinets					
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.					
Use scenario	Non applicable for unequipped enclosures and cabinets					
Geographical representativeness	United States					
Technological representativeness	All the technologies pertaining to product manufacturing are represented in manufacturing phase properly					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Tlaxcala Mexico	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US		

Compulsory indicators	Homeline™ Load Centers - HOM4080L225PC						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.82E-02	1.82E-02	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	3.27E-01	3.13E-01	9.43E-03	2.70E-04	8.36E-05	4.31E-03
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3.96E-02	3.63E-02	2.17E-03	6.84E-05	2.20E-05	1.03E-03
Contribution to global warming	kg CO ₂ eq	8.38E+01	8.01E+01	2.07E+00	6.48E-02	8.73E-02	1.50E+00
Contribution to ozone layer depletion	kg CFC11 eq	9.91E-06	9.81E-06	4.18E-09	0*	1.58E-09	9.02E-08
Contribution to photochemical oxidation	kg C₂H₄ eq	2.78E-02	2.66E-02	6.73E-04	2.02E-05	1.34E-05	4.65E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5.73E+00	5.72E+00	0*	0*	0*	1.74E-03
Total Primary Energy	MJ	1.61E+03	1.55E+03	2.92E+01	8.44E-01	1.18E+00	2.17E+01

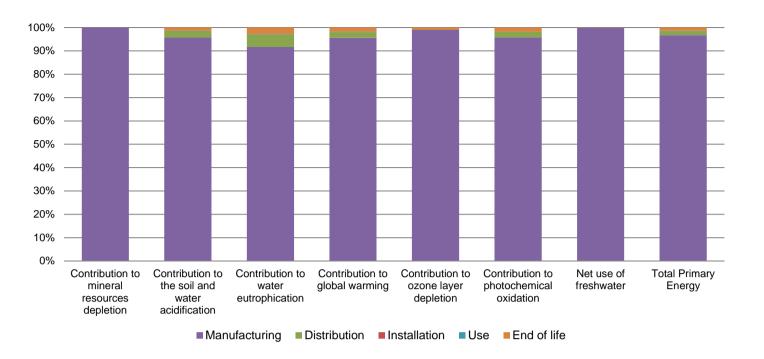

Optional indicators		Homeline™ Load Centers - HOM4080L225PC					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	8.25E+02	7.77E+02	2.90E+01	8.37E-01	1.06E+00	1.74E+01
Contribution to air pollution	m³	2.65E+04	2.62E+04	8.79E+01	2.65E+00	7.42E+00	1.53E+02
Contribution to water pollution	m³	4.28E+03	3.76E+03	3.40E+02	9.79E+00	4.31E+00	1.66E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3.29E-01	3.29E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.07E+01	3.06E+01	3.89E-02	0*	7.06E-02	2.43E-02
Total use of non-renewable primary energy resources	MJ	1.57E+03	1.52E+03	2.92E+01	8.43E-01	1.11E+00	2.16E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	7.29E+00	7.16E+00	3.89E-02	1.53E-03	7.06E-02	2.43E-02
Use of renewable primary energy resources used as raw material	MJ	2.34E+01	2.34E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.55E+03	1.50E+03	2.92E+01	8.43E-01	1.11E+00	2.16E+01
Use of non renewable primary energy resources used as raw material	MJ	2.54E+01	2.54E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.45E+03	1.44E+03	0*	0*	0*	1.66E+01
Non hazardous waste disposed	kg	1.00E+02	1.00E+02	7.34E-02	1.65E-02	1.34E-02	6.68E-02
Radioactive waste disposed	kg	3.77E-02	3.75E-02	5.23E-05	0*	0*	1.03E-04
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.61E+01	1.59E+00	0*	1.18E+00	0*	1.34E+01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.48E-02	0*	0*	0*	0*	3.48E-02
Exported Energy	MJ	3.73E-03	3.50E-04	0*	3.38E-03	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1403002_V3	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2021	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center

http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 € www.schneider-electric.com

Published by Schneider Electric

ENVPEP1403002_V3

© 2019 - Schneider Electric - All rights reserved

11/2021