
Product Environmental Profile

Actassi Surface-Mounted Box 4 x RJ45




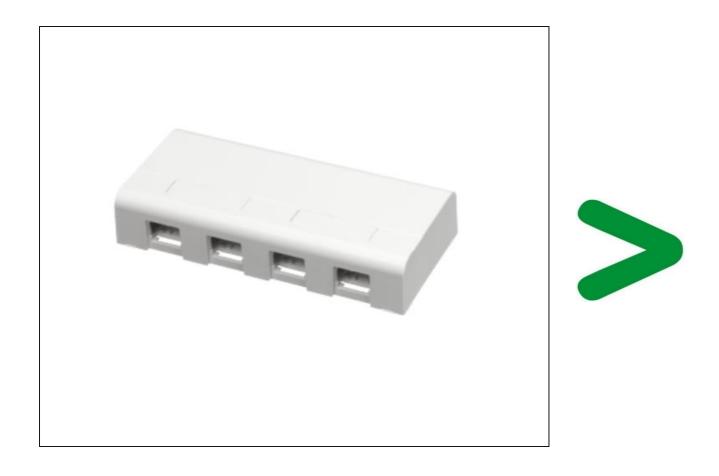

General information

Representative product	Actassi Surface-Mounted Box 4 x RJ45 - WDE002046			
Description of the product	The surface mount box provides a clean and easy option for network expansion.			
Functional unit	Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure having the following dimensions 32mm x 143mm x 69mm, while protecting against mechanical impacts (IK) and the penetration of solid objects and liquids (IP).			

Constituent materials

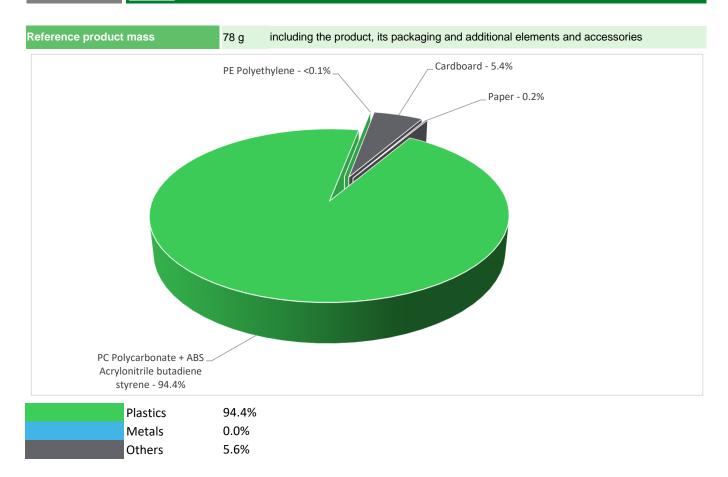

E | Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


(19) Additional environmental information

The Actassi Surface-Mounted Box 4 x RJ45 presents the following relevent environmental aspects					
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified				
Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 4.6 g, consisting of PE Film (15.2%), Cardboard (60.6%), Paper (24.2%)				
	Product distribution optimised by setting up local distribution centres				
Installation	Ref WDE002046 does not require any installation operations				
Use	The product does not require special maintenance operations.				
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials				
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.				
	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				

Environmental impacts

Reference life time	20 years					
Product category	Unequipped enclosures and cabinets					
Installation elements	Ref WDE002046 does not require any special component for the installation operations. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal).					
Use scenario	Non applicable for unequipped enclosures and cabinets					
Geographical representativeness	EUROPE					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Poland	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU- 27		

Compulsory indicators	Actassi Surface-Mounted Box 4 x RJ45 - WDE002046						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.86E-08	1.80E-08	3.78E-10	9.30E-12	0*	2.35E-10
Contribution to the soil and water acidification	$kg SO_2 eq$	9.40E-04	8.71E-04	4.31E-05	1.03E-06	0*	2.48E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	2.44E-04	2.26E-04	9.93E-06	2.54E-07	0*	8.20E-06
Contribution to global warming	kg CO ₂ eq	8.06E-01	7.77E-01	9.43E-03	2.48E-04	0*	1.91E-02
Contribution to ozone layer depletion	kg CFC11 eq	4.44E-08	4.38E-08	1.91E-11	0*	0*	6.07E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.57E-04	1.52E-04	3.08E-06	7.73E-08	0*	2.47E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2.36E-03	2.34E-03	8.44E-07	0*	0*	1.30E-05
Total Primary Energy	MJ	1.08E+01	1.05E+01	1.33E-01	3.24E-03	0*	1.15E-01

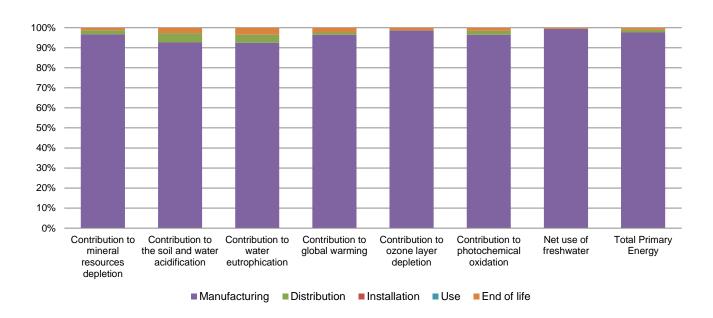

Optional indicators		Actassi Surface-Mounted Box 4 x RJ45 - WDE002046					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	6.97E+00	6.74E+00	1.33E-01	3.22E-03	0*	9.27E-02
Contribution to air pollution	m³	1.11E+02	1.10E+02	4.02E-01	0*	0*	8.59E-01
Contribution to water pollution	m³	2.75E+02	2.72E+02	1.55E+00	3.76E-02	0*	1.18E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.88E-04	1.88E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	9.75E-02	9.72E-02	1.78E-04	0*	0*	1.26E-04
Total use of non-renewable primary energy resources	MJ	1.07E+01	1.04E+01	1.33E-01	3.24E-03	0*	1.15E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.01E-02	9.75E-03	1.78E-04	5.25E-06	0*	1.26E-04
Use of renewable primary energy resources used as raw material	MJ	8.74E-02	8.74E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.63E+00	7.38E+00	1.33E-01	3.24E-03	0*	1.15E-01
Use of non renewable primary energy resources used as raw material	MJ	3.03E+00	3.03E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.98E-01	4.30E-02	0*	0*	0*	1.55E-01
Non hazardous waste disposed	kg	2.96E-01	2.96E-01	3.35E-04	4.15E-05	0*	3.50E-04
Radioactive waste disposed	kg	1.45E-04	1.45E-04	2.39E-07	0*	0*	5.72E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5.02E-03	4.72E-04	0*	4.55E-03	0*	0*
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.86E-03	0*	0*	0*	0*	3.86E-03
Exported Energy	MJ	1.44E-05	1.36E-06	0*	1.31E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2005016_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	08/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2005016_V1 © 2019 - Schneider Electric – All rights reserved

08/2020