Product Environmental Profile

30-100A VisiPacT™ F-Series Heavy Duty Safety Switch










General information

Reference product	30-100A VisiPacT™ F-Series Heavy Duty Safety Switch - VH362NAWKGL
Description of the product	The main purpose of the F-series safety switch is to isolate power and provide an effective way to interrupt power in an emergency. Two primary applications for safety switches are as a lockout on sight disconnect and as a circuit isolation device.
Functional unit	Turn off all or part of an installation by separating the installation or part of the installation of all electrical energy or earth, for safety reasons with a rated voltage 600V and rated current 60A. This function is provided for 20 years. The product qualifies for the standards UL50E Type 12, Standards UL98 & NEMA KS1.

Constituent materials

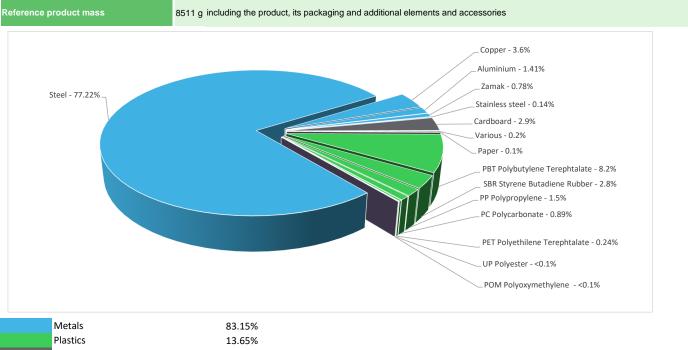

Others 3.20%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(I) Additional environmental information

End Of Life	Recyclability potential:	83%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	---



Reference service life time	20 years								
Product category	Disconnectors - Low voltage								
Installation elements	No special components needed								
Use scenario	Load rate: 50% Use time rate (closed unit): 30% of RLT								
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.								
Geographical representativeness	United States,Canada, Mexico.								
	[A1 - A3]	[A5]	[B6]	[C1 - C4]					
Energy model used	Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US	Electricity Mix; Production mix; Low voltage; US					
		Electricity Mix; Production mix; Low voltage; CA	Electricity Mix; Production mix; Low voltage; CA	Electricity Mix; Production mix; Low voltage; CA					
		Electricity Mix; Production mix; Low voltage; MX	Electricity Mix; Production mix; Low voltage; MX	Electricity Mix; Production mix; Low voltage; MX					

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators					30-100A VisiPacT™ F-Series Heavy Duty Safety Switch - VH362NAWKGL				
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits		
- Gilli	Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]		
kg CO2 eq	8.32E+01	5.00E+01	2.45E+00	2.89E-01	1.09E+01	1.96E+01	-3.85E+01		
kg CO2 eq	8.25E+01	4.93E+01	2.45E+00	2.89E-01	1.09E+01	1.95E+01	-3.81E+01		
kg CO2 eq	7.25E-01	6.51E-01	0*	0*	1.19E-02	6.23E-02	-3.23E-01		
kg CO2 eq	1.03E-06	0*	0*	0*	0*	1.03E-06	0.00E+00		
kg CFC-11 eq	8.69E-06	6.39E-06	2.17E-06	0*	4.54E-08	9.78E-08	-5.91E-06		
mol H+ eq	3.69E-01	2.29E-01	1.07E-02	1.98E-04	5.70E-02	7.19E-02	-3.66E-01		
kg (PO4)³⁻ eq	2.30E-03	7.42E-05	2.87E-07	4.99E-06	1.73E-05	2.20E-03	-6.35E-05		
kg N eq	5.99E-02	3.53E-02	4.90E-03	1.10E-04	6.79E-03	1.28E-02	-2.30E-02		
mol N eq	6.59E-01	3.83E-01	5.31E-02	8.26E-04	8.02E-02	1.42E-01	-2.68E-01		
kg COVNM eq	2.34E-01	1.45E-01	1.74E-02	2.80E-04	2.25E-02	4.95E-02	-1.01E-01		
kg Sb eq	1.87E-03	1.80E-03	0*	0*	4.74E-07	6.26E-05	-1.18E-02		
MJ	3.69E+03	2.06E+03	2.98E+01	0*	2.33E+02	1.37E+03	-8.40E+02		
m3 eq	2.54E+01	1.61E+01	1.24E-01	3.12E-03	3.87E-01	8.69E+00	-2.15E+01		
	kg CO2 eq kg CO2 eq kg CO2 eq kg CFC-11 eq mol H+ eq kg (PO4) ³⁻ eq kg N eq mol N eq kg COVNM eq kg Sb eq	kg CO2 eq 8.32E+01 kg CO2 eq 8.25E+01 kg CO2 eq 7.25E-01 kg CO2 eq 1.03E-06 kg CFC-11 8.69E-06 eq 3.69E-01 kg N eq 5.99E-02 mol N eq 6.59E-01 kg COVNM 2.34E-01 eq 2.30E-03 MJ 3.69E+03	Unit Total Manufacturing [A1 - A3] kg CO2 eq 8.32E+01 5.00E+01 kg CO2 eq 8.25E+01 4.93E+01 kg CO2 eq 7.25E-01 6.51E-01 kg CO2 eq 1.03E-06 0* kg CFC-11 eq 8.69E-06 6.39E-06 mol H+ eq 3.69E-01 2.29E-01 kg (PO4)3F eq 2.30E-03 7.42E-05 kg N eq 5.99E-02 3.53E-02 mol N eq 6.59E-01 3.83E-01 kg COVNM eq 2.34E-01 1.45E-01 kg Sb eq 1.87E-03 1.80E-03 MJ 3.69E+03 2.06E+03	Unit Total Manufacturing [A1 - A3] Distribution [A4] kg CO2 eq 8.32E+01 5.00E+01 2.45E+00 kg CO2 eq 8.25E+01 4.93E+01 2.45E+00 kg CO2 eq 7.25E-01 6.51E-01 0* kg CO2 eq 1.03E-06 0* 0* kg CFC-11 eq 8.69E-06 6.39E-06 2.17E-06 mol H+ eq 3.69E-01 2.29E-01 1.07E-02 kg (PO4)³* eq 2.30E-03 7.42E-05 2.87E-07 kg N eq 5.99E-02 3.53E-02 4.90E-03 mol N eq 6.59E-01 3.83E-01 5.31E-02 kg COVNM eq 2.34E-01 1.45E-01 1.74E-02 kg Sb eq 1.87E-03 1.80E-03 0* MJ 3.69E+03 2.98E+01	Unit Total Manufacturing [A1 - A3] Distribution [A4] Installation [A5] kg CO2 eq 8.32E+01 5.00E+01 2.45E+00 2.89E-01 kg CO2 eq 8.25E+01 4.93E+01 2.45E+00 2.89E-01 kg CO2 eq 7.25E-01 6.51E-01 0* 0* kg CO2 eq 1.03E-06 0* 0* 0* kg CFC-11 eq 8.69E-06 6.39E-06 2.17E-06 0* mol H+ eq 3.69E-01 2.29E-01 1.07E-02 1.98E-04 kg (PO4)³* eq 2.30E-03 7.42E-05 2.87E-07 4.99E-06 kg N eq 5.99E-02 3.53E-02 4.90E-03 1.10E-04 mol N eq 6.59E-01 3.83E-01 5.31E-02 8.26E-04 kg COVNM eq 2.34E-01 1.45E-01 1.74E-02 2.80E-04 kg Sb eq 1.87E-03 1.80E-03 0* 0* MJ 3.69E+03 2.06E+03 2.98E+01 0*	Unit Total Manufacturing [A1 - A3] Distribution [A4] Installation [B1 - B7] kg CO2 eq 8.32E+01 5.00E+01 2.45E+00 2.89E-01 1.09E+01 kg CO2 eq 8.25E+01 4.93E+01 2.45E+00 2.89E-01 1.09E+01 kg CO2 eq 7.25E-01 6.51E-01 0° 0° 1.19E-02 kg CO2 eq 1.03E-06 0° 0° 0° 0° kg CFC-11 eq 8.69E-06 6.39E-06 2.17E-06 0° 4.54E-08 mol H+ eq 3.69E-01 2.29E-01 1.07E-02 1.98E-04 5.70E-02 kg N eq 5.99E-02 3.53E-02 4.90E-03 1.10E-04 6.79E-03 mol N eq 6.59E-01 3.83E-01 5.31E-02 8.26E-04 8.02E-02 kg COVNM eq 2.34E-01 1.45E-01 1.74E-02 2.80E-04 2.25E-02 kg Sb eq 1.87E-03 1.80E-03 0° 0° 4.74E-07 MJ 3.69E+03 2.06E+03 2.98E+01 0° 2.33E+02	Unit Total Manufacturing [A1 - A3] Distribution [A4] Installation [B1 - B7] Use [End of Life [E1 - C4]] kg CO2 eq 8.32E+01 5.00E+01 2.45E+00 2.89E-01 1.09E+01 1.96E+01 kg CO2 eq 8.25E+01 4.93E+01 2.45E+00 2.89E-01 1.09E+01 1.95E+01 kg CO2 eq 7.25E-01 6.51E-01 0° 0° 1.19E-02 6.23E-02 kg CO2 eq 1.03E-06 0° 0° 0° 0° 1.09E+01 1.95E+01 kg CO2 eq 1.03E-06 0° 0° 0° 1.19E-02 6.23E-02 kg CO2 eq 1.03E-06 0° 0° 0° 0° 1.03E-02 6.23E-02 kg CO2 eq 1.03E-06 0° 0° 4.54E-08 9.78E-08 9.78E-08 mol H+ eq 3.69E-06 6.39E-06 2.17E-06 0° 4.54E-08 9.78E-08 kg N eq 5.99E-02 3.53E-02 4.90E-03 1.10E-04 6.79E-03 1.28E-02 mol N eq		

Inventory flows Indicators			30-100A VisiPacT™ F-Series Heavy Duty Safety Switch - VH362NAWKGL					
			Manufact.	Distribution	Installation	Use	End of Life	Benefits
Inventory flows	Unit	Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.36E+01	6.98E+00	0*	8.07E-03	3.52E+01	1.51E+00	-1.14E+01
Contribution to use of renewable primary energy resources used as raw material	MJ	4.97E+00	4.97E+00	0*	0*	0*	0*	-9.67E-02
Contribution to total use of renewable primary energy resources	MJ	4.86E+01	1.19E+01	0*	8.07E-03	3.52E+01	1.51E+00	-1.15E+01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.66E+03	2.03E+03	2.98E+01	0*	2.33E+02	1.37E+03	-8.40E+02
Contribution to use of non renewable primary energy resources used as raw material	MJ	3.19E+01	3.19E+01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	3.69E+03	2.06E+03	2.98E+01	0*	2.33E+02	1.37E+03	-8.40E+02
Contribution to use of secondary material	kg	1.90E-02	1.90E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	5.90E-01	3.76E-01	2.90E-03	7.27E-05	9.00E-03	2.02E-01	-5.01E-01
Contribution to hazardous waste disposed	kg	1.16E+02	1.07E+02	0*	0*	2.07E-01	8.53E+00	-9.45E+02
Contribution to non hazardous waste disposed	kg	2.27E+01	2.05E+01	2.50E-03	2.74E-01	1.60E+00	2.96E-01	-3.18E+01
Contribution to radioactive waste disposed	kg	1.13E-02	1.04E-02	4.88E-04	9.39E-06	3.11E-04	6.92E-05	-1.58E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	7.13E+00	2.55E-01	0*	0*	0*	6.87E+00	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	1.41E-01	0*	0*	1.41E-01	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
		_						

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number:	SCHN-00957-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06				
Verifier accreditation N°	VH18	Supplemented by	PSR-0005-ed2-2016 03 29				
Date of issue	2023/11	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010							
Internal External X							
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)							
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019							

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS Country Customer Care Center

http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.se.com

SCHN-00957-V01.01-EN

Published by Schneider Electric

©2023 - Schneider Electric - All rights reserved

2023/11