
# **Product Environmental Profile**

#### Acti 9 Vigi Block (Add-on RCD Module, 4 Pole)





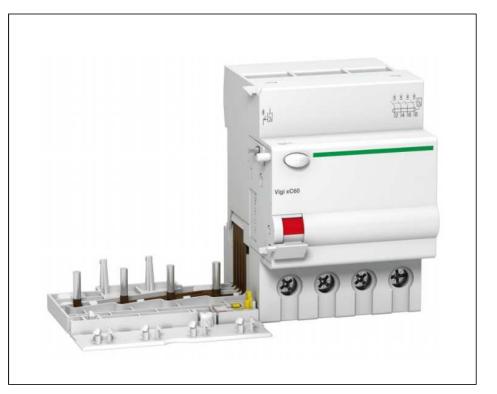

ENVPEP050904EN\_V2-EN 11/2017


### General information

Representative product	Acti 9 Vigi Block (Add-on RCD Module, 4 Pole) - A9N26595				
Description of the product	Assembled with circuit breaker, it provides protection of persons against electric shock by direct contact and indirect contact, protection agianst fire ignition by leakage currents, and protection of loads against supply voltage increase.				
Functional unit	Protect during 20 years people and premises at risk of fire or explosion against insulation defects in circuit with insulation voltage 500V and rated current 25A. This protection is ensured in accordance with the following parameters:  - Number of poles 4P  - Sensitivity S: 30mA  - Type of differential protection Tp: AC				

#### Constituent materials

Reference product mass

178 g including the product, its packaging and additional elements and accessories

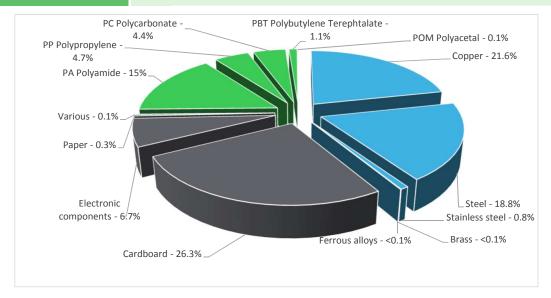

Plastics 25.3%
Metals 41.2%
Others 33.4%

### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

ENVPEP050904EN V2-EN 11/2017



## Additional environmental information

The Acti 9 Vigi Block (Add-on RCD Module, 4 Pole) presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 48.26 g, consisting of cardboard (98.8%), paper (1.2%)					
Installation	Ref A9N26595 does not require any installation operations					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materi					
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Recyclability potential:  Based on "ECO'DEEE recyclability and recoverability calculation method"  (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					




### **Proposition** Environmental impacts

Reference life time	20 years					
Product category	Blocks and differential switches					
Installation elements	No special components needed					
Use scenario	Load rate: 50% of In Use time rate: 30% of RLT					
Geographical representativeness	India					
Technological representativeness	Assembled with circuit breaker, it provides protection of persons against electric shock by direct contact and indirect contact, protection agianst fire ignition by leakage currents, and protection of loads against supply voltage increase.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: France	Electricity mix; AC; consumption mix, at consumer; 230V; IN	Electricity mix; AC; consumption mix, at consumer; 230V; IN	Electricity mix; AC; consumption mix, at consumer; 230V; IN		

Compulsory indicators	Acti 9 Vigi Block (Add-on RCD Module, 4 Pole) - A9N26595						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.22E-04	1.21E-04	0*	0*	1.66E-06	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	3.40E-01	6.18E-03	1.05E-04	0*	3.34E-01	3.98E-05
Contribution to water eutrophication	kg PO <sub>4</sub> 3- eq	8.94E-02	1.18E-03	2.42E-05	0*	8.82E-02	1.06E-05
Contribution to global warming	$kg CO_2 eq$	3.20E+02	9.77E-01	0*	0*	3.19E+02	0*
Contribution to ozone layer depletion	kg CFC11 eq	8.99E-06	1.01E-07	0*	0*	8.89E-06	0*
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	4.31E-02	4.38E-04	7.48E-06	0*	4.27E-02	0*
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.61E-01	1.21E-02	0*	0*	3.49E-01	0*
Total Primary Energy	MJ	4.92E+03	1.41E+01	0*	0*	4.90E+03	0*

11/2017 ENVPEP050904EN\_V2-EN

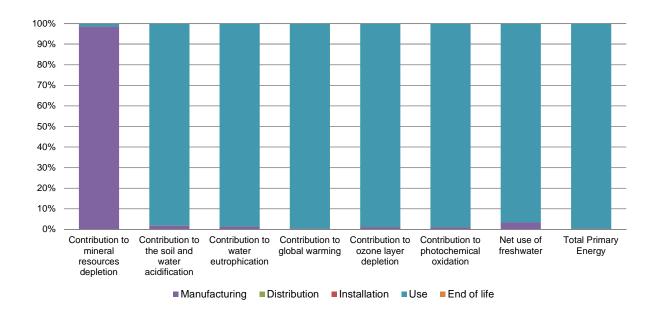

Optional indicators		Acti 9 Vigi Block (Add-on RCD Module, 4 Pole) - A9N26595					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.02E+03	1.11E+01	0*	0*	5.01E+03	0*
Contribution to air pollution	m³	3.19E+04	3.35E+02	0*	0*	3.16E+04	0*
Contribution to water pollution	m³	1.62E+04	2.37E+02	3.78E+00	0*	1.60E+04	1.63E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.78E-03	6.78E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.31E+02	1.32E+00	0*	0*	2.30E+02	0*
Total use of non-renewable primary energy resources	MJ	4.69E+03	1.28E+01	0*	0*	4.67E+03	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.30E+02	3.21E-01	0*	0*	2.30E+02	0*
Use of renewable primary energy resources used as raw material	MJ	9.95E-01	9.95E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.68E+03	1.12E+01	0*	0*	4.67E+03	0*
Use of non renewable primary energy resources used as raw material	MJ	1.56E+00	1.56E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.84E+01	8.63E+00	0*	0*	9.55E+00	1.92E-01
Non hazardous waste disposed	kg	5.34E+01	3.94E-01	0*	0*	5.30E+01	0*
Radioactive waste disposed	kg	4.03E-03	2.64E-04	5.81E-07	0*	3.76E-03	9.42E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.41E-01	1.79E-02	0*	4.81E-02	0*	7.47E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.25E-03	2.85E-04	0*	0*	0*	1.96E-03
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

ENVPEP050904EN\_V2-EN 11/2017

Registration number	ENVPEP050904EN_V2-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2017	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

ENVPEP050904EN\_V2-EN © 2017 - Schneider Electric – All rights reserved 11/2017

ENVPEP050904EN\_V2-EN 11/2017