
Product Environmental Profile

WIBE METAL CABLE TRAY




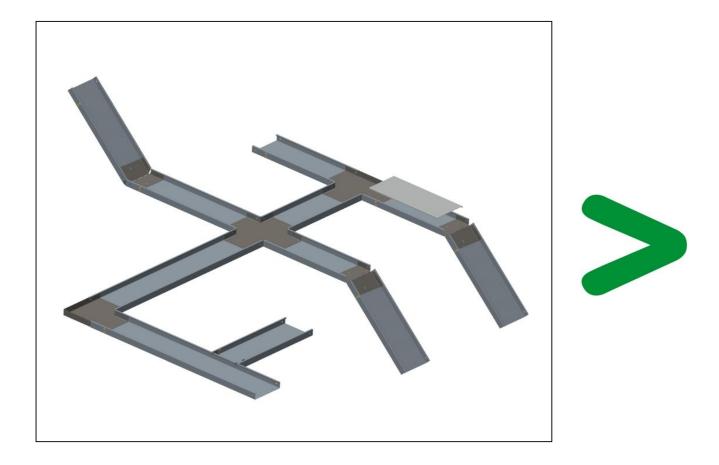

Representative product	WIBE METAL CABLE TRAY - 713254, 717905, 723228, 717915, 716640, 791417					
Description of the product	The main fiunction of Wibe metal cable tray is to act as complete cable support system for the routing of power, data and control cables in light-, medium- and heavy-duty commercial buildings, industrial and OEM applications.					
Functional unit	Support the wiring along 1 meter for a reference life time of 20 years. The cable tray system, capable of supporting a load of 103 kg per 1 meter on a span of 1.5 m, includes the profile and cable management and support accessories typical of standard use.					

Constituent materials

Conoral information

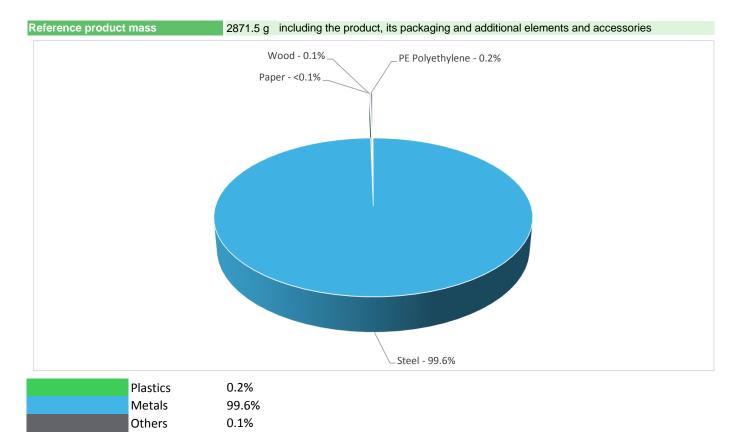

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

	The WIBE METAL CABLE TRAY presents the following relevent environmental aspects				
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified				
	Weight and volume of the packaging optimized, based on the European Union's packaging directive				
Distribution	Packaging weight is 11.3 g, consisting of PE film (60.48%), wood (32.96%), paper (6.56%)				
	Product distribution optimised by setting up local distribution centres				
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials is accounted during the installation phase (including transport to disposal).				
Use	The product does not require special maintenance operations.				
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials				
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.				
	Recyclability potential:94%Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				

P Environmental impacts

Reference life time	20 years					
Product category	Unequipped enclosures and cabinets					
Installation elements	No special components needed					
Use scenario	Non applicable for unequipped enclosures and cabinets					
Geographical representativeness	Nordic countries					
Technological representativeness	The main fiunction of Wibe metal cable tray is to act as complete cable support system for the routing of power, data and control cables in light-, medium- and heavy-duty commercial buildings, industrial and OEM applications.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Manufacturing Plant: Mora, Sweden	Electricity grid mix 1kV- 60kV; AC; consumption mix, at consumer; 1kV - 60kV; SE	Electricity grid mix 1kV- 60kV; AC; consumption mix, at consumer; 1kV - 60kV; SE	Electricity grid mix 1kV- 60kV; AC; consumption mix, at consumer; 1kV - 60kV;		

Compulsory indicators		WIBE META	L CABLE TRAY -	713254, 71790	5, 723228, 71	7915, 71664	0, 791417
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3.69E-04	3.69E-04	5.53E-08	0*	0*	0*
Contribution to the soil and water acidification	kg SO_2 eq	3.03E-02	2.33E-02	6.23E-03	0*	0*	8.20E-04
Contribution to water eutrophication	kg PO₄ ³⁻ eq	3.39E-03	1.76E-03	1.43E-03	8.53E-06	0*	1.93E-04
Contribution to global warming	kg CO ₂ eq	9.98E+00	8.33E+00	1.38E+00	6.28E-03	0*	2.66E-01
Contribution to ozone layer depletion	kg CFC11 eq	1.31E-07	1.11E-07	2.80E-09	1.37E-11	0*	1.70E-08
Contribution to photochemical oxidation	kg C_2H_4 eq	3.74E-03	3.21E-03	4.43E-04	1.42E-06	0*	8.88E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	7.83E-02	7.78E-02	1.24E-04	0*	0*	3.25E-04
Total Primary Energy	MJ	5.41E+02	5.17E+02	1.95E+01	0*	0*	4.14E+00

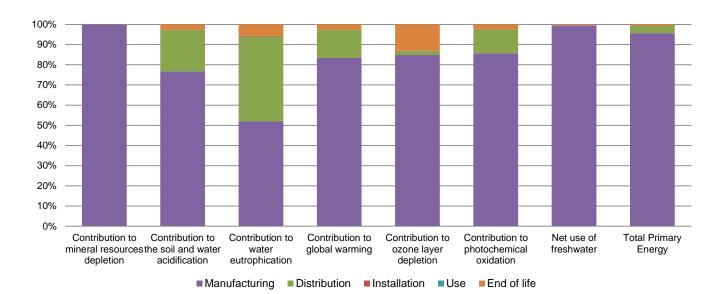

Optional indicators		WIBE META	L CABLE TRAY -	713254, 71790	5, 723228, 717	915, 716640,	791417
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.10E+02	8.68E+01	1.94E+01	0*	0*	3.76E+00
Contribution to air pollution	m³	1.62E+03	1.53E+03	5.72E+01	0*	0*	2.92E+01
Contribution to water pollution	m³	3.02E+02	4.35E+01	2.27E+02	0*	0*	3.12E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.03E+00	1.03E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.77E-01	2.46E-01	2.60E-02	1.48E-04	0*	4.64E-03
Total use of non-renewable primary energy resources	MJ	5.40E+02	5.17E+02	1.95E+01	0*	0*	4.13E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.86E-01	1.55E-01	2.60E-02	1.48E-04	0*	4.64E-03
Use of renewable primary energy resources used as raw material	MJ	9.11E-02	9.11E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.40E+02	5.16E+02	1.95E+01	0*	0*	4.13E+00
Use of non renewable primary energy resources used as raw material	MJ	3.56E-01	3.56E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.36E+01	2.06E+01	0*	0*	0*	3.04E+00
Non hazardous waste disposed	kg	7.62E-01	6.95E-01	4.91E-02	5.12E-03	0*	1.28E-02
Radioactive waste disposed	kg	3.62E-04	3.07E-04	3.50E-05	1.71E-07	0*	1.96E-05
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.97E+00	2.82E-01	0*	0*	0*	2.68E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	6.86E-03	0*	0*	6.86E-03	0*	0*
Exported Energy	MJ	4.07E-03	2.41E-04	0*	3.83E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.7.0.4, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

ENVPEP1805015_V1 - Product Environmental Profile - WIBE METAL CABLE TRAY

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1805015_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	12/2018	Supplemented by	PSR-0003-ed1.1-EN-2015 10 16
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP1805015_V1

Published by Schneider Electric

© 2017 - Schneider Electric - All rights reserved

12/2018