
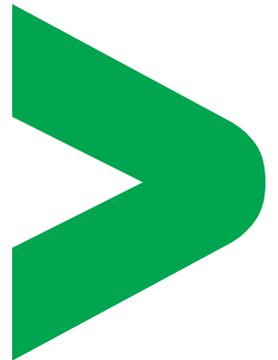


Product Environmental Profile

Performa mesh trays

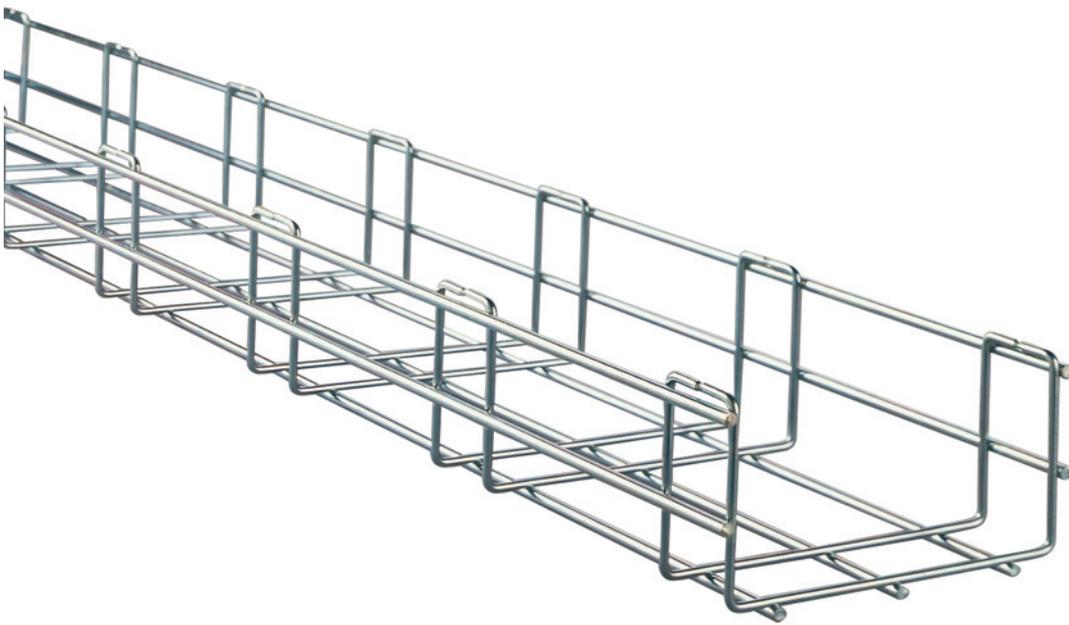

Product Environmental Profile - PEP

Product Overview

The main function of the PERFORMA MESH TRAY product range is to route power and data cables in industrial, infrastructure and commercial building applications.

This range consists of:

1. MESH cable tray available with four different coatings; electro-zinc, bi-chromatic, hot dip galvanized and stainless steel.
2. Accessories and components such as lid, wall dividers, joints, specials profiles and brackets for all sizes.

The representative product used for the analysis is a singular installation consisting of several components, which represent the grade point average of each product family. For the environmental indicators, the results are given in reference to 1 meter.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with the same technology.

The environmental analysis was performed in conformity with ISO 14040 "Environmental management: Life cycle assessment – Principle and framework".


This analysis takes the stages in the life cycle of the product into account.

Constituent materials

The mass of the range products spreads out between 8 g and 4100 g, packing excluded.

It is 21.6 kg for the analysed installation consisting of 12 m of cable tray, 1 accessory, 8 brackets and 15 fixation system. However the final environmental indicators are given in reference to 1 meter.

The constituent materials are distributed as follows:

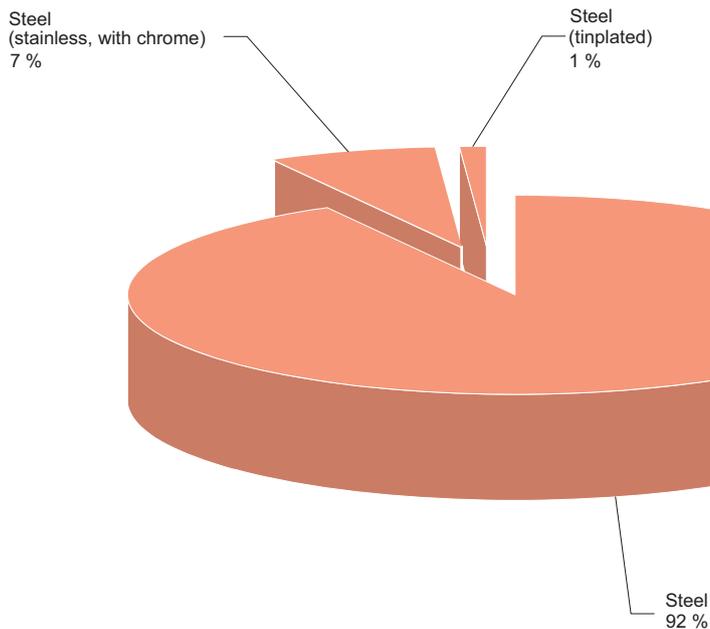

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or in the authorised proportions, lead, mercury, cadmium, chromium hexavalent, flame retardant (polybromobiphenyles PBB, polybromodiphenylthers PBDE) as mentioned in the Directive.

Manufacturing

The PERFORMA MESH TRAY product range is manufactured at a Schneider Electric production site on which an ISO 14001 certified environmental management system has been established.

Product Environmental Profile - PEP

Distribution

The weight and volume of the packaging have been reduced, in compliance with the European Union's packaging directive. The PERFORMA MESH TRAY packaging weight is 43 g. It consists of 8.8 g (20 %) of cardboard, 30 g (70 %) of polyethylene and 4.2 g (10 %) of PVC.

The product distribution flows have been optimized by setting up local distribution centres close to the market areas.

Utilization

The products of the PERFORMA MESH TRAY range do not generate environmental pollution requiring special precautionary measures (noise, emissions, and so on).

The products involved in the application analysed are passive products which do not dissipate any significant heat in the installation.

End of life

At end of life, the products of the PERFORMA MESH TRAY range must be dismantled to facilitate the recovery of the various constituent materials.

The product is potentially recyclable.

Environmental impacts

The EIME (Environmental Impact and Management Explorer) software, 1.6 version, and its database, 5.4 version were used for the life cycle assessment (LCA).

The assumed service life of the product is 20 years and the European electrical power model was used.

The scope of the analysis was limited to a singular installation consisting of several components, which represent the grade point average of each product family.

The environmental impacts were analysed for the Manufacturing (M) phases, including the processing of raw materials, and for the Distribution (D) and Utilization (U) phases.

Presentation of the environmental impacts per linear meter:

Environmental indicators	Short	Unit	Mesh Cable tray (1 linear meter)			
			S = M + D + U	M	D	U
Raw material depletion	RMD	Y-1	4.58E ⁻¹⁴	4.5708E ⁻¹⁴	1.4112E ⁻¹⁶	0
Energy depletion	ED	MJ	793.2667	711.174967	82.0891673	0
Water depletion	WD	dm ³	473.8333	465.725016	8.11091677	0
Global warming	GW	g ~CO ₂	71165	63411.6667	7753.58333	0
Ozone depletion	OD	g ~CFC-11	0.008216	0.00399383	0.00422258	0
Photochemical ozone creation	POC	g ~C ₂ H ₄	12.5525	7.31991641	5.23241679	0
Air acidification	AA	g ~H ⁺	8.505	6.33374977	2.17158333	0
Hazardous waste production	HWP	kg	0.004011	0	0.00401058	0

The life cycle analysis shows that the manufacturing phase (M) is the life cycle phase which has the greatest impact on the majority of environmental indicators. Schneider Electric places strong importance in the design process on the choice of materials to be used to optimize impacts on the environment.

Product Environmental Profile - PEP

System approach

As the product of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction within an assembly or an installation submitted to this Directive.

*N.B.: please note that the environmental impacts of the product depend on the use and installation conditions of the product.
Impacts values given above are only valid within the context specified and cannot be directly used to draw up the environmental assessment of the installation.*

Glossary

Raw Material Depletion (RMD)

This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.

Energy Depletion (ED)

This indicator gives the quantity of energy consumed, whether it be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.

Water Depletion (WD)

This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm³.

Global Warming (GW)

The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO₂.

Ozone Depletion (OD)

This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.

Photochemical Ozone Creation (POC)

This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C₂H₄).

Air Acidification (AA)

The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H⁺.

Hazardous Waste Production (HWP)

This indicator calculates the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.

Registration No.: SCHN-2011-264-V0

Programme information: www.pep-ecopassport.org

PEP in compliance with PEPecopassport according to PEP-AP0011 rules

ACV rules are available from PEP editor on request

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com



We are committed to safeguarding our planet by "Combining innovation and continuous improvement to meet the new environmental challenges".

Published by: Schneider Electric